

KLV-S26A10/S32A10/S40A10

SERVICE MANUAL

KLV-S26A10/S32A10

US Model

Canadian Model


KLV-S32A10

Taiwan Model

KLV-S40A10

Canadian Model

Mexican Model

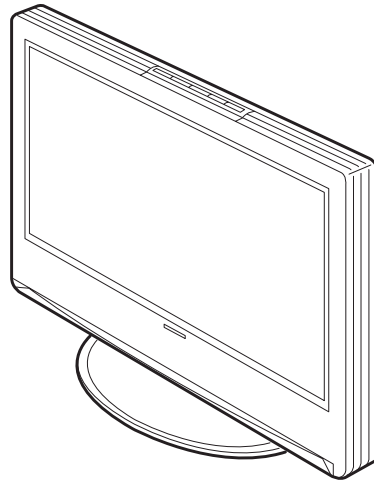

WAX CHASSIS

SPECIFICATIONS

Television system:

American TV standard

Channel coverage:

VHF: 2-13/UHF: 14-69/CATV: 1-125

Antenna:

75-ohm external terminal for VHF/UHF

Screen size (measured diagonally):

KLV-S26A10: 26 inches

KLV-S32A10: 32 inches

KLV-S40A10: 40 inches

Panel System:

LCD (Liquid Crystal Display) Panel

Display resolution (horizontal 4 vertical):

1,366 dots 4 768 lines

VIDEO IN 1/2/3:

S VIDEO (4-pin mini DIN):

Y: 1.0 Vp-p, 75 ohms unbalanced, sync negative

C: 0.286 Vp-p (Burst signal), 75 ohms

VIDEO: 1 Vp-p, 75 ohms unbalanced, sync negative

AUDIO: 500 mVrms (100% modulation)

Impedance: 47 kilohms

HD/DVD IN 4:

YPbPr (Component Video):

Y: 1.0 Vp-p, 75 ohms unbalanced, sync negative

PB: 0.7 Vp-p, 75 ohms

Pr: 0.7 Vp-p, 75 ohms

Signal format: 480i, 480p, 720p, 1080i

500 mVrms (100% modulation)

Impedance: 47 kilohms

AUDIO:**HDMI IN 5:**

HDMI:

Video: 480i, 480p, 720p, 1080i

Audio: Two channel linear PCM 32, 44.1 and 48 kHz, 16, 20 and 24 bits

AUDIO:

500 mVrms (100% modulation)

Impedance: 47 kilohms

AUDIO OUT:

500 mVrms (100% modulation)

More than 1 Vrms at the maximum volume setting (Variable)

More than 500 mVrms (Fixed)

PC IN 6:

D-sub 15-pin, analog RGB, 0.7 Vp-p, 75 ohms, positive

See the PC Input Signal Compatibility Chart on page 52

PC AUDIO INPUT:

Stereo mini jack, 0.5 Vrms, 1 kilohm

Headphones:

Stereo mini jack

Impedance: 16 ohms

SONY®

LCD COLOR TV

www.electronicsrepair.net

Speaker:

Full range: 4.2 × 15 cm (1 ¹¹/₁₆ × 6 inches) (2)
(KLV-S26A10)
5.5 × 15 cm (2 ¹/₄ × 6 inches) (2)
(KLV-S32A10/S40A10)

Speaker output:

10 W + 10 W

Power requirement:

120 V-240 V AC, 50/60 Hz

Power consumption:

In use: KLV-S26A10: 120 W
KLV-S32A10: 155 W
KLV-S40A10: 230 W
In standby: Less than 1 W

Dimensions (W/H/D):

KLV-S26A10: (with stand) 658 × 517 × 309 mm
(26 × 20 ³/₈ × 12 ¹/₄ inches)
(without stand) 658 × 474 × 90 mm
(26 × 18 ³/₄ × 3 ⁵/₈ inches)
KLV-S32A10: (with stand) 792 × 608 × 309 mm
(31 ¹/₄ × 24 × 12 ¹/₄ inches)
(without stand) 792 × 564 × 99 mm
(31 ¹/₄ × 22 ¹/₄ × 4 inches)
KLV-S40A10: (with stand) 999 × 740 × 370 mm
(39 ³/₈ × 29 ¹/₄ × 14 ⁵/₈ inches)
(without stand) 999 × 693 × 103 mm
(39 ³/₈ × 27 ³/₈ × 4 ¹/₈ inches)

Mass:

KLV-S26A10: (with stand) 16.6 kg (36 lb. 10 oz.)
(without stand) 12.8 kg (28 lb. 4 oz.)
KLV-S32A10: (with stand) 20.5 kg (45 lb. 4 oz.)
(without stand) 16.7 kg (36 lb. 14 oz.)
KLV-S40A10: (with stand) 33 kg (72 lb. 13 oz.)
(without stand) 26.5 kg (58 lb. 7 oz.)

Supplied accessories:

Remote control RM-YA001 (1)
Size AA batteries (2)
75-ohm coaxial cable (1)
AC power cord (1)
HD15-HD15 cable (1)
Support belt (1), securing screw (1) and wood screw (1)
Operating Instructions (1)
QuickSetup Guide (1)
Warranty Card (1)
Leaflet (Installing the Wall-Mount Bracket (1) (KLV-S40A10))

Optional accessories:

Headphones plug adaptor
Connecting cables
Wall-Mount Bracket SU-WL31 (KLV-S26A10/S32A10)
Wall-Mount Bracket SU-PW2 (KLV-S40A10)



Optional accessories' availability may depend on its stock.

Design and specifications are subject to change without notice.

WARNINGS AND CAUTIONS

CAUTION


These servicing instructions are for use by qualified service personnel only. To reduce the risk of electric shock, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.

WARNING!!

An isolation transformer should be used during any service to avoid possible shock hazard, because of live chassis. The chassis of this receiver is directly connected to the ac power line.



SAFETY-RELATED COMPONENT WARNING!!

Components identified by shading and  mark on the schematic diagrams, exploded views, and in the parts list are critical for safe operation. Replace these components with Sony parts whose part numbers appear as shown in this manual or in supplements published by Sony. Circuit adjustments that are critical for safe operation are identified in this manual. Follow these procedures whenever critical components are replaced or improper operation is suspected.


ATTENTION!!

Ces instructions de service sont à l'usage du personnel de service qualifié seulement. Pour prévenir le risque de choc électrique, ne pas faire l'entretien autre que celui contenu dans le Mode d'emploi à moins que vous soyez qualifié faire ainsi.

Afin d'éviter tout risque d'électrocution provenant d'un châssis sous tension, un transformateur d'isolement doit être utilisé lors de tout dépannage. Le châssis de ce récepteur est directement raccordé à l'alimentation du secteur.



ATTENTION AUX COMPOSANTS RELATIFS A LA SECURITE!!

Les composants identifiés par une trame et par une marque  sur les schémas de principe, les vues explosées et les listes de pièces sont d'une importance critique pour la sécurité du fonctionnement. Ne les remplacer que par des composants Sony dont le numéro de pièce est indiqué dans le présent manuel ou dans des suppléments publiés par Sony. Les réglages de circuit dont l'importance est critique pour la sécurité du fonctionnement sont identifiés dans le présent manuel. Suivre ces procédures lors de chaque remplacement de composants critiques, ou lorsqu'un mauvais fonctionnement suspecte.

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

1. Check the area of your repair for unsoldered or poorly-soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are “pinched” or contact high-wattage resistors.
3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.
4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
5. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
7. Check the antenna terminals, metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC Leakage. Check leakage as described right.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes).

Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOMs that are suitable. Nearly all battery operated digital multimeters that have a 2 V AC range are suitable. (See Fig. A)

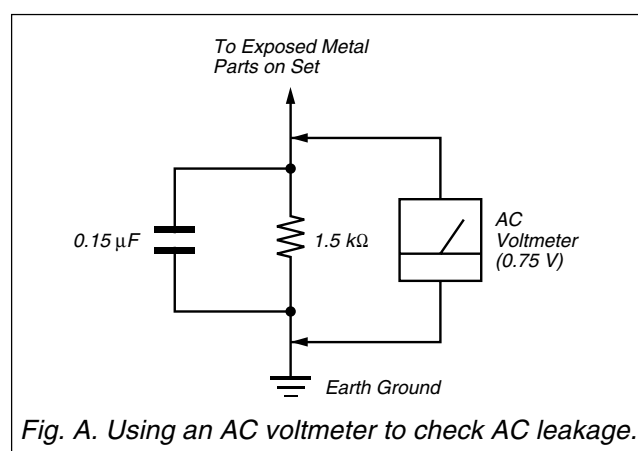


Fig. A. Using an AC voltmeter to check AC leakage.

WARNING!!

SAFETY-RELATED COMPONENT WARNING!!
COMPONENTS IDENTIFIED BY SHADING AND MARK ⚠ ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL FOR SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL FOR SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

AVERTISSEMENT!!

ATTENTION AUX COMPOSANTS RELATIFS À LA SÉCURITÉ!!
LES COMPOSANTS IDENTIFIÉS PAR UNE TRAME ET UNE MARQUE ! SONT CRITIQUES POUR LA SÉCURITÉ. NE LES REMPLACER QUE PAR UNE PIÈCE PORTANT LE NUMÉRO SPECIFIÉ. LES RÉGLAGES DE CIRCUIT DONT L'IMPORTANCE EST CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT SONT IDENTIFIÉS DANS LE PRÉSENT MANUEL. SUIVRE CES PROCÉDURES LORS DE CHAQUE REMPLACEMENT DE COMPOSANTS CRITIQUES, OU LORSQU'UN MAUVAIS FONCTIONNEMENT EST SUSPECTÉ.


TABLE OF CONTENTS

| | | | |
|--|------------|--|------|
| 1. SELF-DIAGNOSIS FUNCTION | 1-1 | | |
| 1-1. CONTROL BUTTONS | 1-1 | | |
| 1-2. LED BLINKING PATTERNS AND MONITORING ITEMS | 1-2 | | |
| 2. DISASSEMBLY | 2-1 | | |
| 2-1. KLV-S26A10/S32A10 | 2-1 | | |
| 2-1-1. STAND ASSY REMOVAL | 2-1 | | |
| 2-1-2. REAR CABINET ASSY REMOVAL | 2-1 | | |
| 2-1-3. H1 BOARD REMOVAL | 2-2 | | |
| 2-1-4. VESA BRACKET ASSY REMOVAL | 2-2 | | |
| 2-1-5. SIDE BRACKET ASSY AND S1 TOP SHIELD REMOVAL | 2-3 | | |
| 2-1-6. G2 AND H2 BOARDS REMOVAL | 2-3 | | |
| 2-1-7. A3U BOARD REMOVAL | 2-4 | | |
| 2-1-8. P AND TU BOARDS REMOVAL | 2-4 | | |
| 2-1-9. B BOARD REMOVAL | 2-5 | | |
| 2-1-10. H3 BOARD AND SPEAKER REMOVAL | 2-5 | | |
| 2-1-11. LCD PANEL REMOVAL | 2-6 | | |
| 2-2. KLV-S40A10 | 2-7 | | |
| 2-2-1. STAND ASSY REMOVAL | 2-7 | | |
| 2-2-2. REAR CABINET ASSY REMOVAL | 2-7 | | |
| 2-2-3. H1 BOARD REMOVAL | 2-8 | | |
| 2-2-4. VESA BRACKET ASSY AND G SHIELD ASSY REMOVAL | 2-8 | | |
| 2-2-5. SIDE BRACKET ASSY AND S1 TOP SHIELD REMOVAL | 2-9 | | |
| 2-2-6. H2 BOARD REMOVAL | 2-9 | | |
| 2-2-7. G3 BOARD REMOVAL | 2-10 | | |
| 2-2-8. A3U BOARD REMOVAL | 2-10 | | |
| 2-2-9. TU BOARD REMOVAL | 2-11 | | |
| 2-2-10. P BOARD REMOVAL | 2-11 | | |
| 2-2-11. B BOARD REMOVAL | 2-12 | | |
| 2-2-12. H3 BOARD AND SPEAKER REMOVAL .. | 2-12 | | |
| 2-2-13. LCD PANEL REMOVAL | 2-13 | | |
| 3. SERVICE MODE | 3-1 | | |
| 3-1. DISPLAYING SERVICE MENU | 3-1 | | |
| 3-2. ADJUSTMENT USING THE SERVICE MENU | 3-1 | | |
| 4. DIAGRAMS | 4-1 | | |
| 4-1. BLOCK DIAGRAMS | 4-1 | | |
| (1) A3U (1/2), TU and H2 Boards | 4-1 | | |
| (2) A3U (2/2) Board | 4-2 | | |
| (3) B, H1 and H3 Boards | 4-3 | | |
| (4) G2 Board (KLV-S26/S32A10 ONLY) | 4-4 | | |
| (5) G3 Board (KLV-S40A10 ONLY) | 4-5 | | |
| (6) P Board | 4-6 | | |
| 4-2. FRAME DIAGRAMS | 4-7 | | |
| 4-3. CIRCUIT BOARDS LOCATION | 4-8 | | |
| | | 4-4. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS | 4-8 |
| | | (1) Schematic Diagrams of A3U Board | 4-9 |
| | | (2) Schematic Diagram of G2 Board (KLV-S26/S32A10 ONLY) | 4-15 |
| | | (3) Schematic Diagrams of G3 Board (KLV-S40A10 ONLY) | 4-17 |
| | | (4) Schematic Diagram of H1 and H2 Boards | 4-20 |
| | | (5) Schematic Diagram of H3 Board | 4-21 |
| | | (6) Schematic Diagram of TU Board | 4-22 |
| | | 4-5. SEMICONDUCTORS | 4-23 |
| 5. EXPLODED VIEWS | 5-1 | | |
| 5-1. KLV-S26A10/S32A10 | 5-2 | | |
| 5-1-1. REAR CABINET ASSY AND STAND ASSY | 5-2 | | |
| 5-1-2. CHASSIS-1 | 5-3 | | |
| 5-1-3. CHASSIS-2 | 5-4 | | |
| 5-1-4. CHASSIS-3 | 5-5 | | |
| 5-1-5. CHASSIS-4 | 5-6 | | |
| 5-1-6. LCD PANEL | 5-7 | | |
| 5-1-7. PACKING MATERIALS (KLV-S26A10) (Made in Japan) | 5-8 | | |
| 5-1-8. PACKING MATERIALS (KLV-S26/S32A10 (UC)) (Made in USA) | 5-9 | | |
| 5-1-9. PACKING MATERIALS (KLV-S32A10 (UC)) (Made in Japan) | 5-10 | | |
| 5-1-10. PACKING MATERIALS (KLV-S32A10 (WB)) (Made in Japan) | 5-11 | | |
| 5-2. KLV-S40A10 | 5-12 | | |
| 5-2-1. REAR CABINET ASSY AND STAND ASSY | 5-12 | | |
| 5-2-2. CHASSIS-1 | 5-13 | | |
| 5-2-3. CHASSIS-2 | 5-14 | | |
| 5-2-4. CHASSIS-3 | 5-15 | | |
| 5-2-5. CHASSIS-4 | 5-16 | | |
| 5-2-6. LCD PANEL | 5-17 | | |
| 5-2-7. PACKING MATERIALS (KLV-S40A10 (CND/MX)) | 5-18 | | |
| 6. ELECTRICAL PARTS LIST | 6-1 | | |

SECTION 1

SELF-DIAGNOSIS FUNCTION

1-1. CONTROL BUTTONS

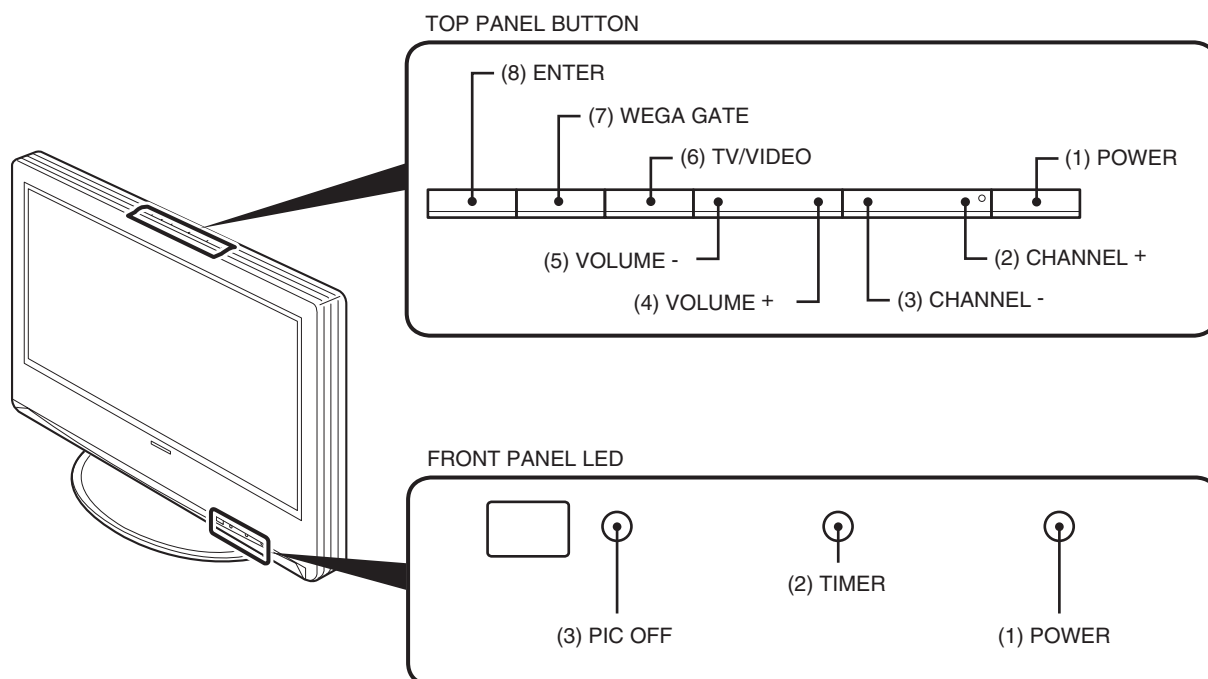

• Description of LED indicators

| LED | LED type | Description |
|-------------|---------------|--|
| POWER LED | Red/green LED | Lights green while the TV set is powered on. Lights red during recording. Lights during timer recording. Also functions as an aging failure indicator. |
| TIMER LED | Red LED | Lights during standby mode. Also functions as an aging failure indicator. |
| PIC OFF LED | Red/green LED | Lights when timer is set. Lights while no picture is displayed. Blinks during communication. With respect to communication, this LED is controlled by the main microcomputer in response to blinking/lighting instructions from the DTT module. |

• LED control

| Status | Power LED | Timer LED | Picture Off LED | Remarks |
|-------------|--------------|------------|-----------------|---|
| Power Off | Off | Off | Off | This status is made by power off with the power switch or remote control. Standby state does not exist in WAX-U/C. However, the microcomputer enters into the sleep mode. |
| Power On | Lights green | Off | Off | Microcomputer works normally. |
| Failure | Blinks red | Off | Off | Failure causes are classified by number of red blinking times. |
| Aging | Blinks green | Off | Off | Aging time is classified by green blinking method. |
| Picture OFF | Lights green | Off | Lights green | No display (black screen). |
| OFF Timer | Lights green | Lights red | Off | When OFF TIMER is set during power-on. |
| | Lights green | Lights red | Lights green | When OFF TIMER is set with black screen. |
| ON Timer | Off | Lights red | Off | When ON TIMER is set during power-off. |
| | Lights green | Lights red | Off | When ON TIMER is set during power-on. |
| | Lights green | Lights red | Lights green | When ON TIMER is set with black screen. |

1-2. LED BLINKING PATTERNS AND MONITORING ITEMS

- (1) The following table shows LED blinking patterns to be used for reporting causes in the case of safety shutdown.
- (2) Since the TV set is provided with many failure items, causes of shutdown can be identified by the following blinking patterns.

- Diagnosis items based on blinking patterns


| Number of TIMER LED blinking times | Monitoring item |
|------------------------------------|--|
| Once | Abnormal AU power voltage (DCALERT 3) |
| Twice | Abnormal D5V/A9V voltage (DCALERT 2) |
| 3 times | Abnormal panel/HFE voltage (DCALERT 1) |
| 4 times | Backlight failure |
| 5 times | Abnormal main power voltage |
| 6 times | Abnormal speaker voltage |
| 7 times | Internal temperature rise (mainly on the panel side) |
| 8 times | Trident IC failure |

SECTION 2 DISASSEMBLY



Note: Illustrations are created based on KLV-S26A10.

2-1. KLV-S26A10/S32A10

2-1-1. STAND ASSY REMOVAL

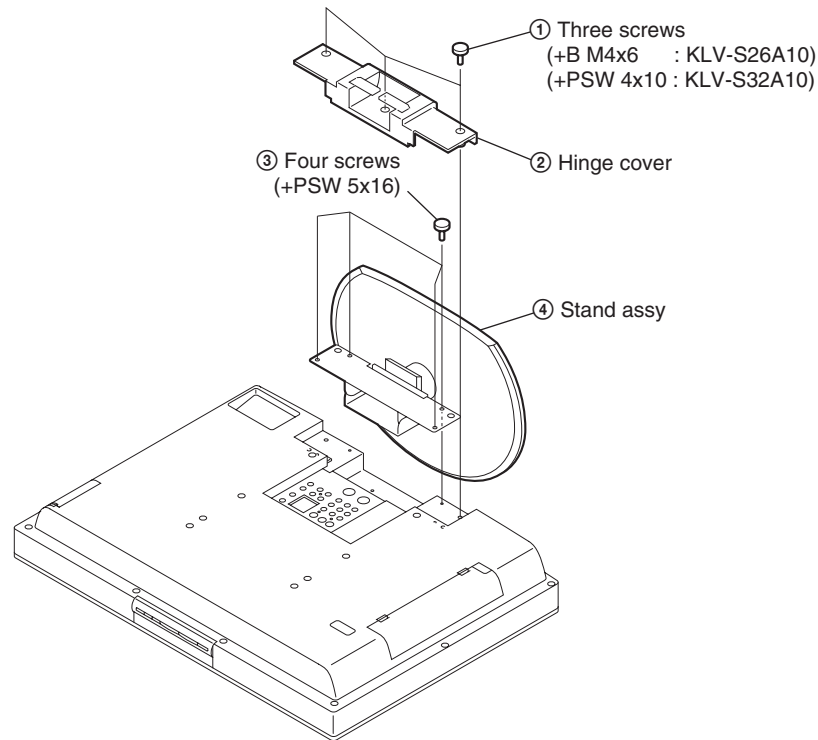


2-1-2. REAR CABINET ASSY REMOVAL

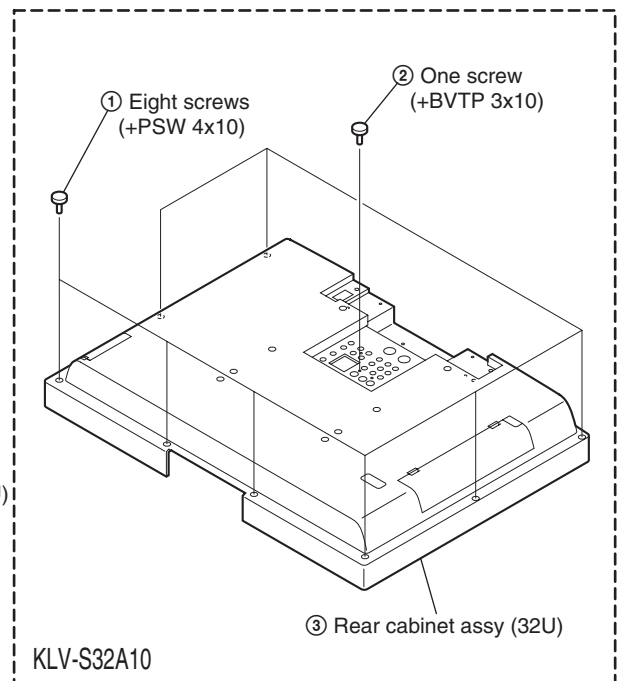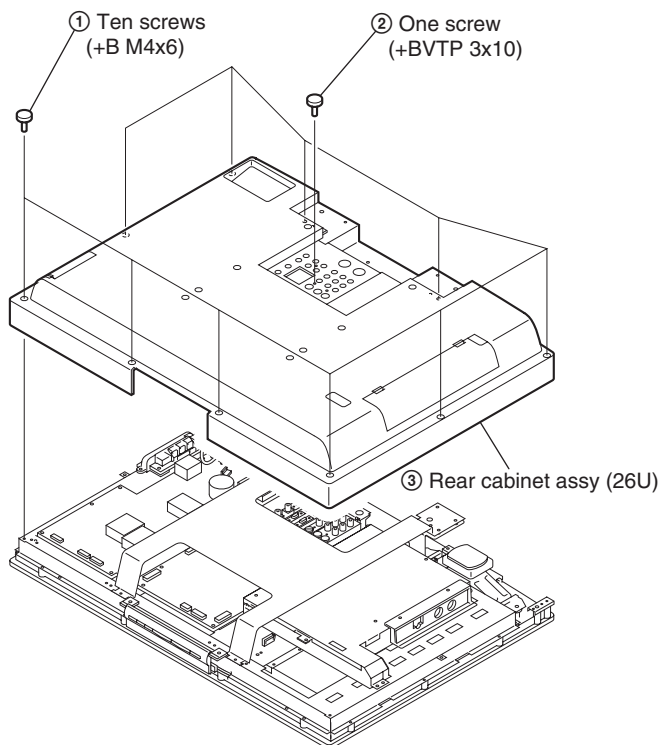


KLV-S26A10/S32A10

2-1-3. H1 BOARD REMOVAL

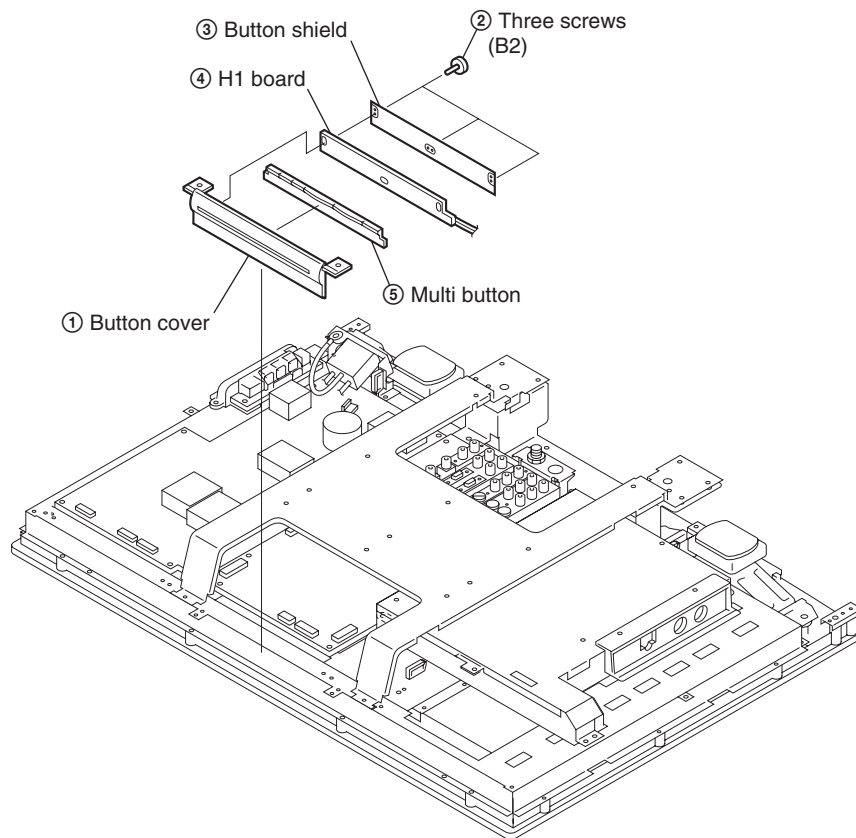


2-1-4. VESA BRACKET ASSY REMOVAL

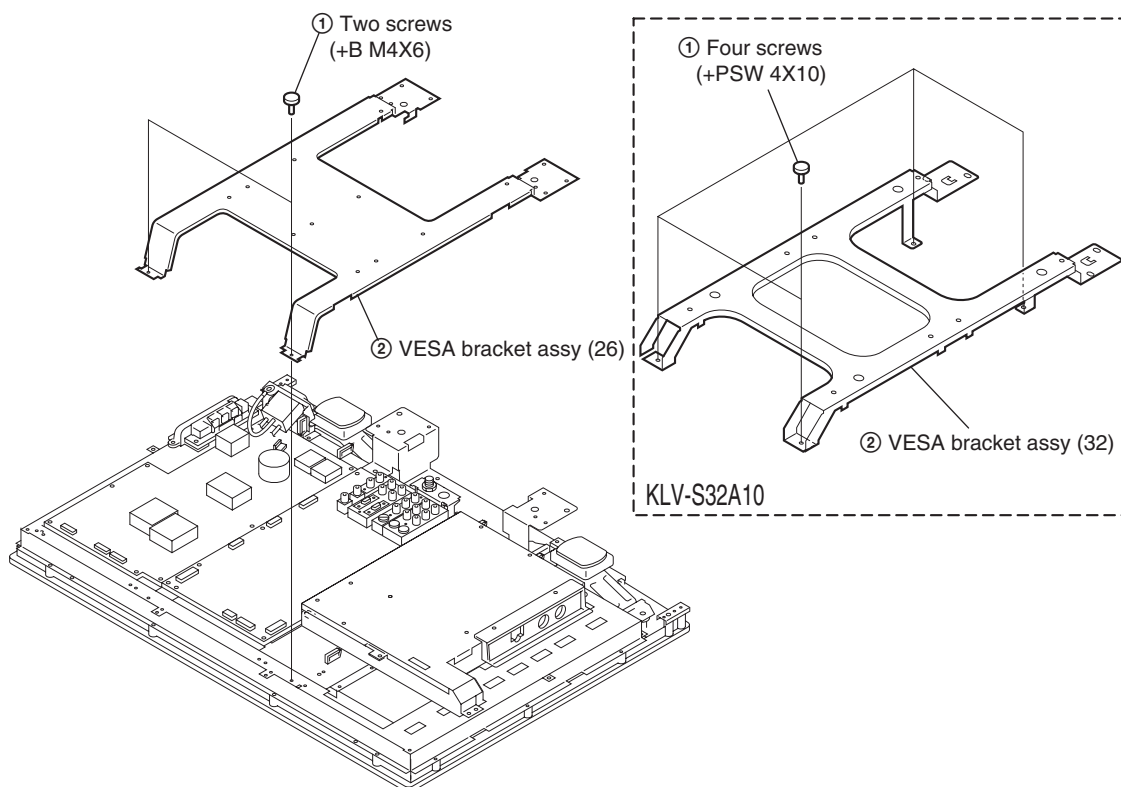


KLV-S26A10/S32A10

2-1-5. SIDE BRACKET ASSY AND S1 TOP SHIELD REMOVAL

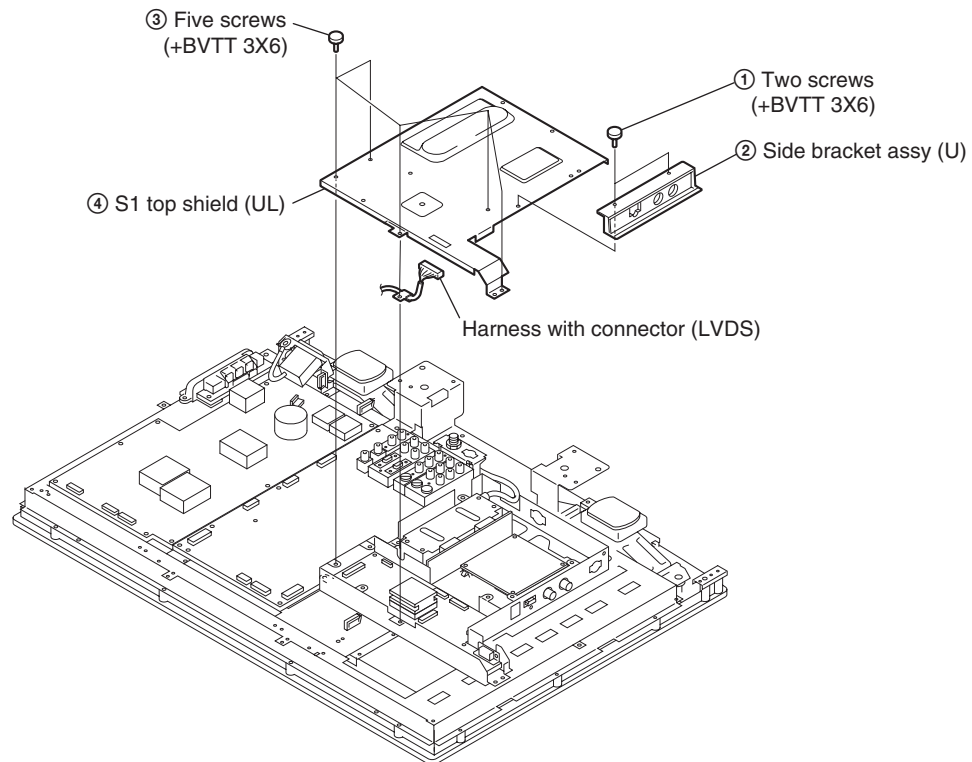


2-1-6. G2 AND H2 BOARDS REMOVAL

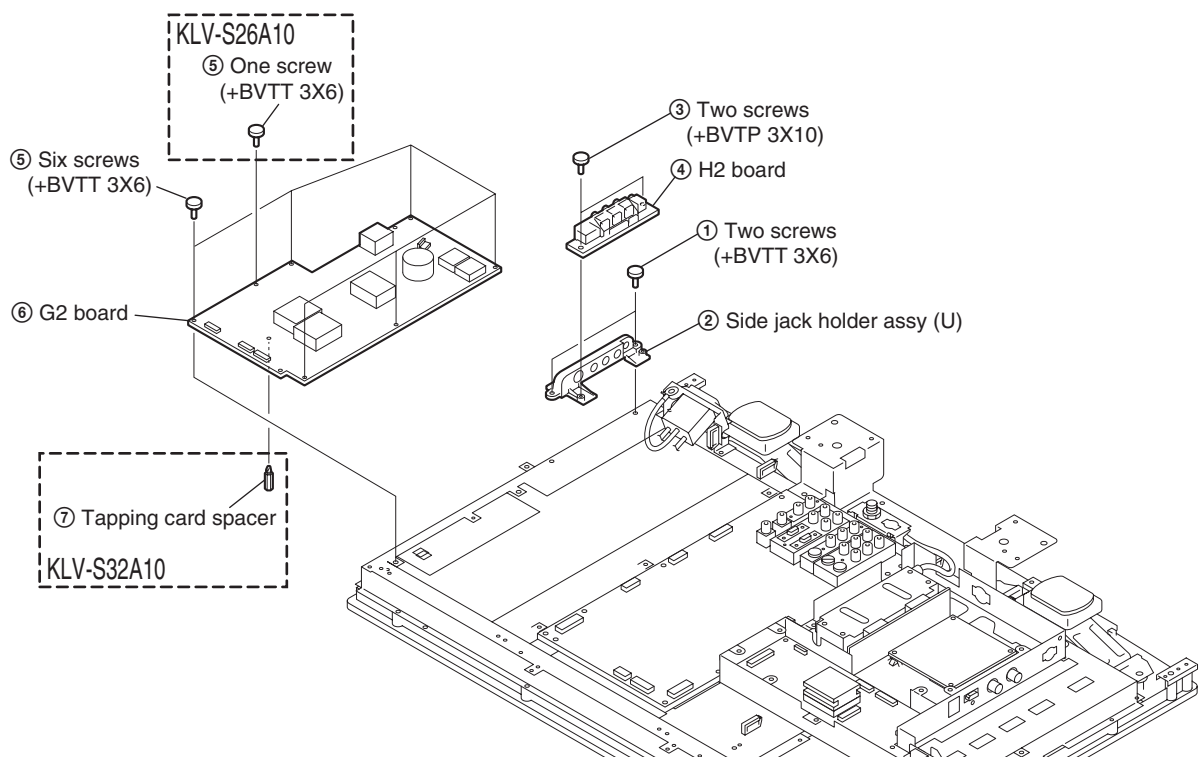


KLV-S26A10/S32A10

2-1-7. A3U BOARD REMOVAL

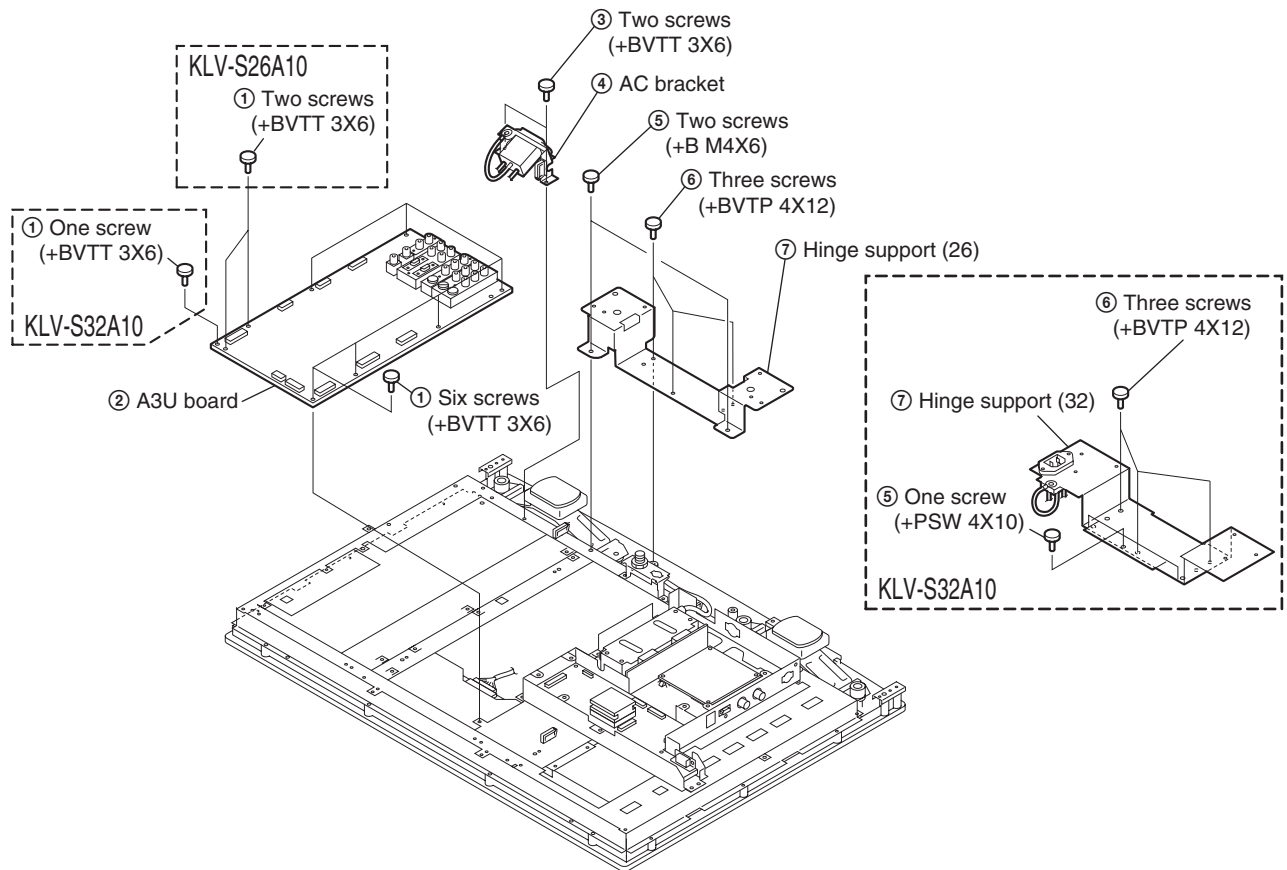


2-1-8. P AND TU BOARDS REMOVAL

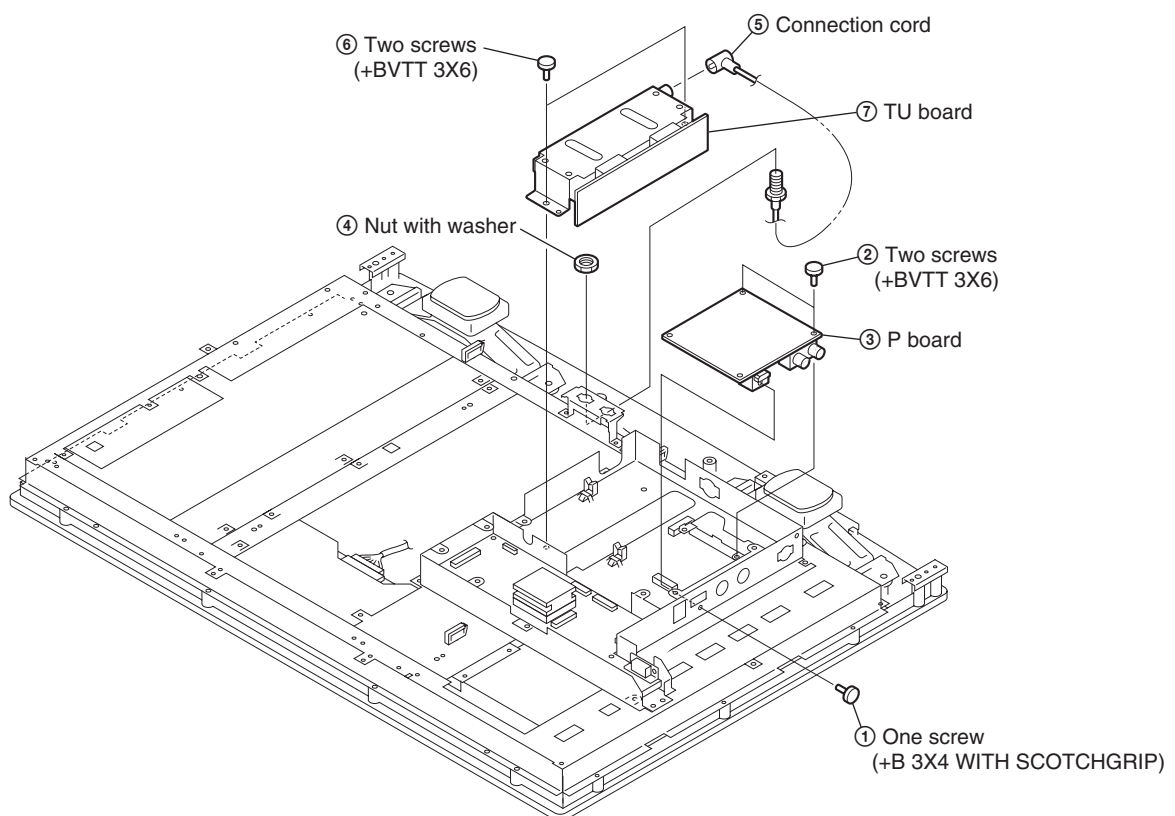


KLVS26A10/S32A10

2-1-9. B BOARD REMOVAL

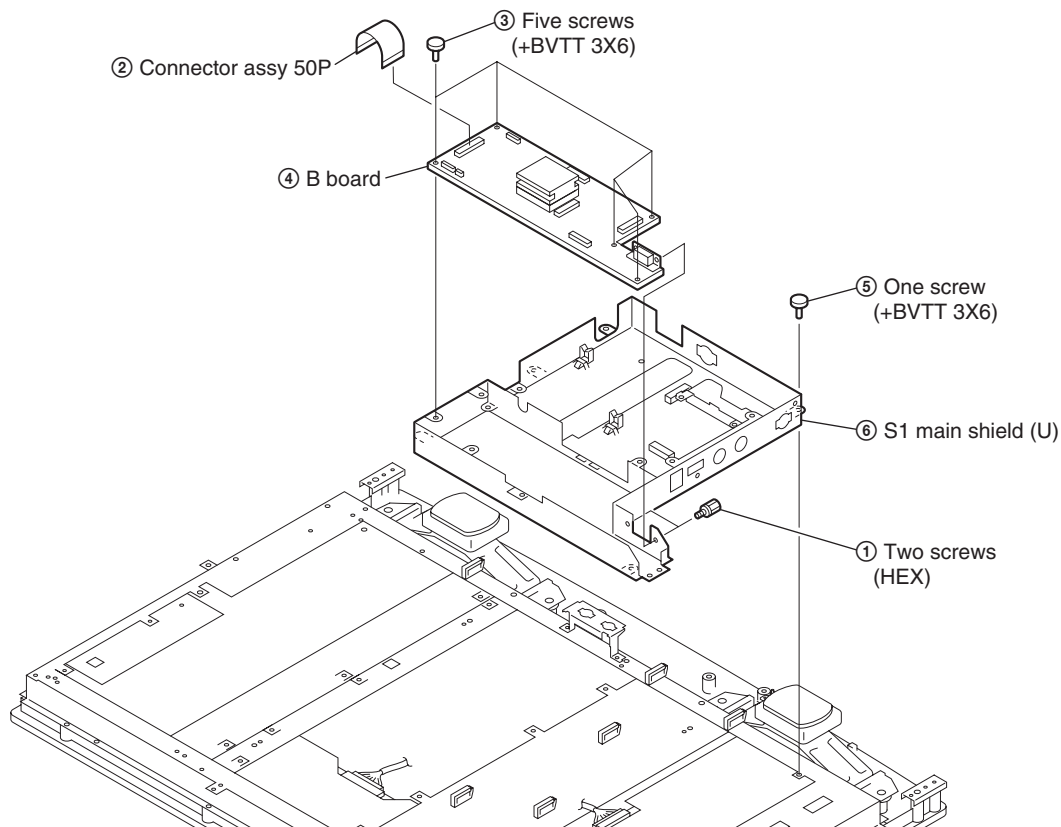


2-1-10. H3 BOARD AND SPEAKER REMOVAL

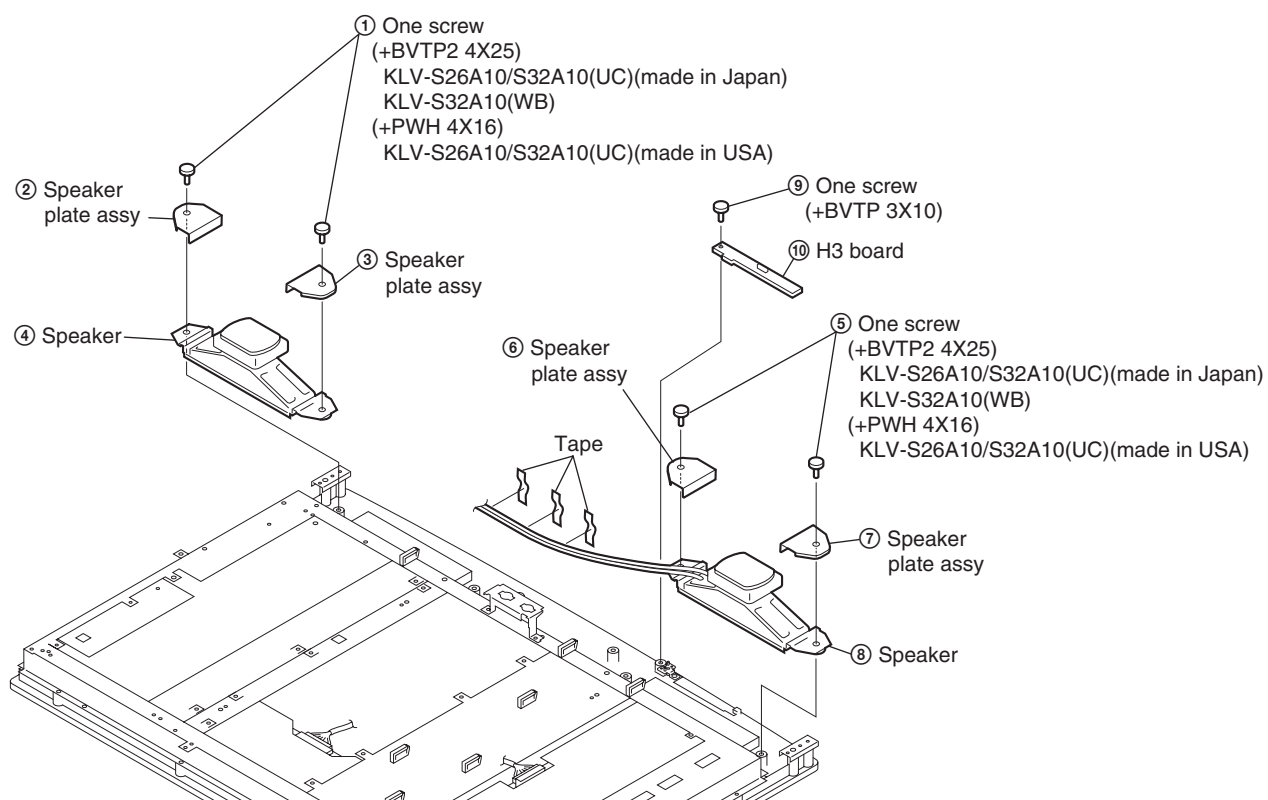


KLV-S26A10/S32A10

2-1-11. LCD PANEL REMOVAL

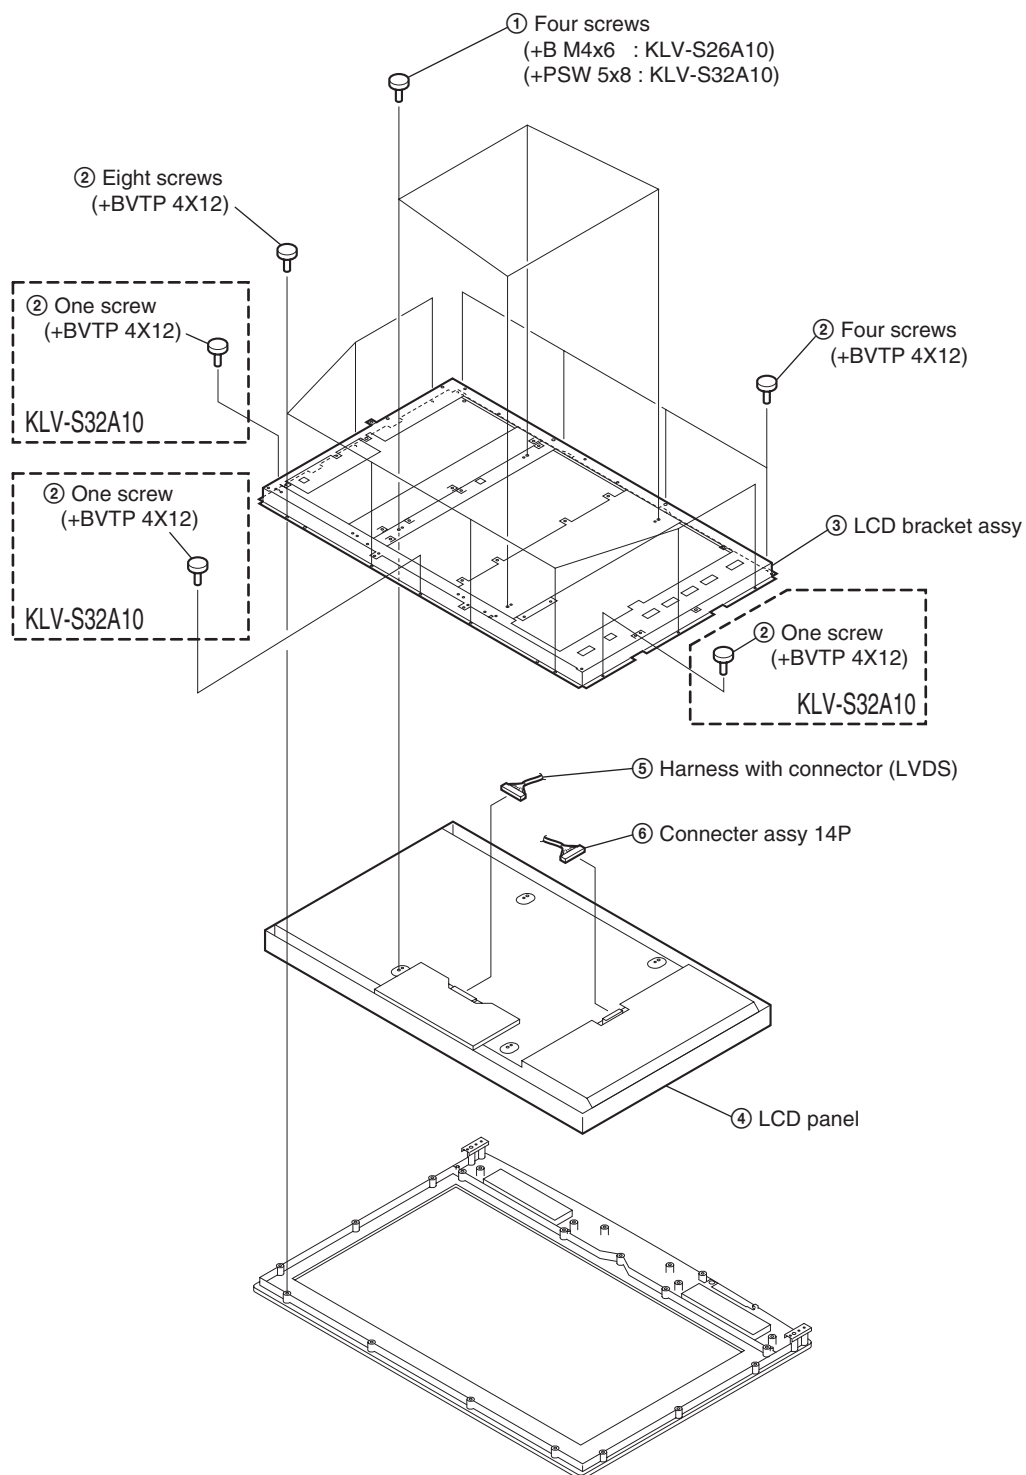


2-2. KLV-S40A10

2-2-1. STAND ASSY REMOVAL

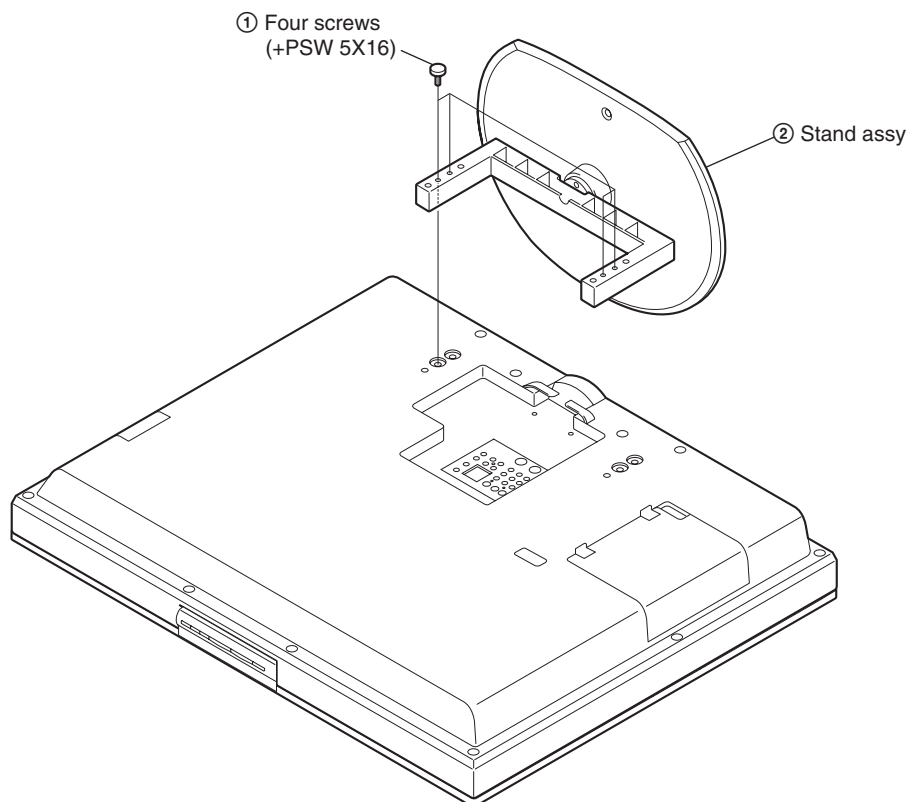


2-2-2. REAR CABINET ASSY REMOVAL

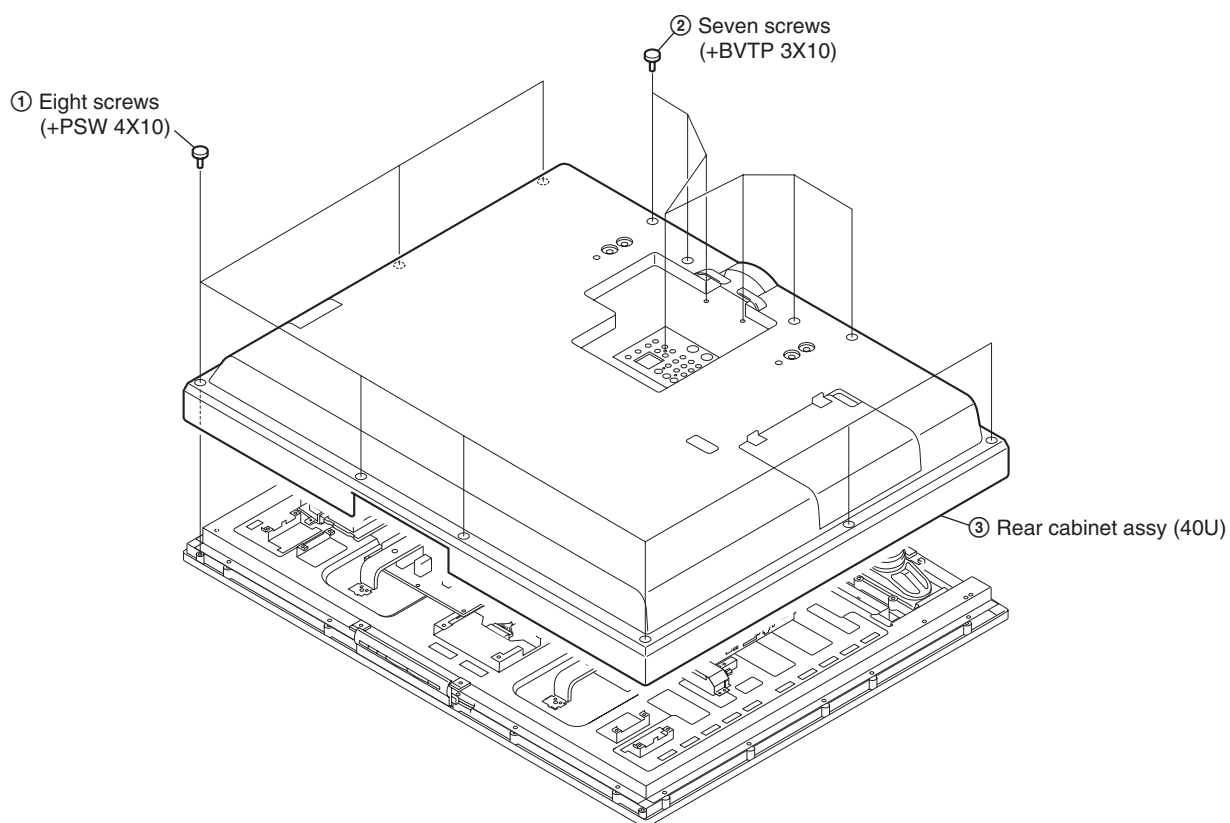


KLV-S40A10

2-2-3. H1 BOARD REMOVAL

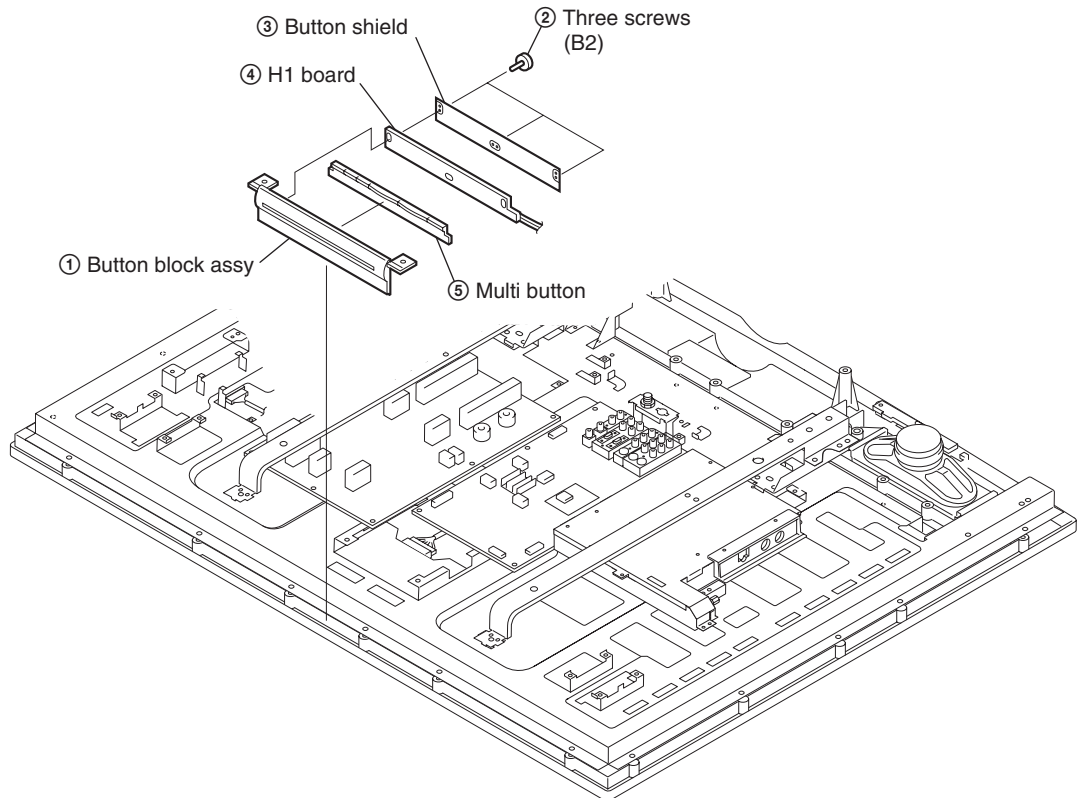


2-2-4. VESA BRACKET ASSY AND G SHIELD ASSY REMOVAL

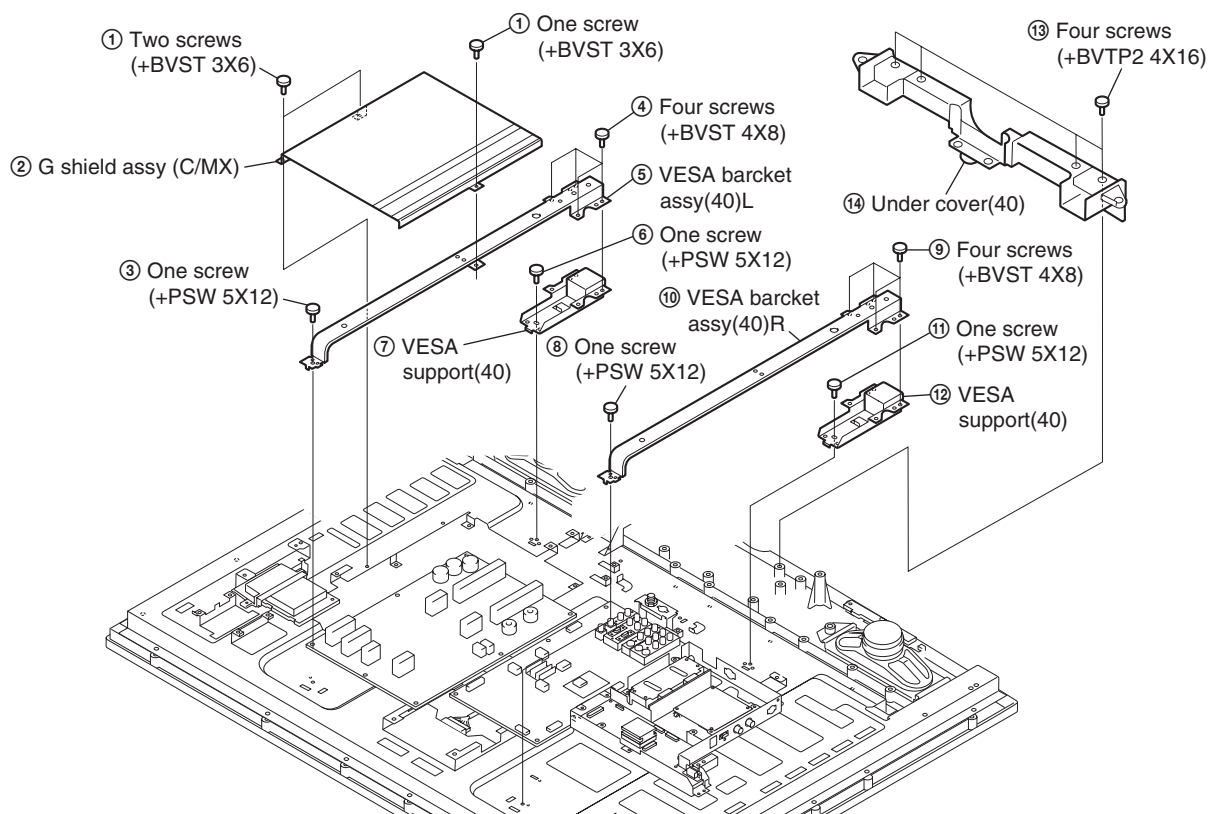


KLV-S40A10

2-2-5. SIDE BRACKET ASSY AND S1 TOP SHIELD REMOVAL

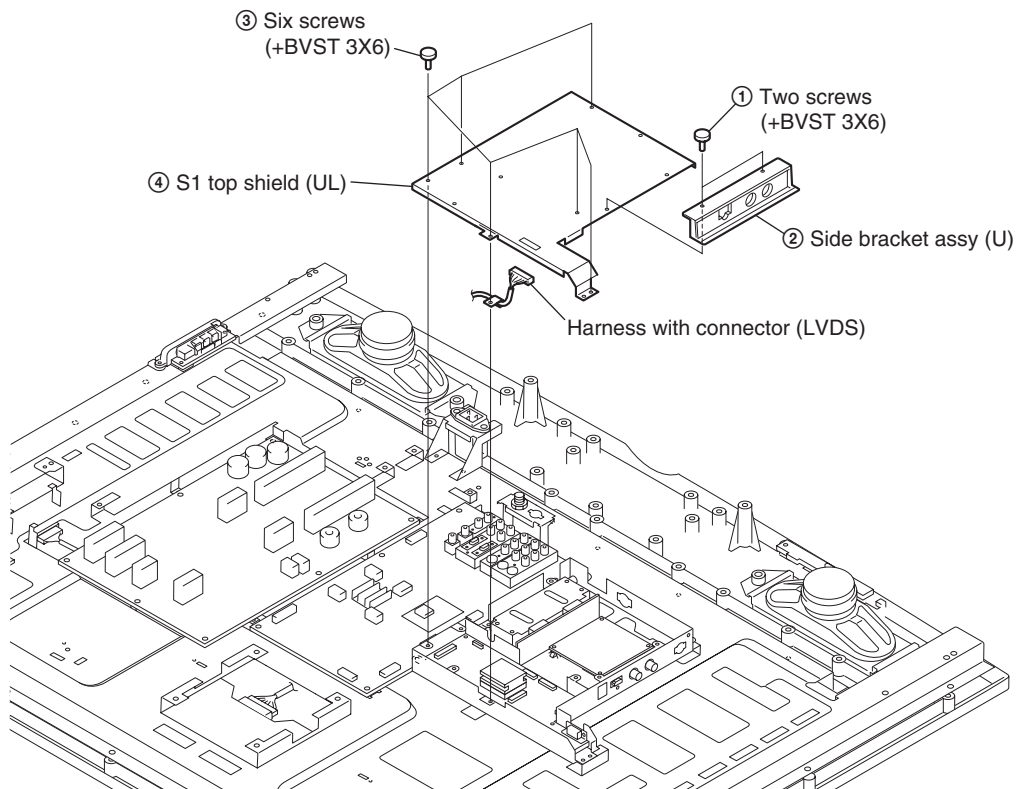


2-2-6. H2 BOARD REMOVAL

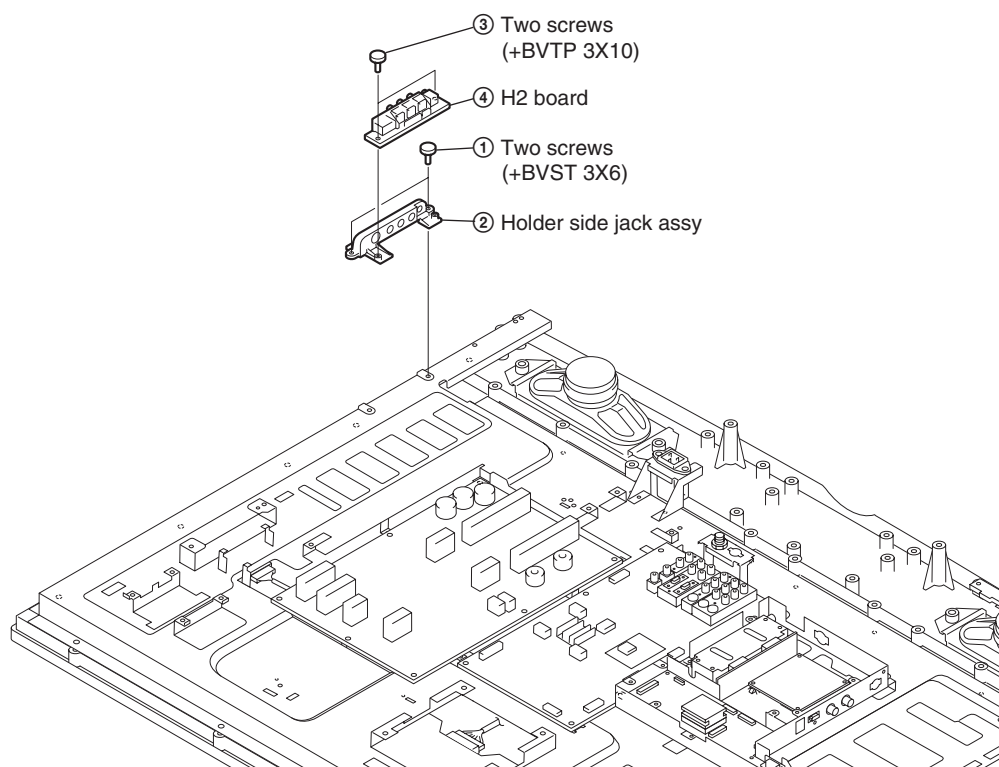


KLV-S40A10

2-2-7. G3 BOARD REMOVAL

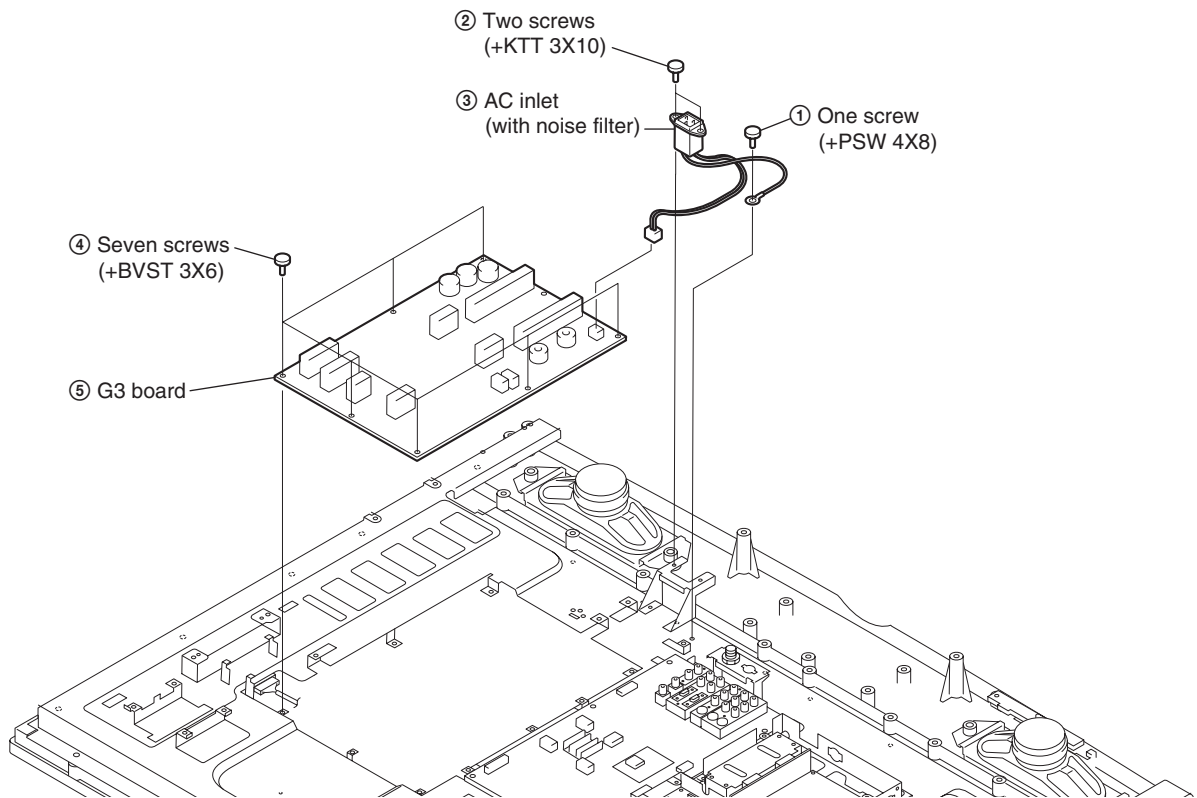


2-2-8. A3U BOARD REMOVAL

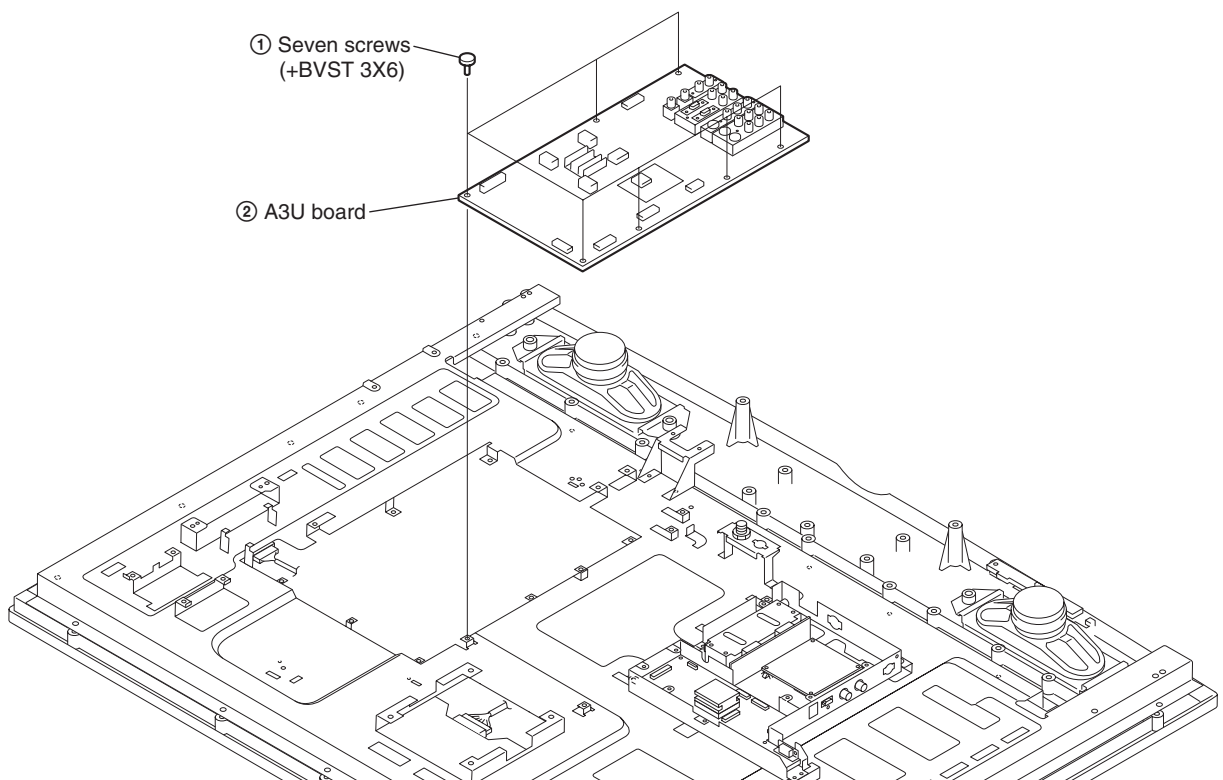


KLV-S40A10

2-2-9. TU BOARD REMOVAL

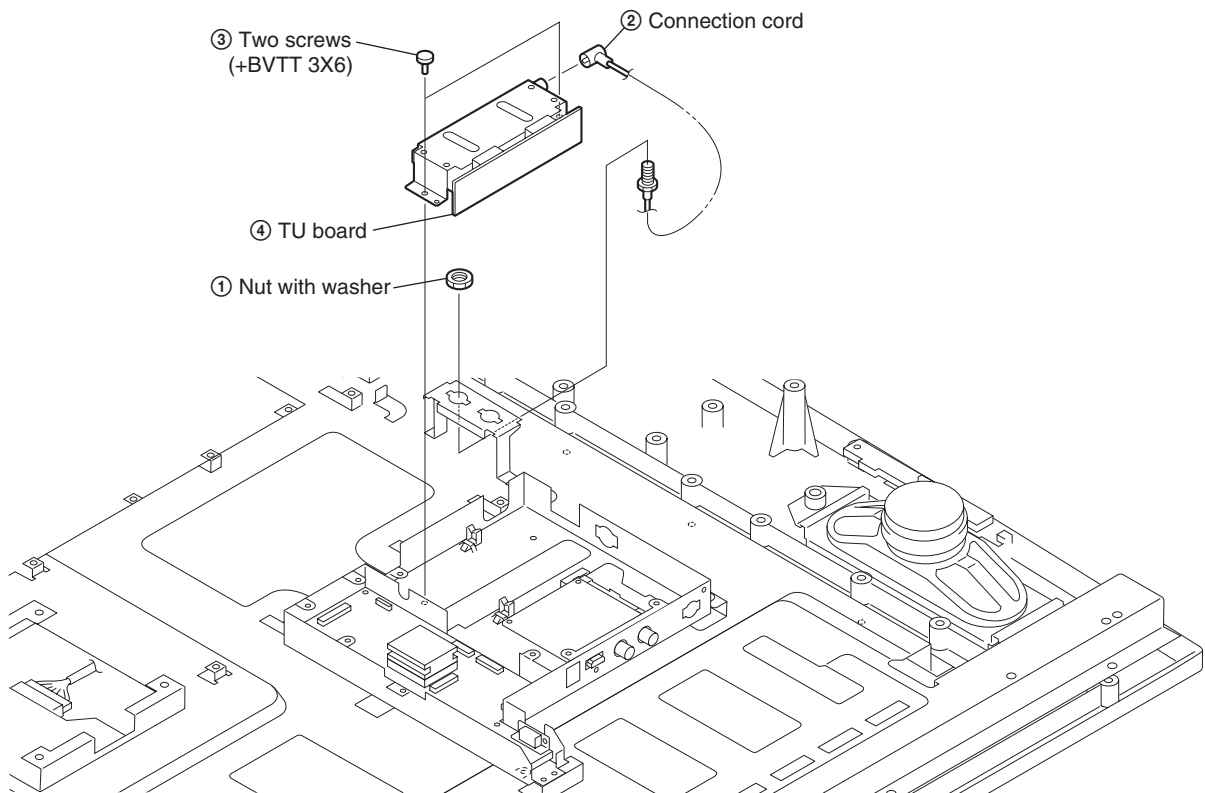


2-2-10. P BOARD REMOVAL

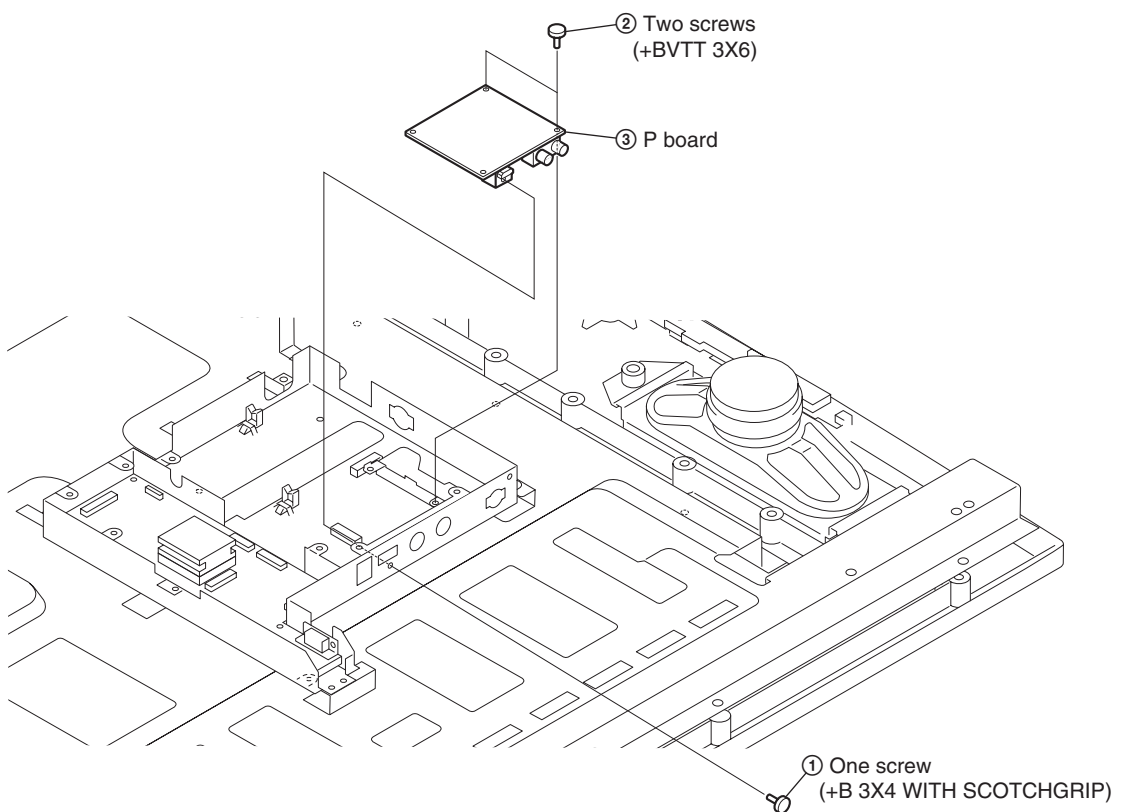


KLV-S40A10

2-2-11. B BOARD REMOVAL

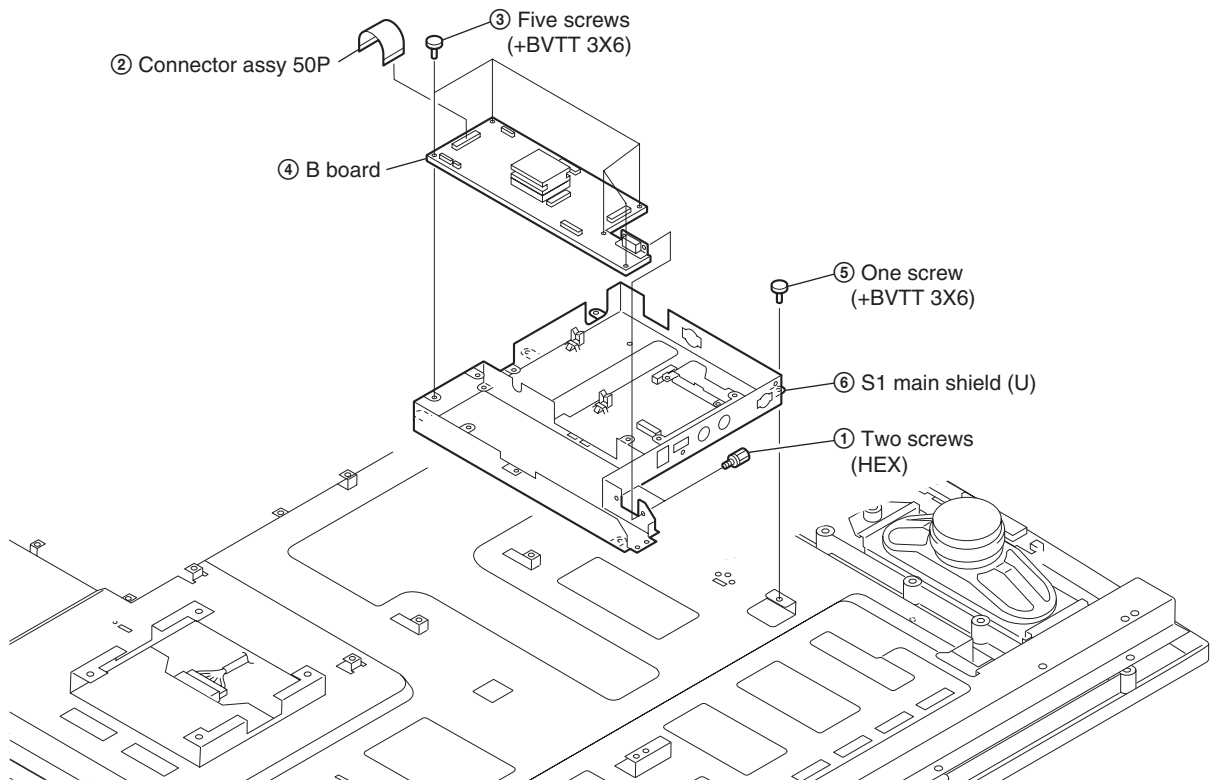


2-2-12. H3 BOARD AND SPEAKER REMOVAL

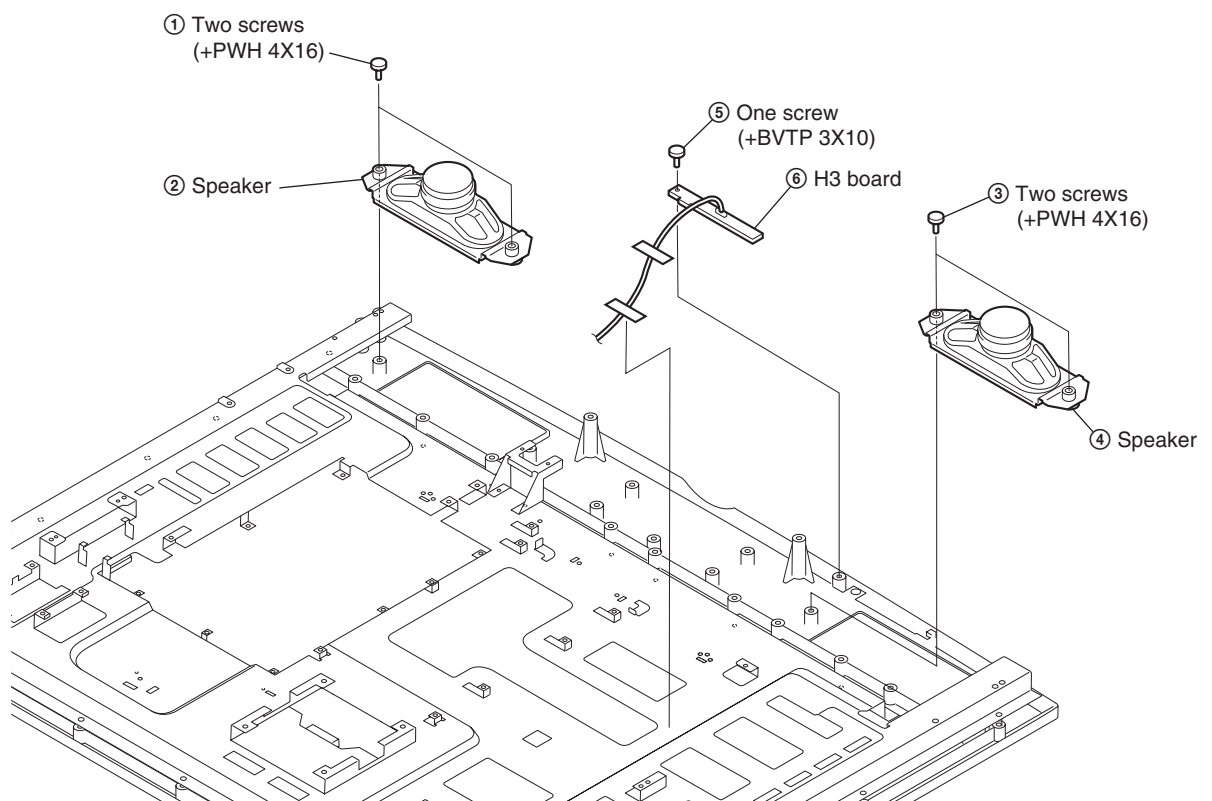

KLV-S40A10

2-2-13. LCD PANEL REMOVAL

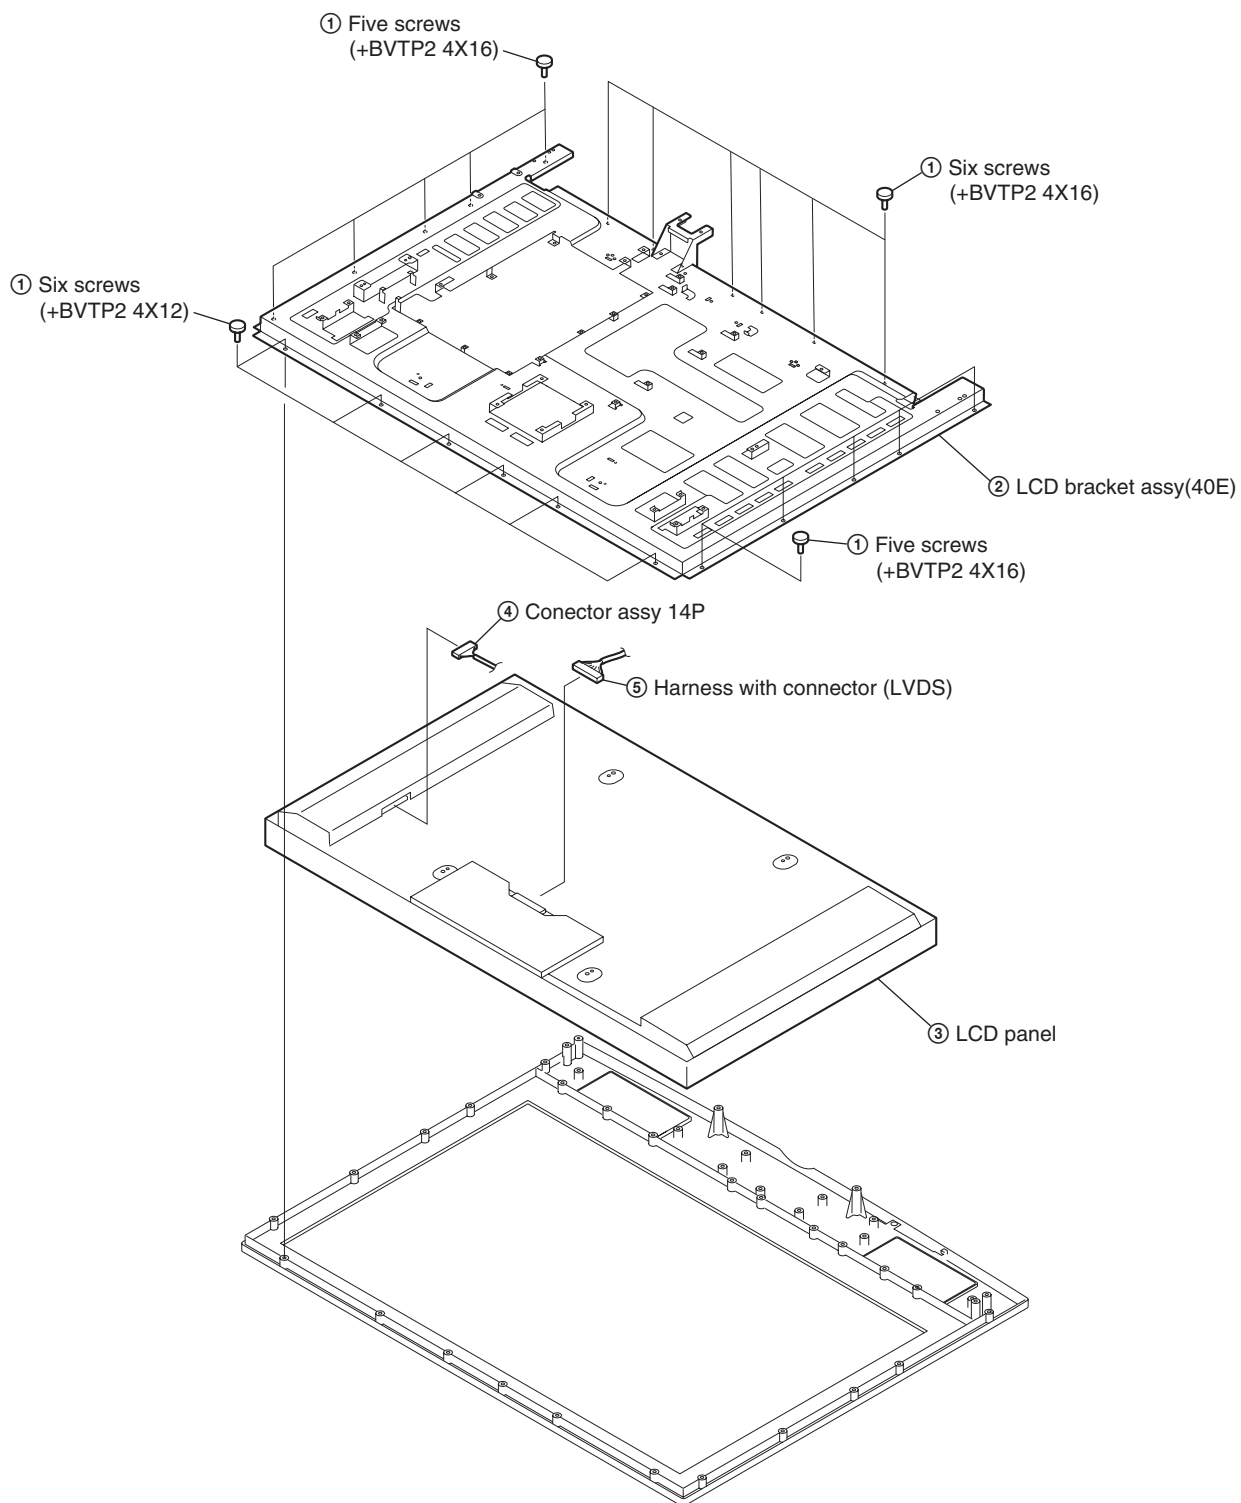

SECTION 3

SERVICE MODE

3-1. DISPLAYING SERVICE MENU

- (1) Turn ON the power of the TV set, and drive it into the standby mode by the remote control.
- (2) Press the buttons on the remote control as follows.


| | | |
|---------------------|-----|--|
| Analog service menu | WAX | DISPLAY → TEN KEY “5” → VOL “+” → TV POWER |
|---------------------|-----|--|


3-2. ADJUSTMENT USING THE SERVICE MENU

Set adjustment values using the “/” keys and the “+” key.


SECTION 4
DIAGRAMS

4-1. BLOCK DIAGRAMS
(1) A3U (1/2), TU and H2 Boards

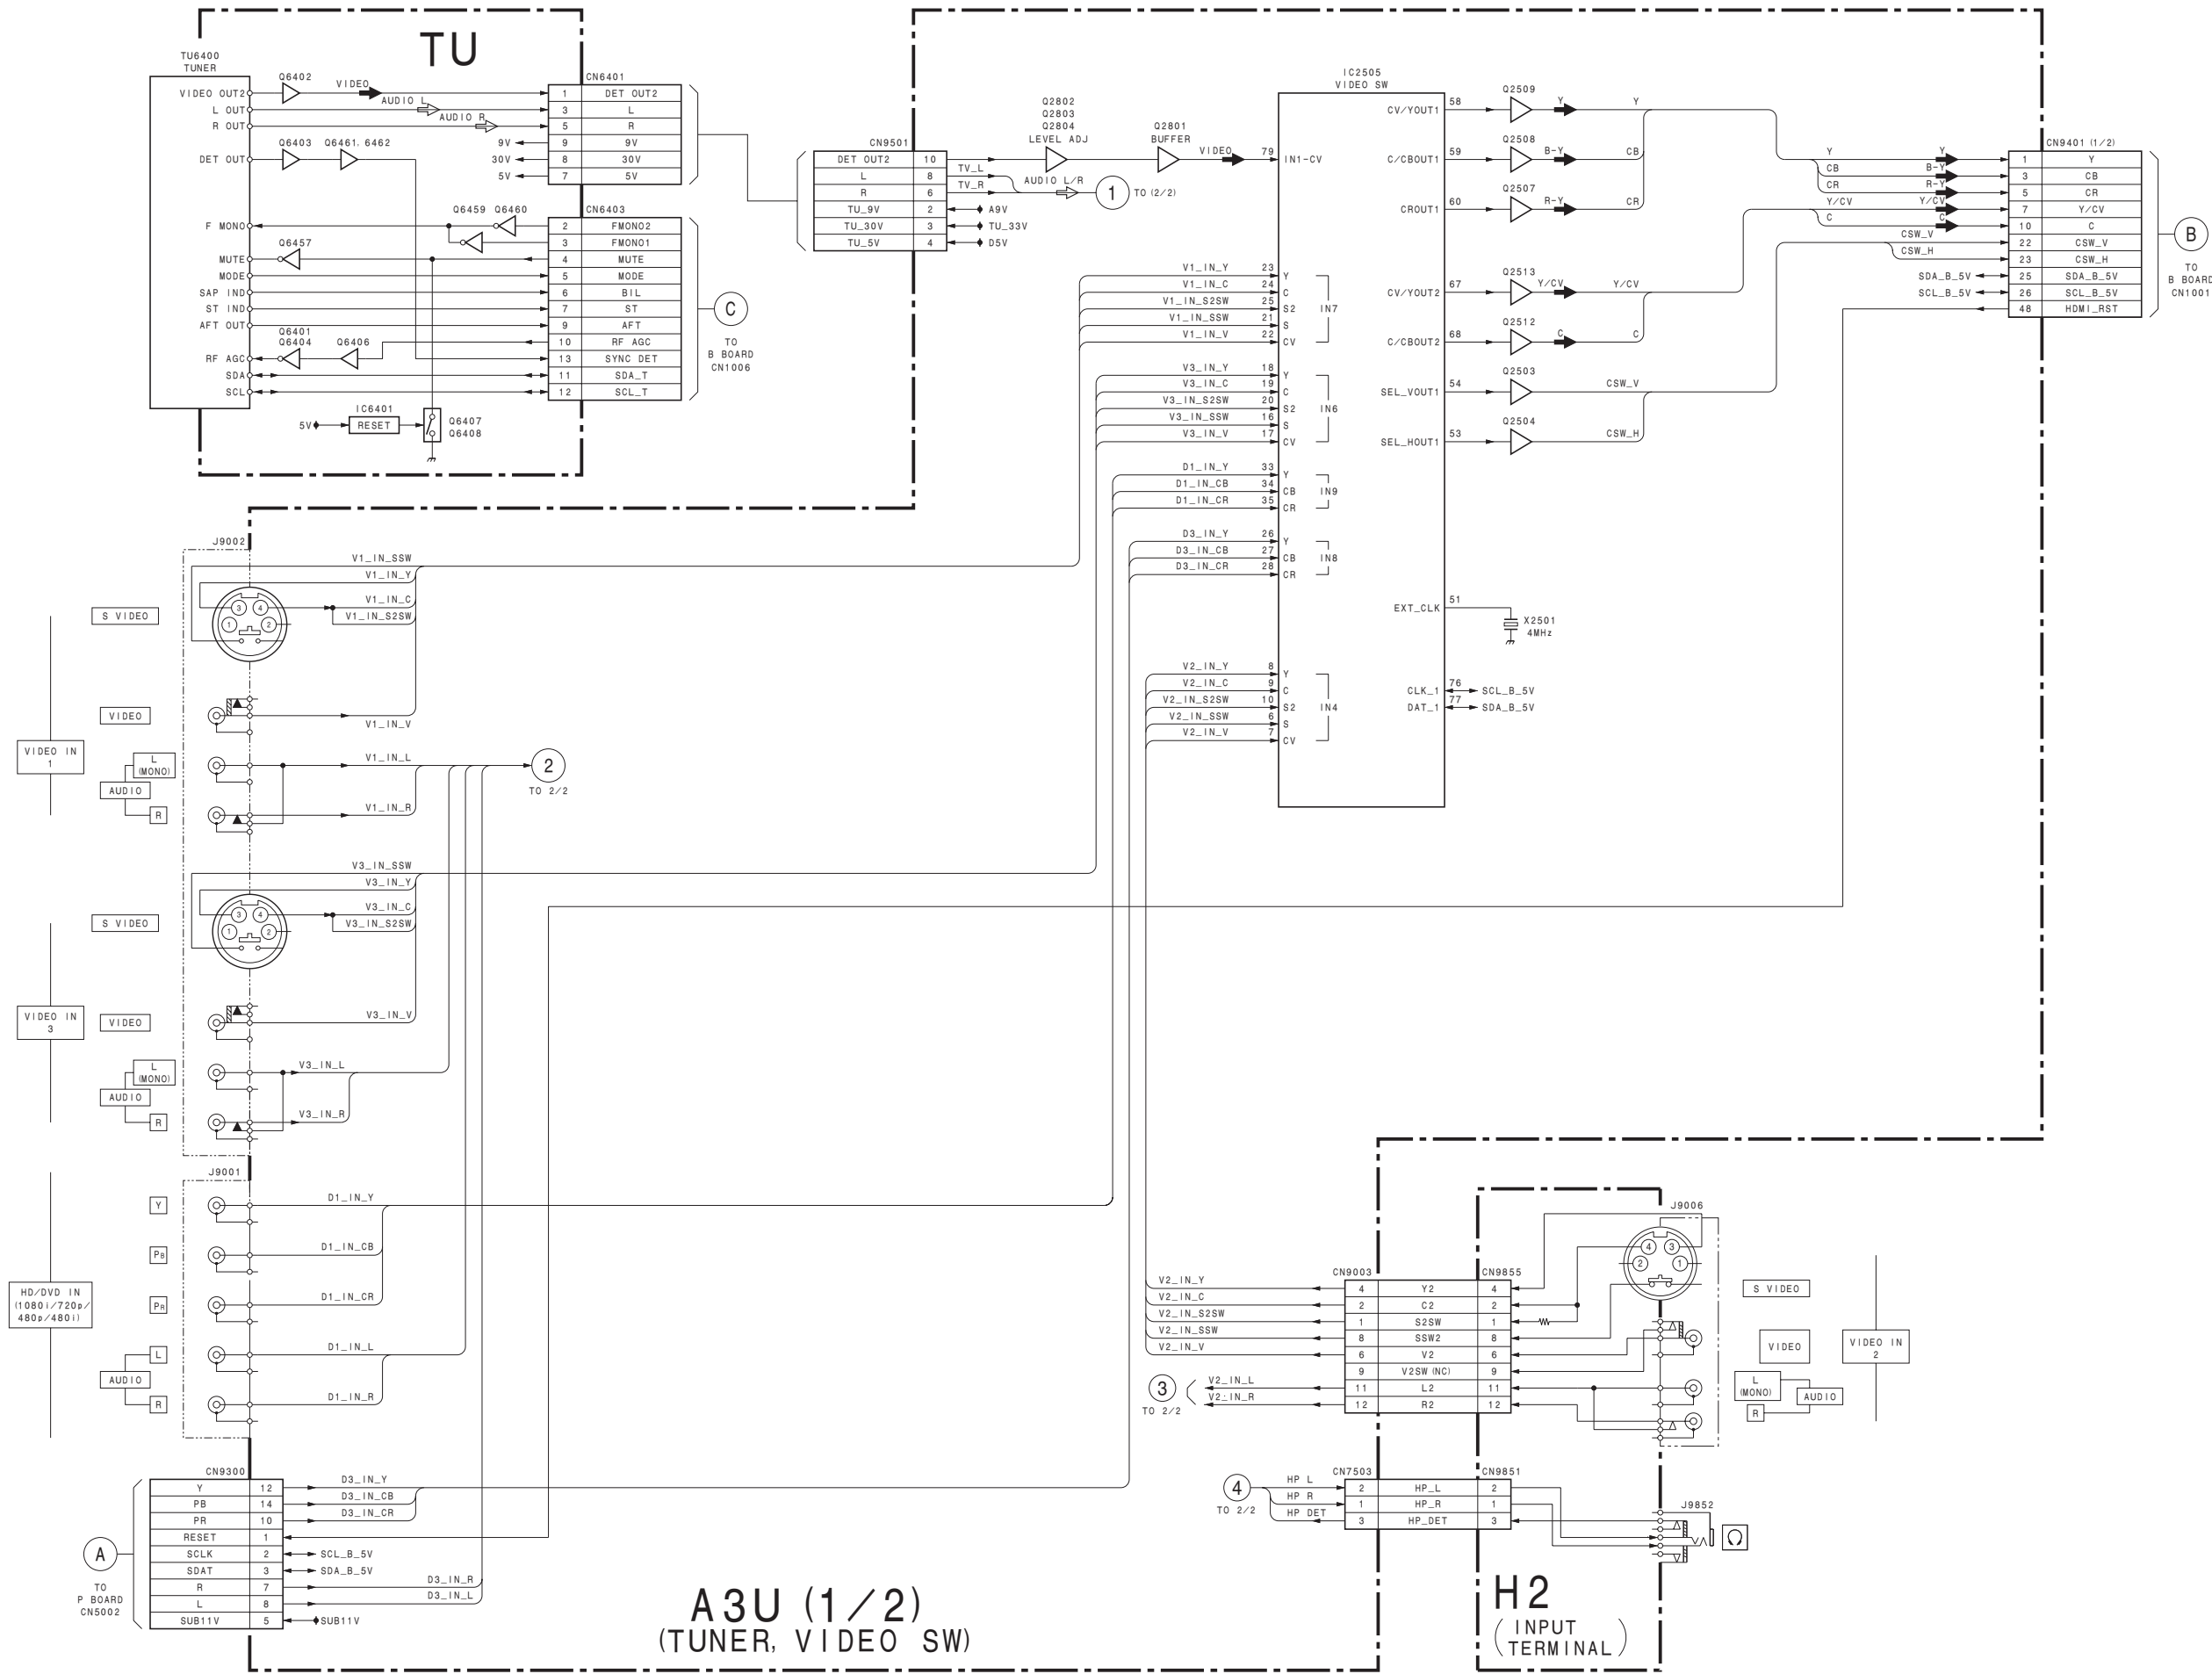


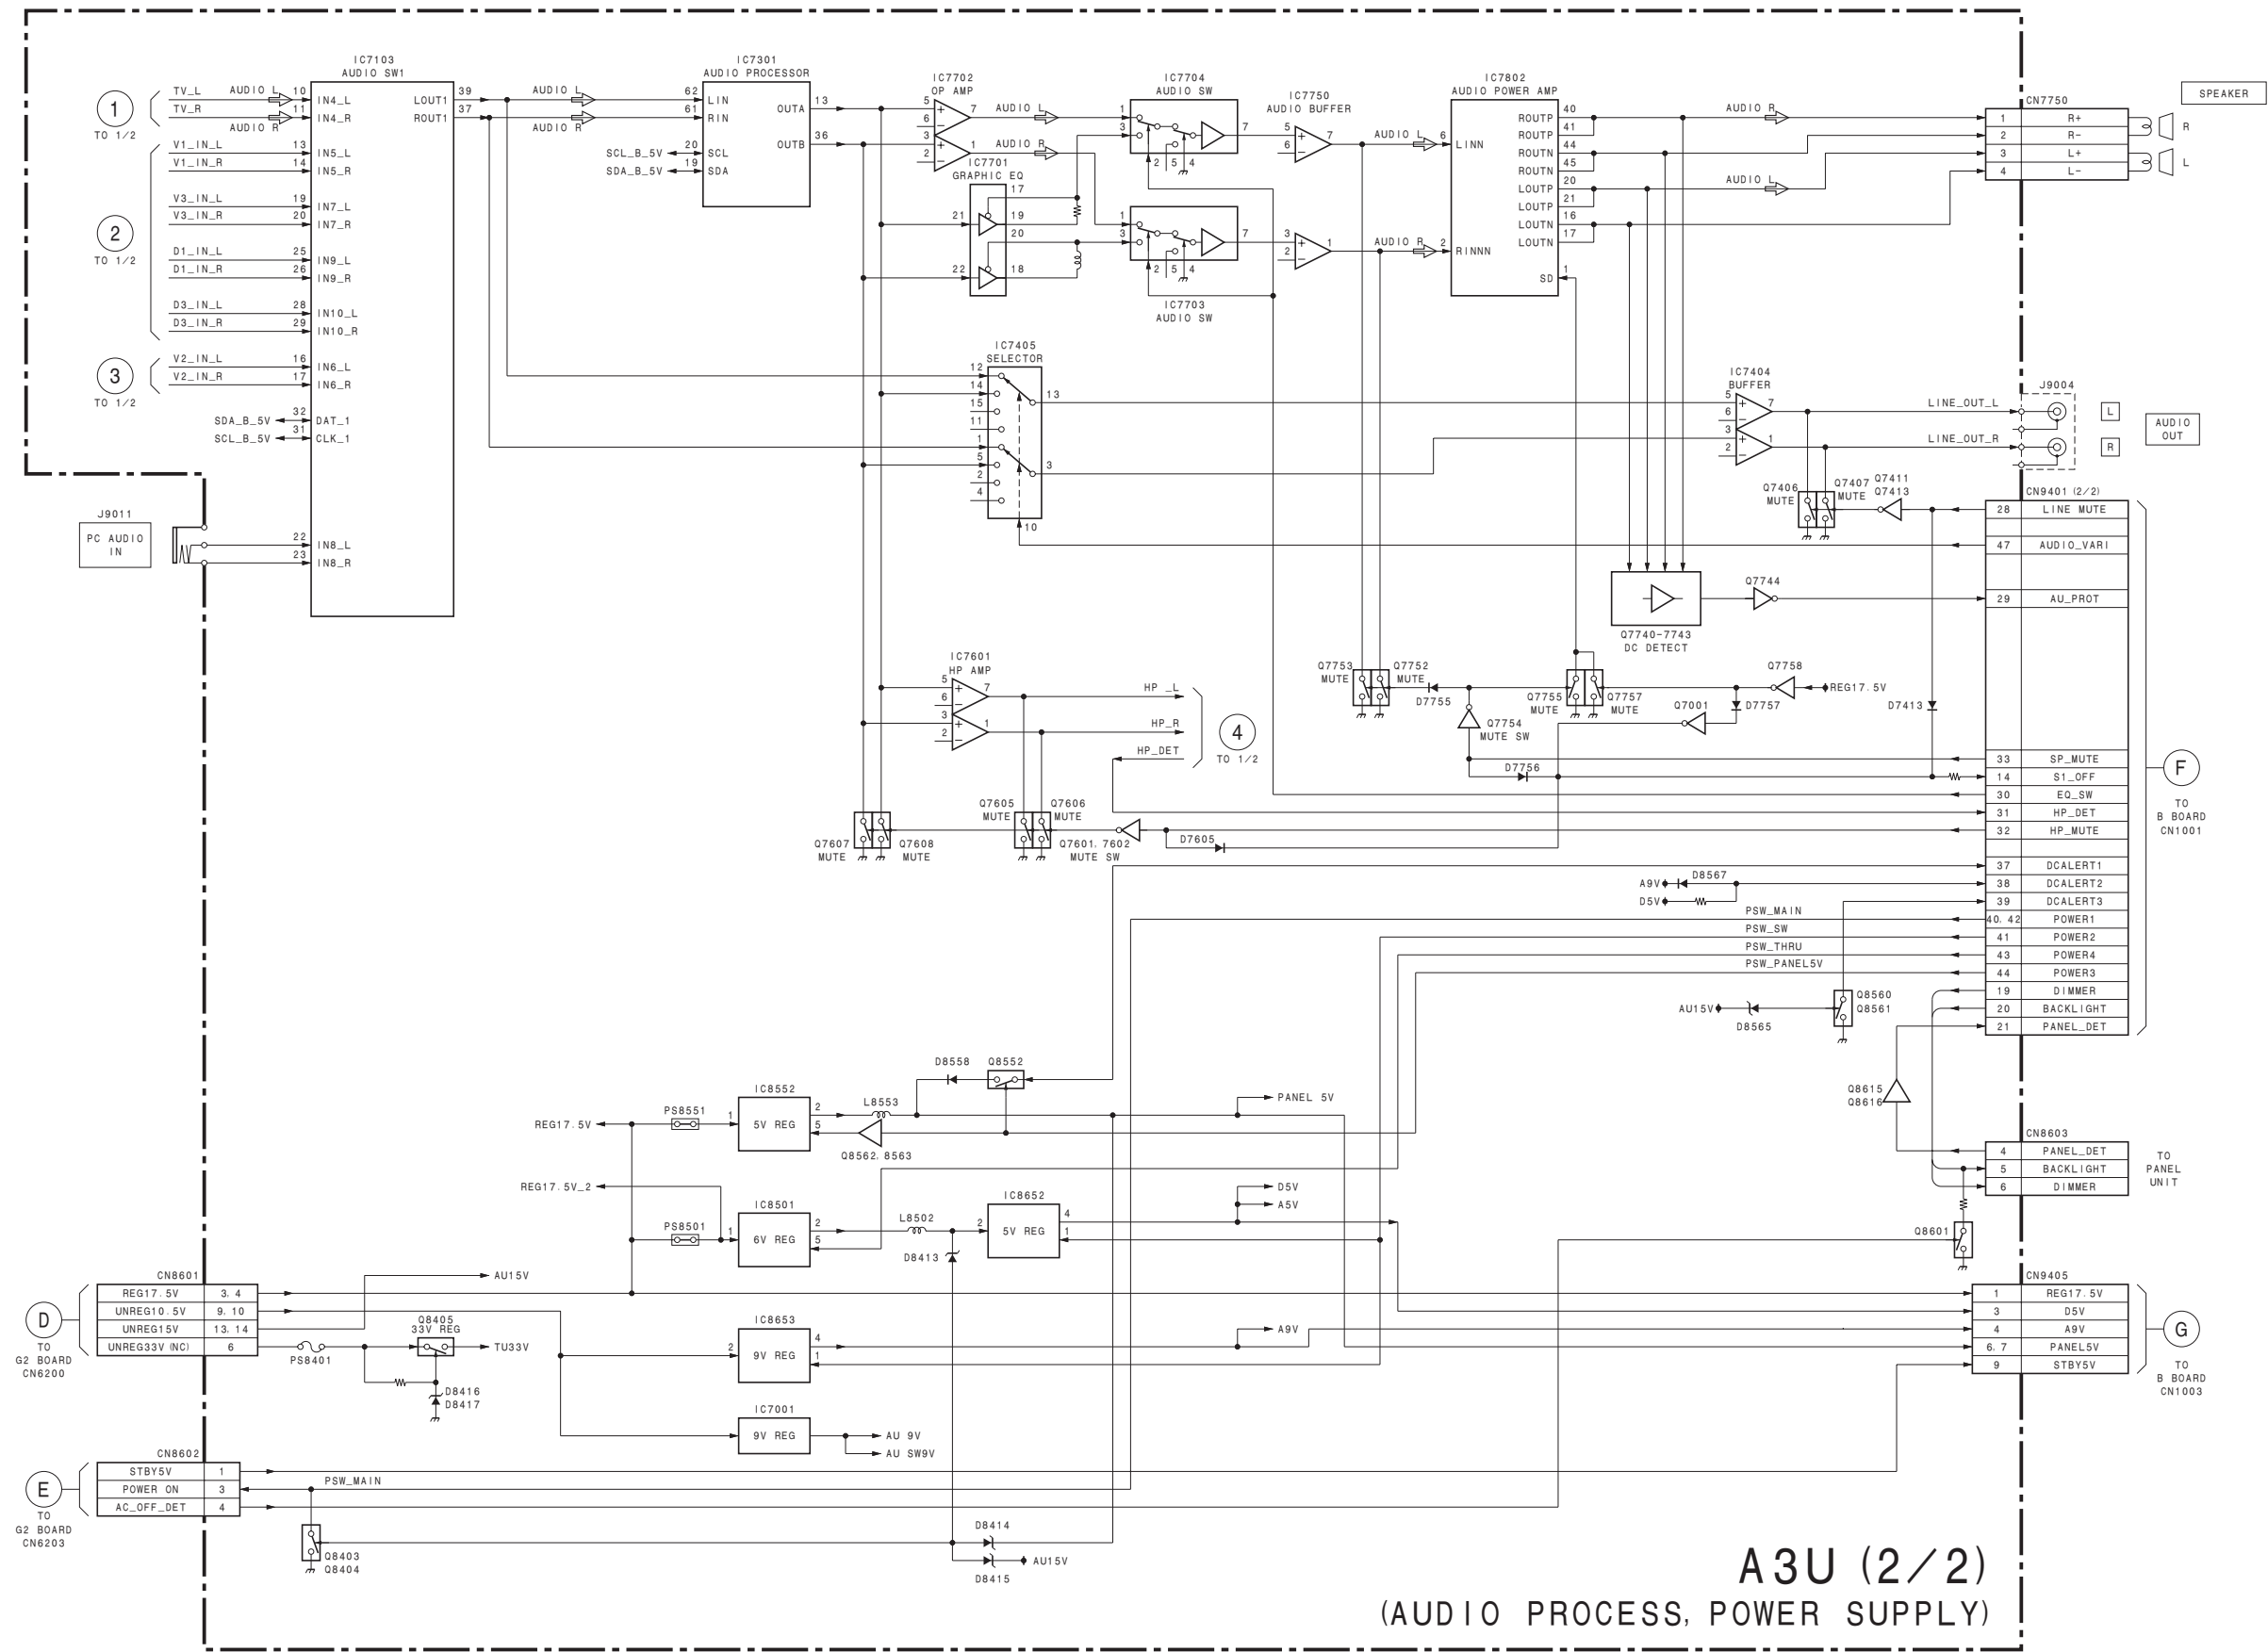



(3) B, H1 and H3 Boards

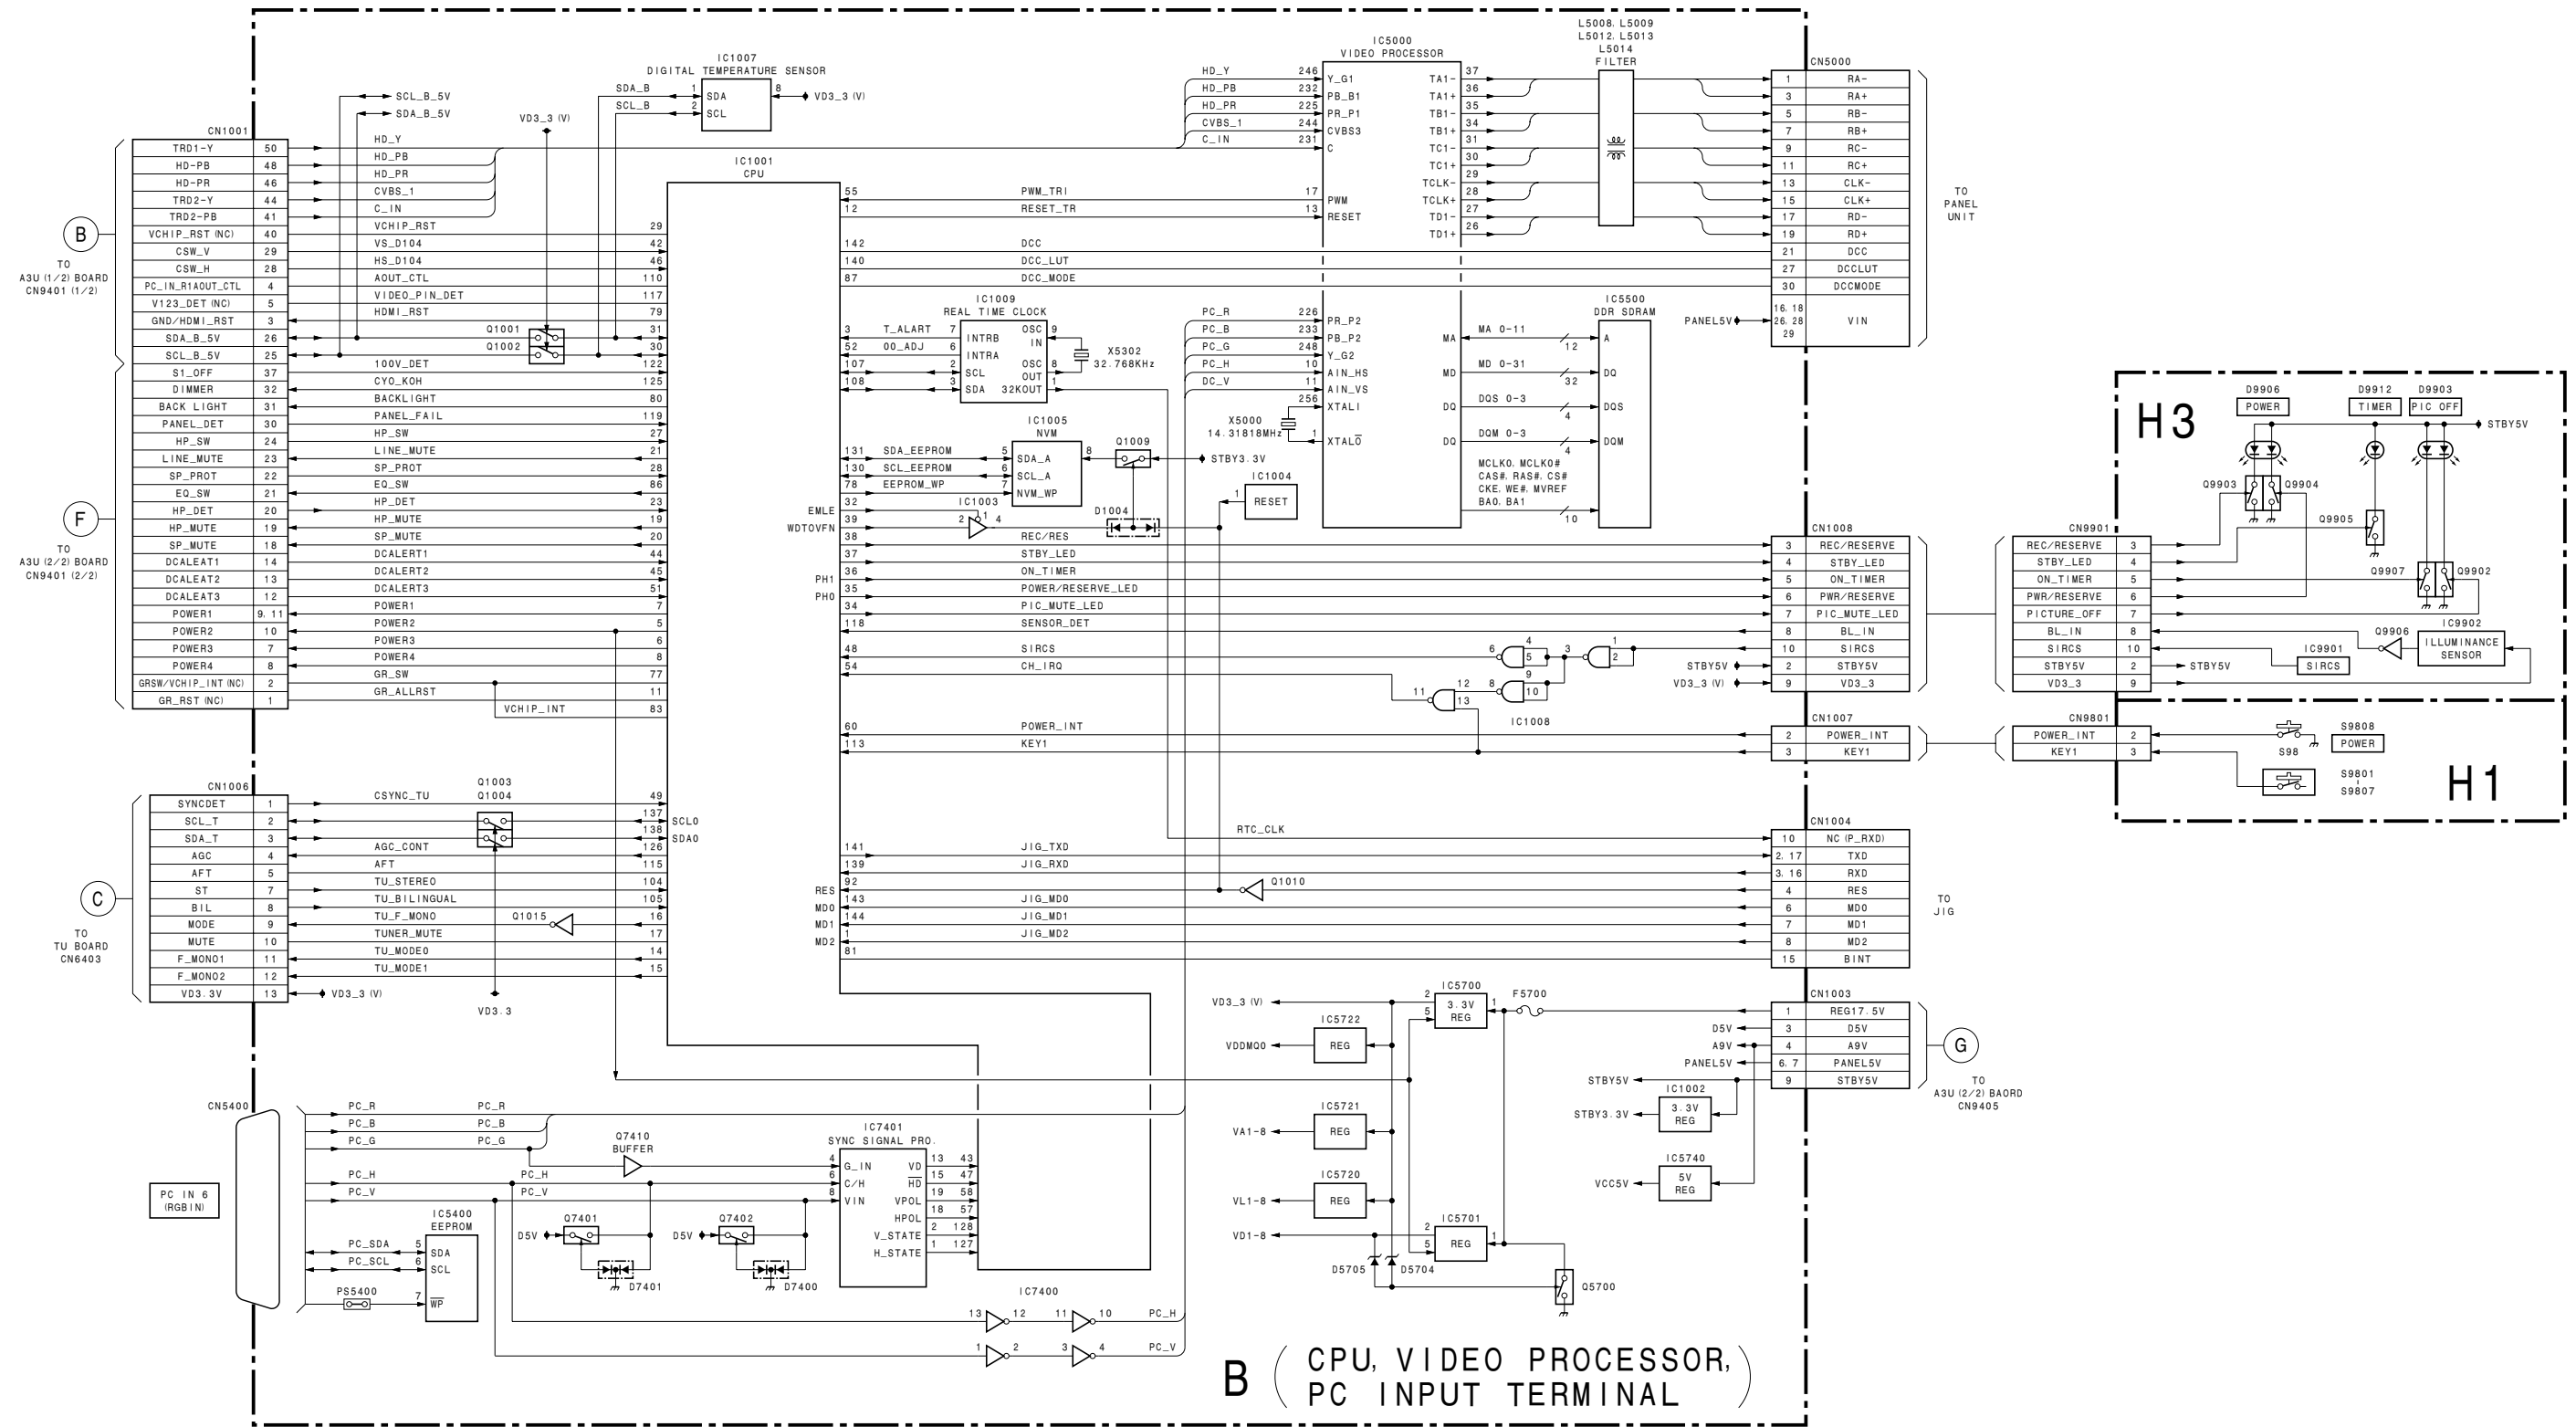


(4) G2 Board (KLV-S26/S32A10 ONLY)

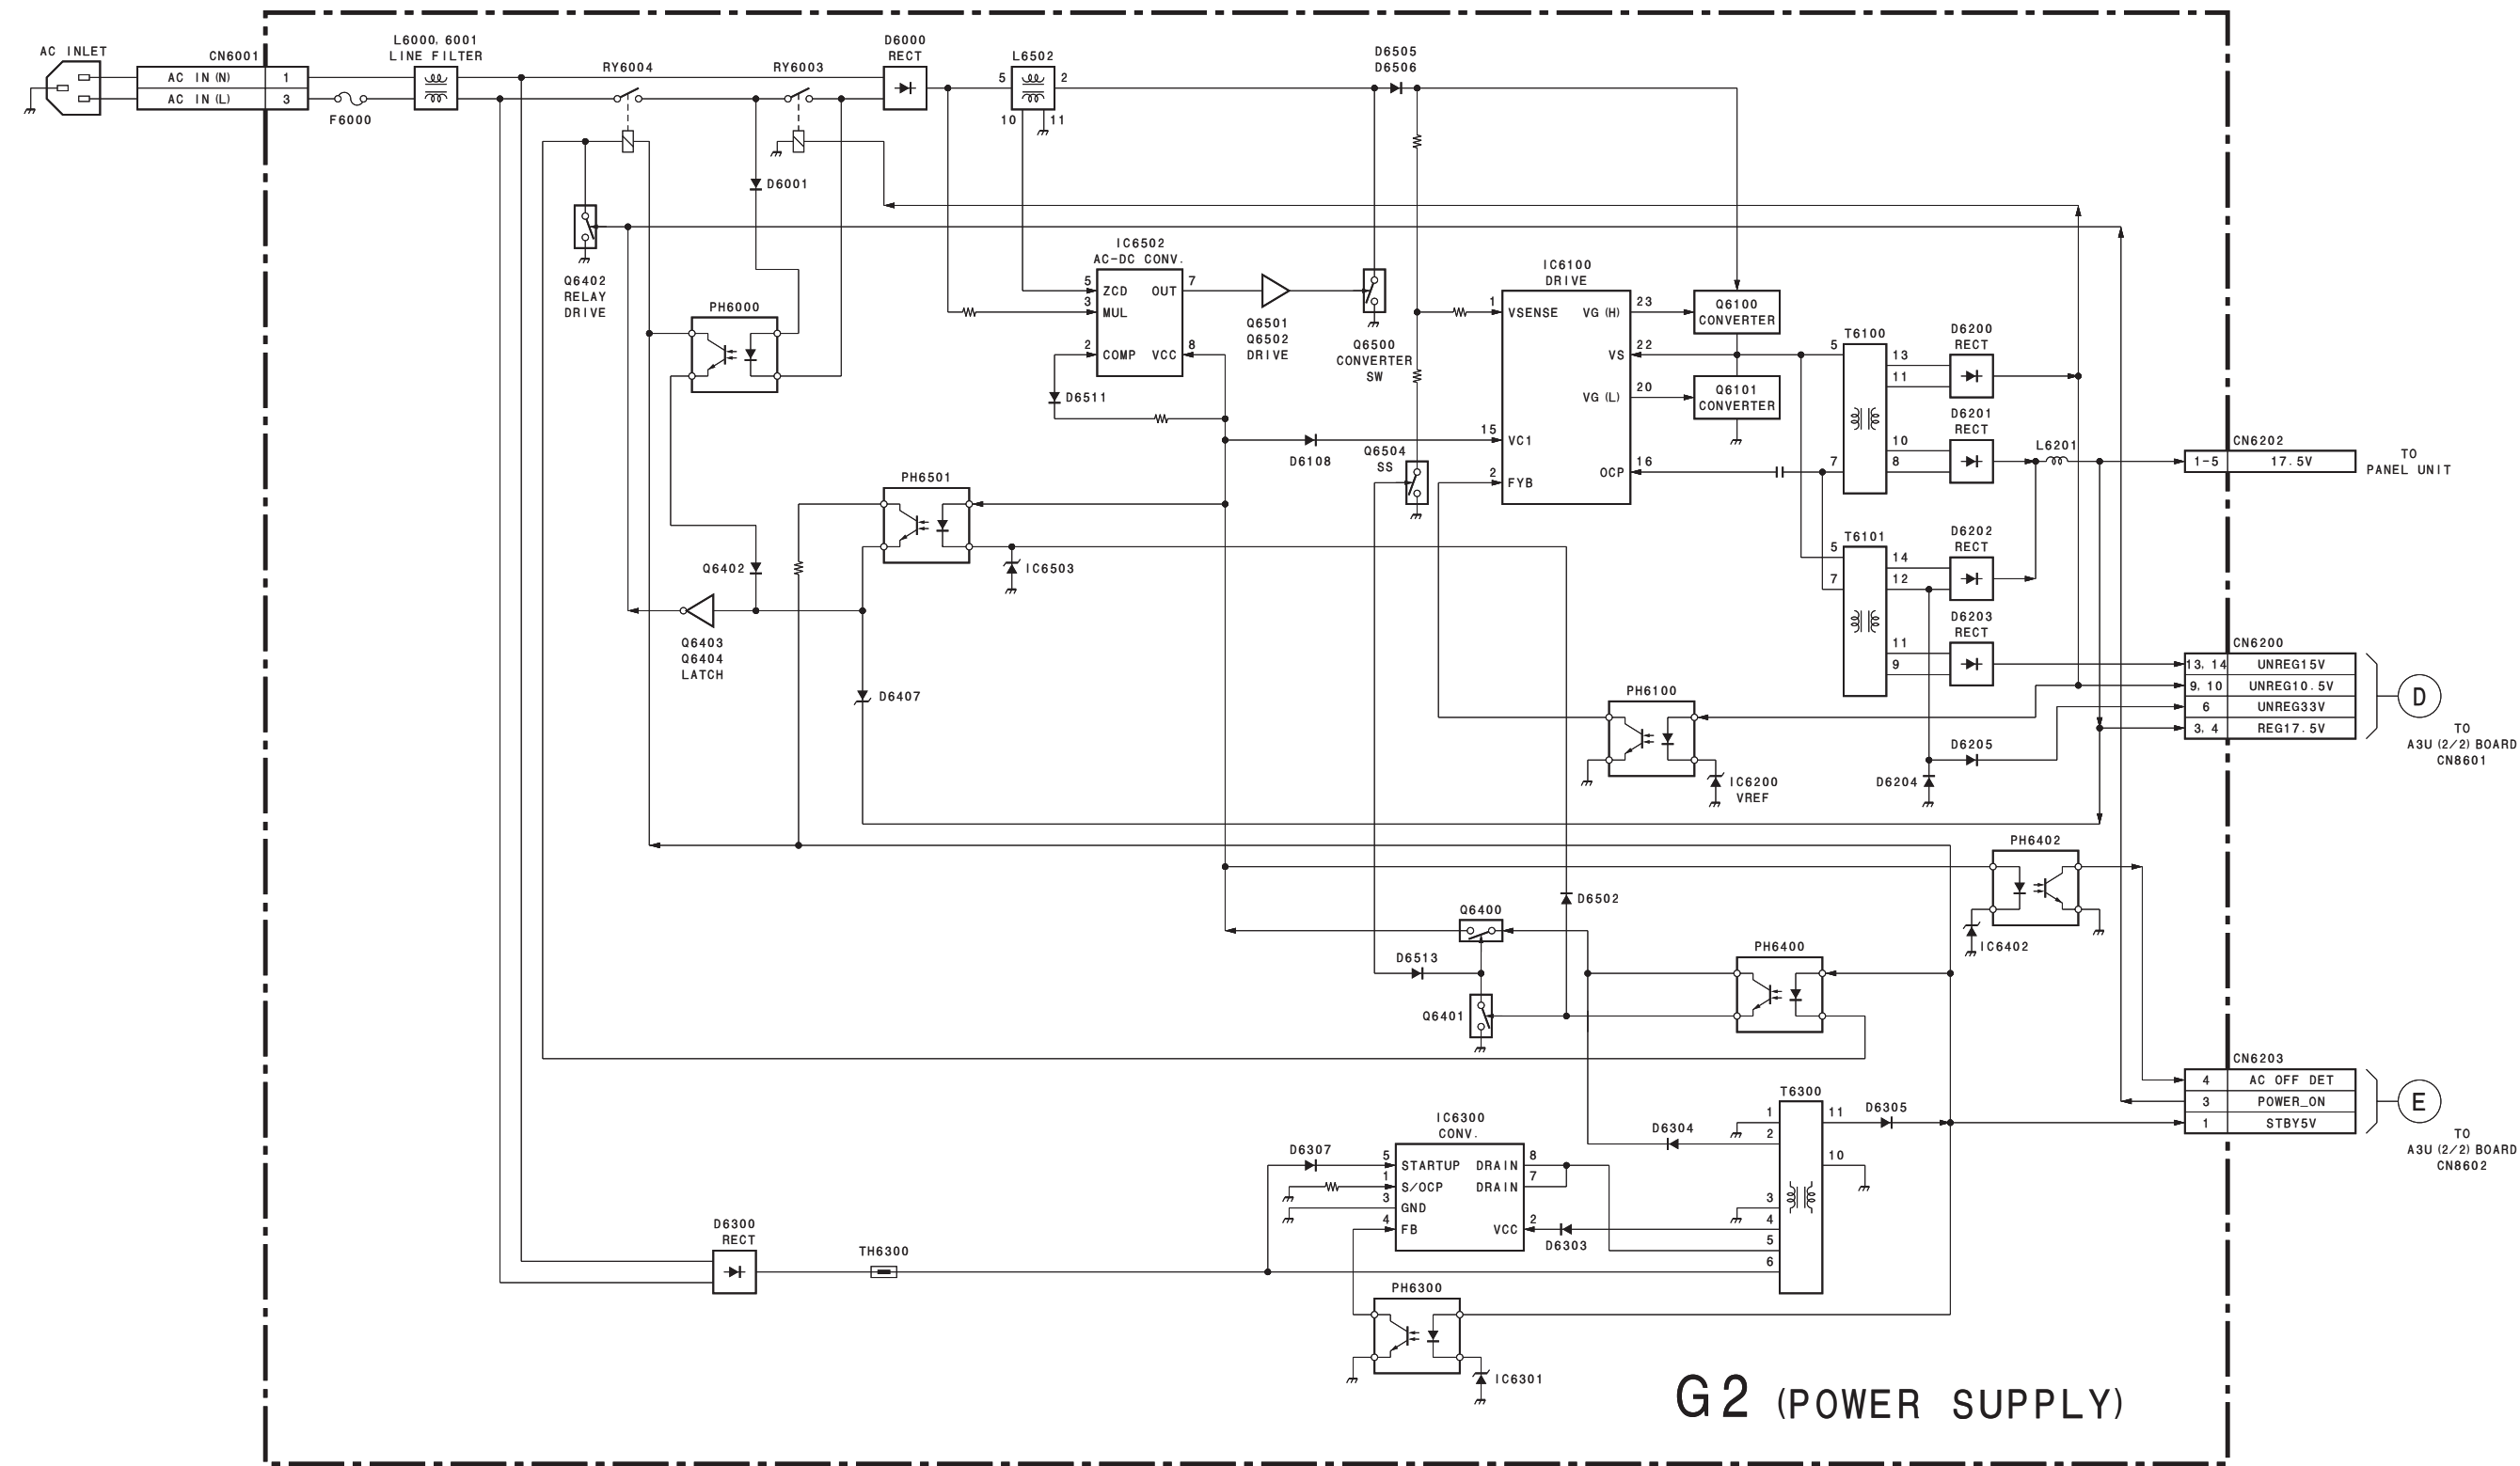

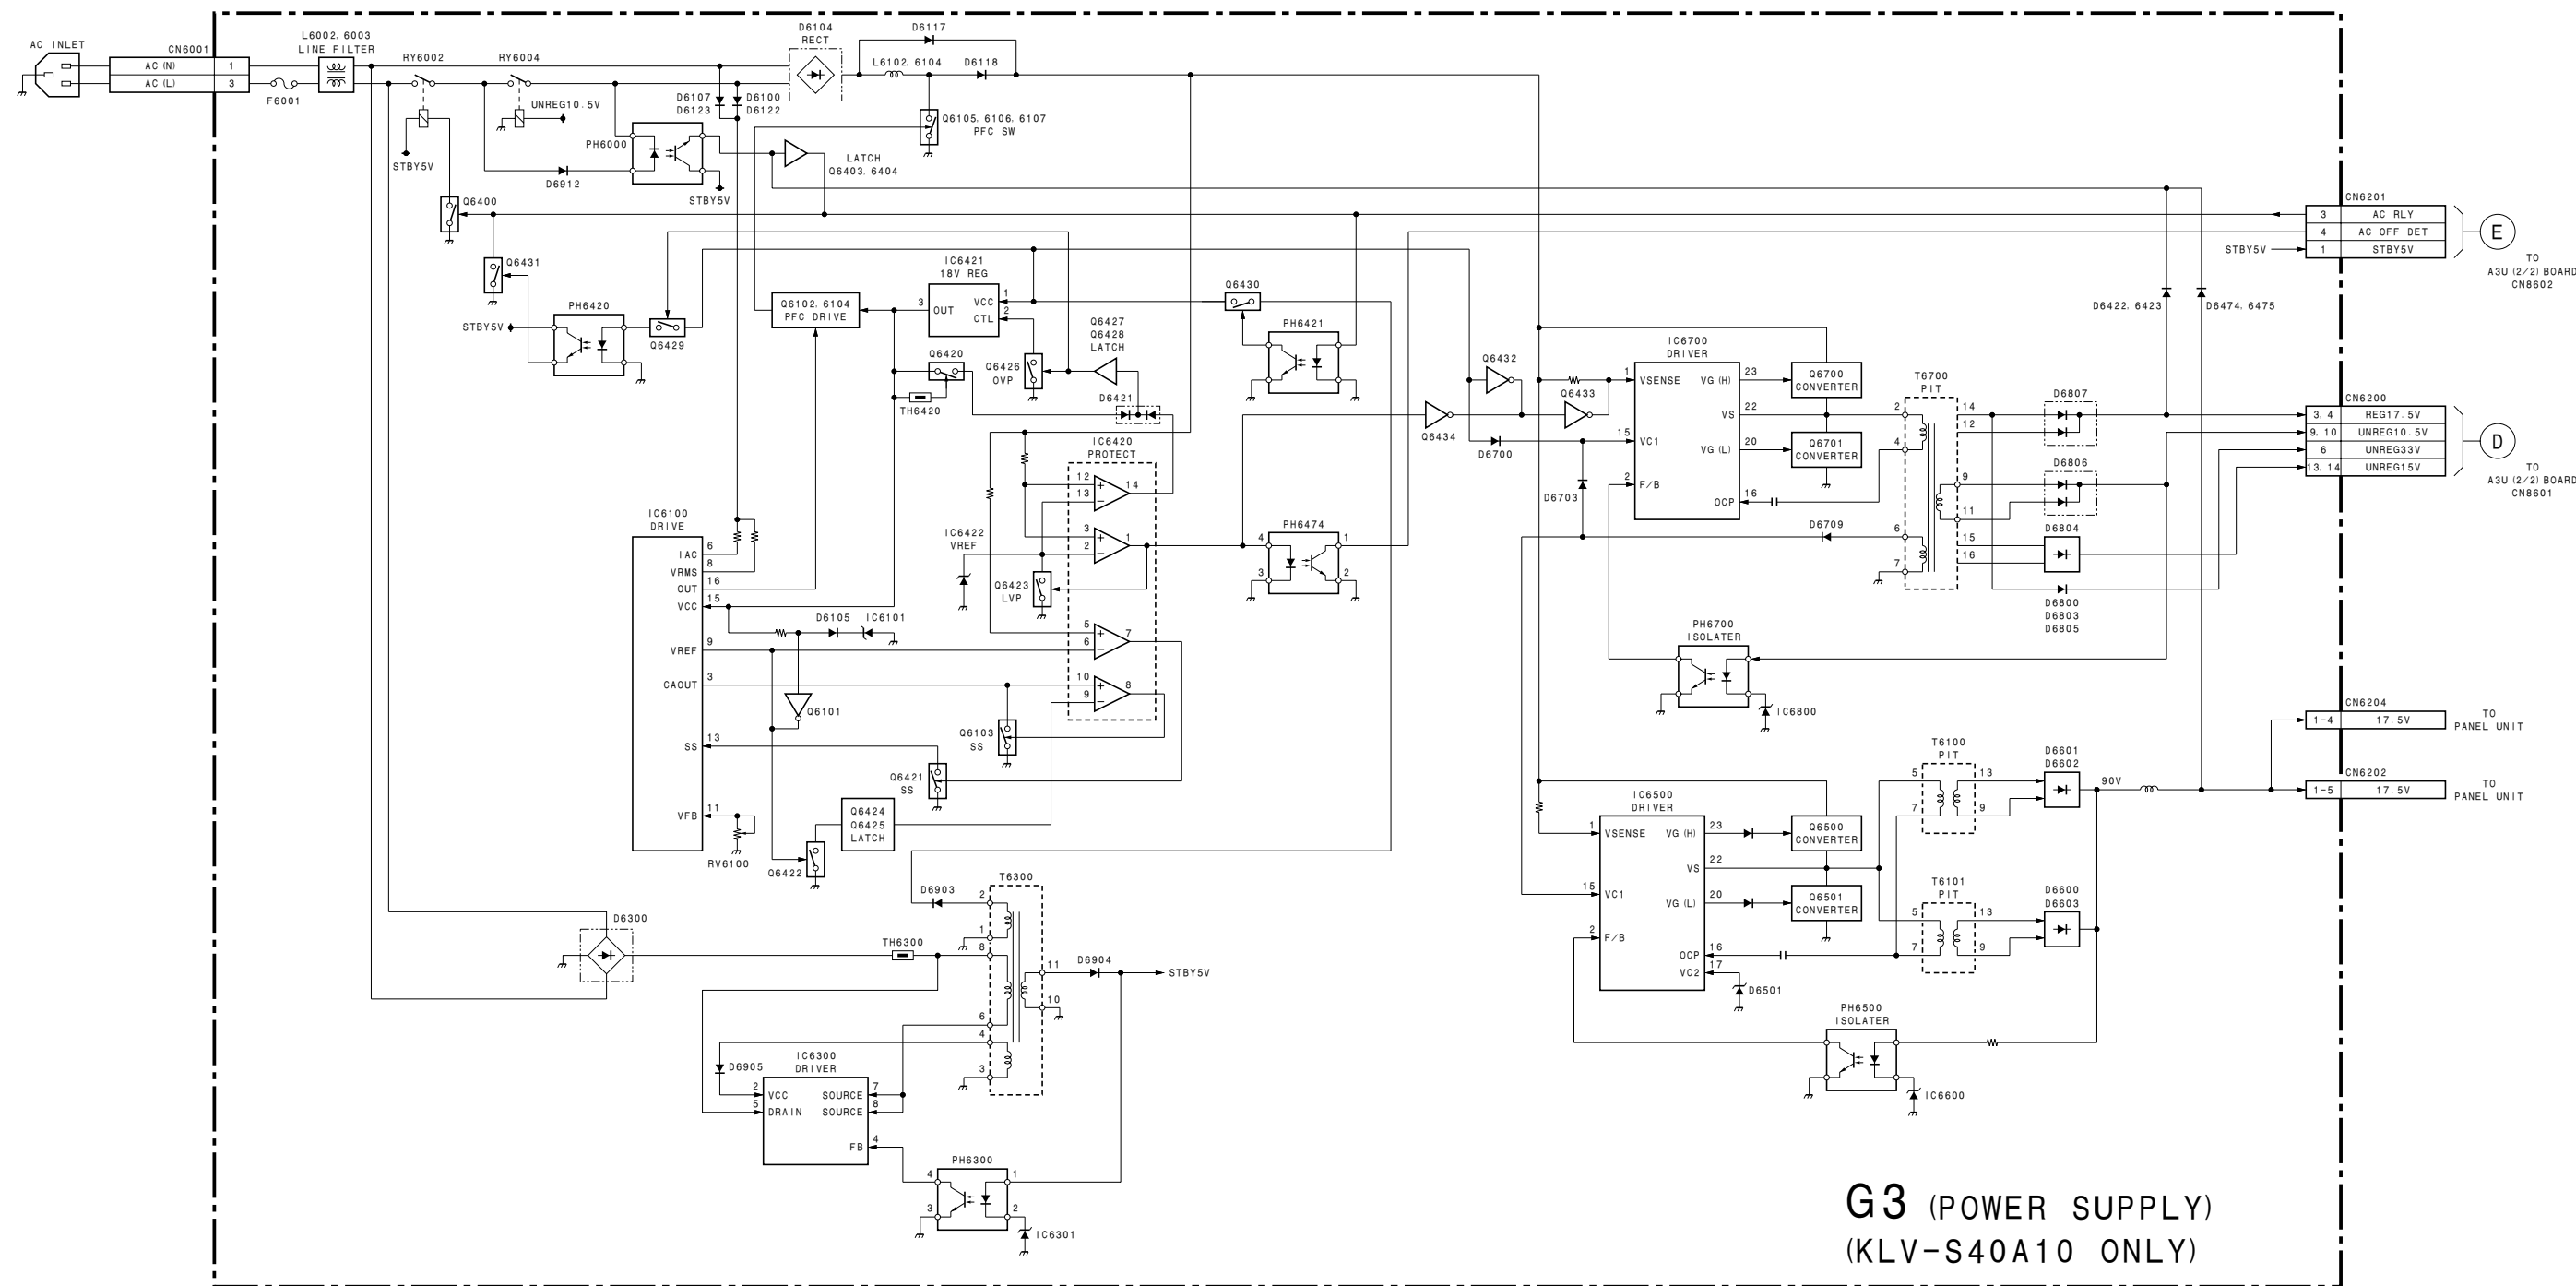


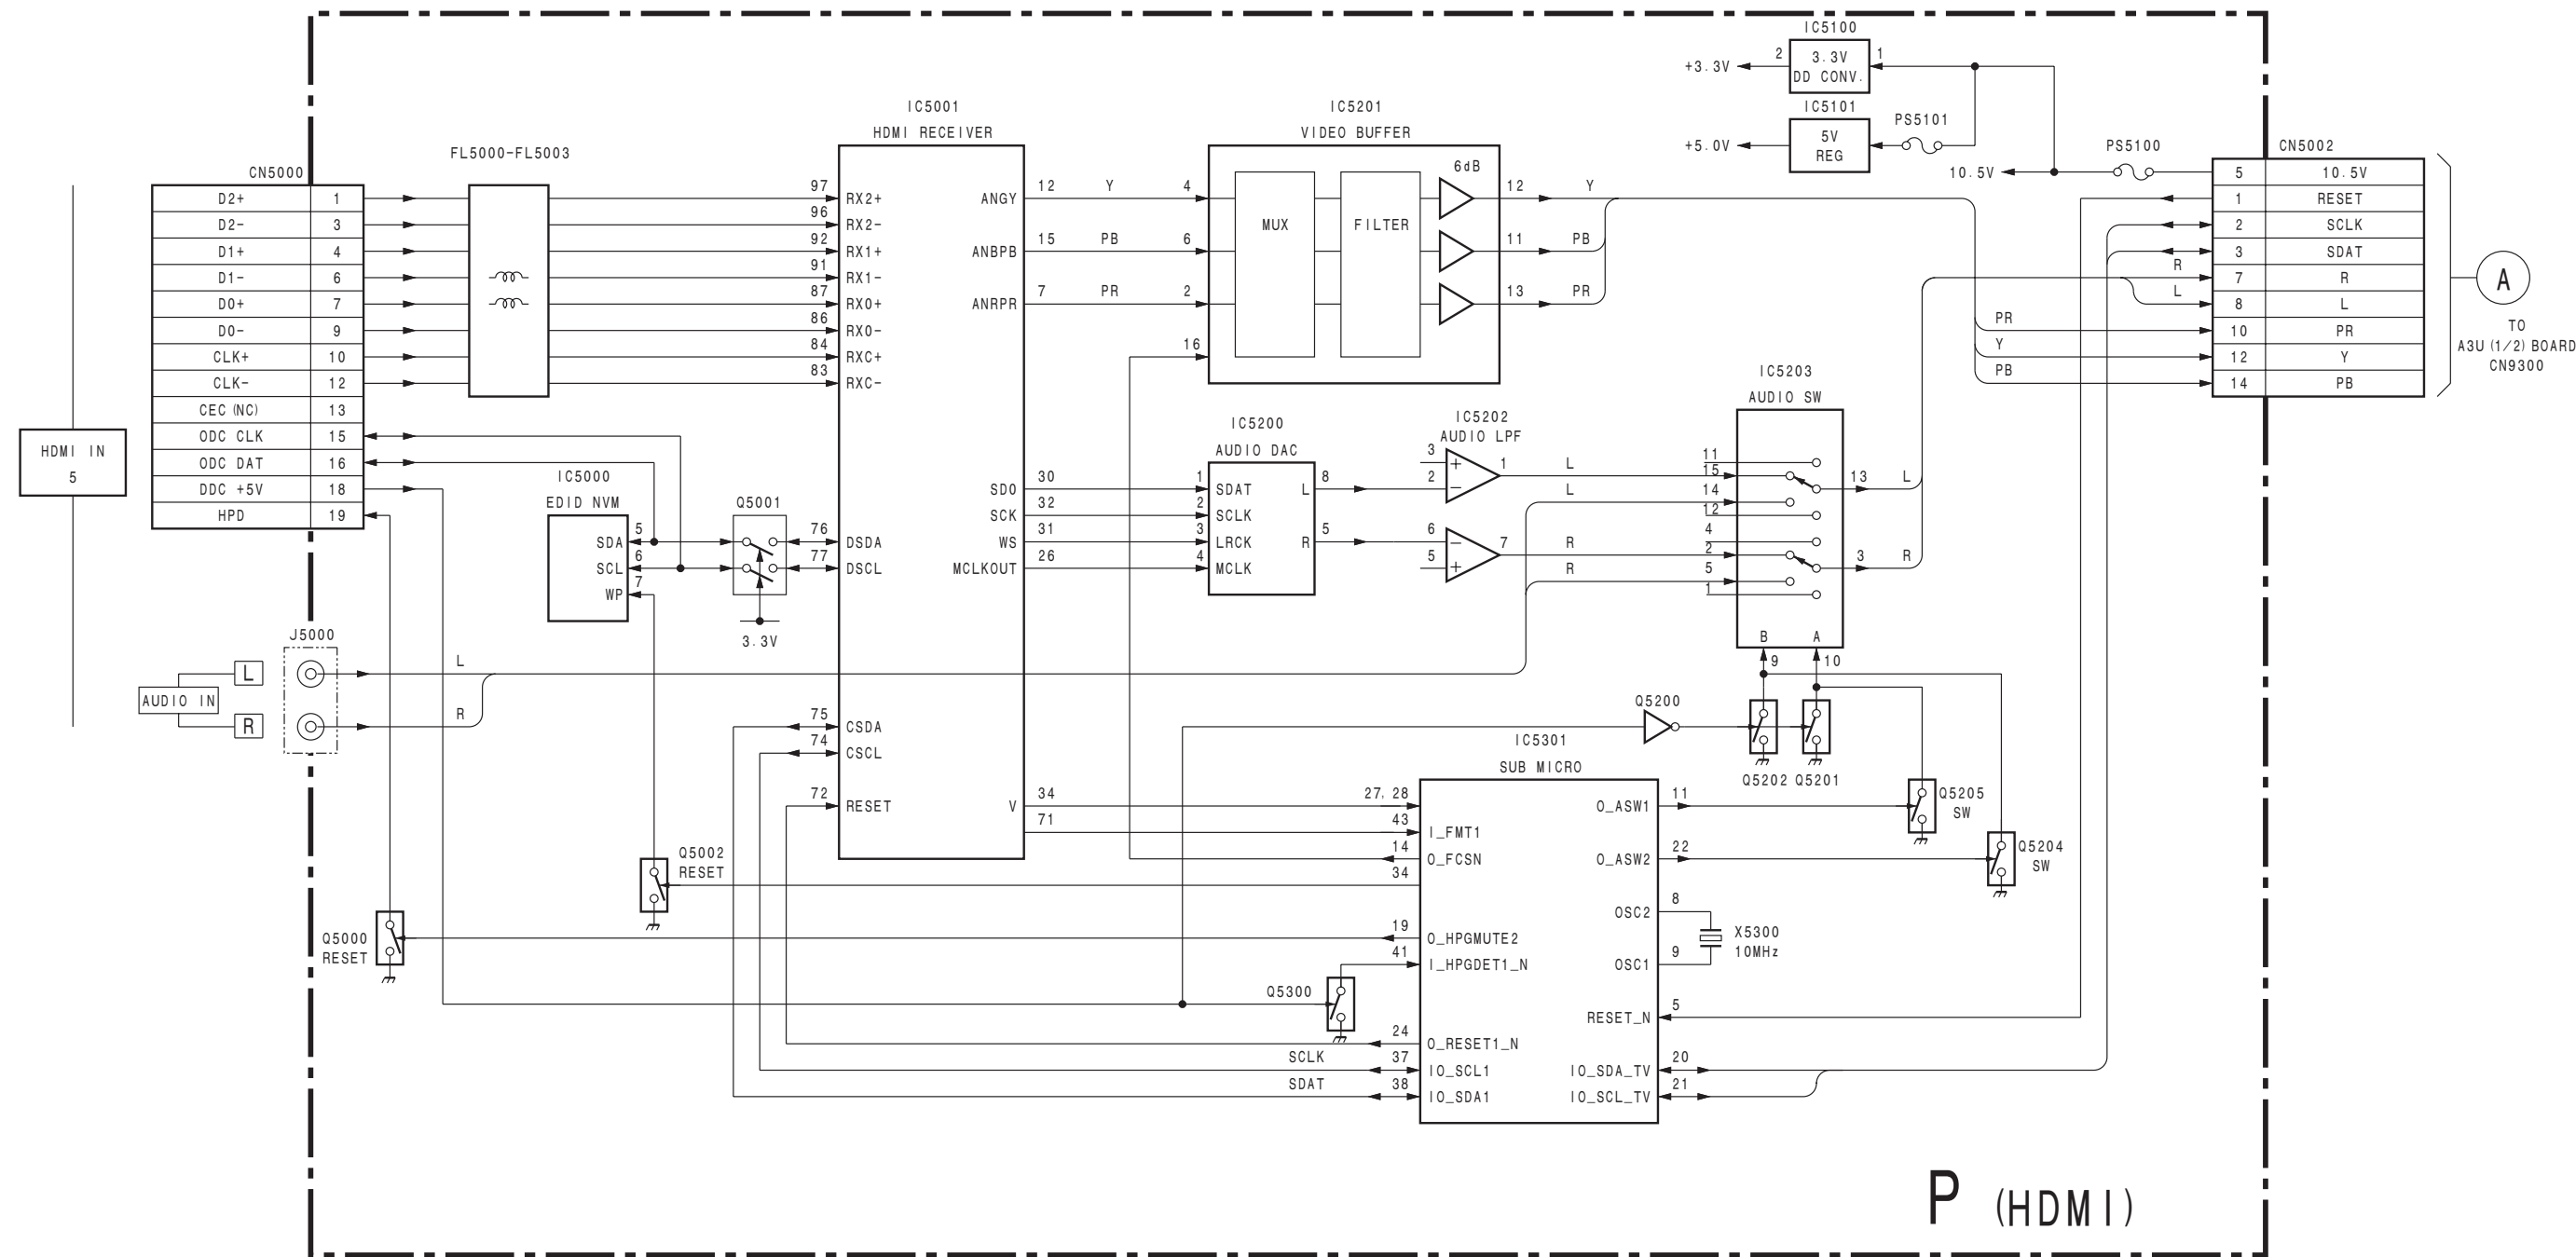

4-2. FRAME DIAGRAMS

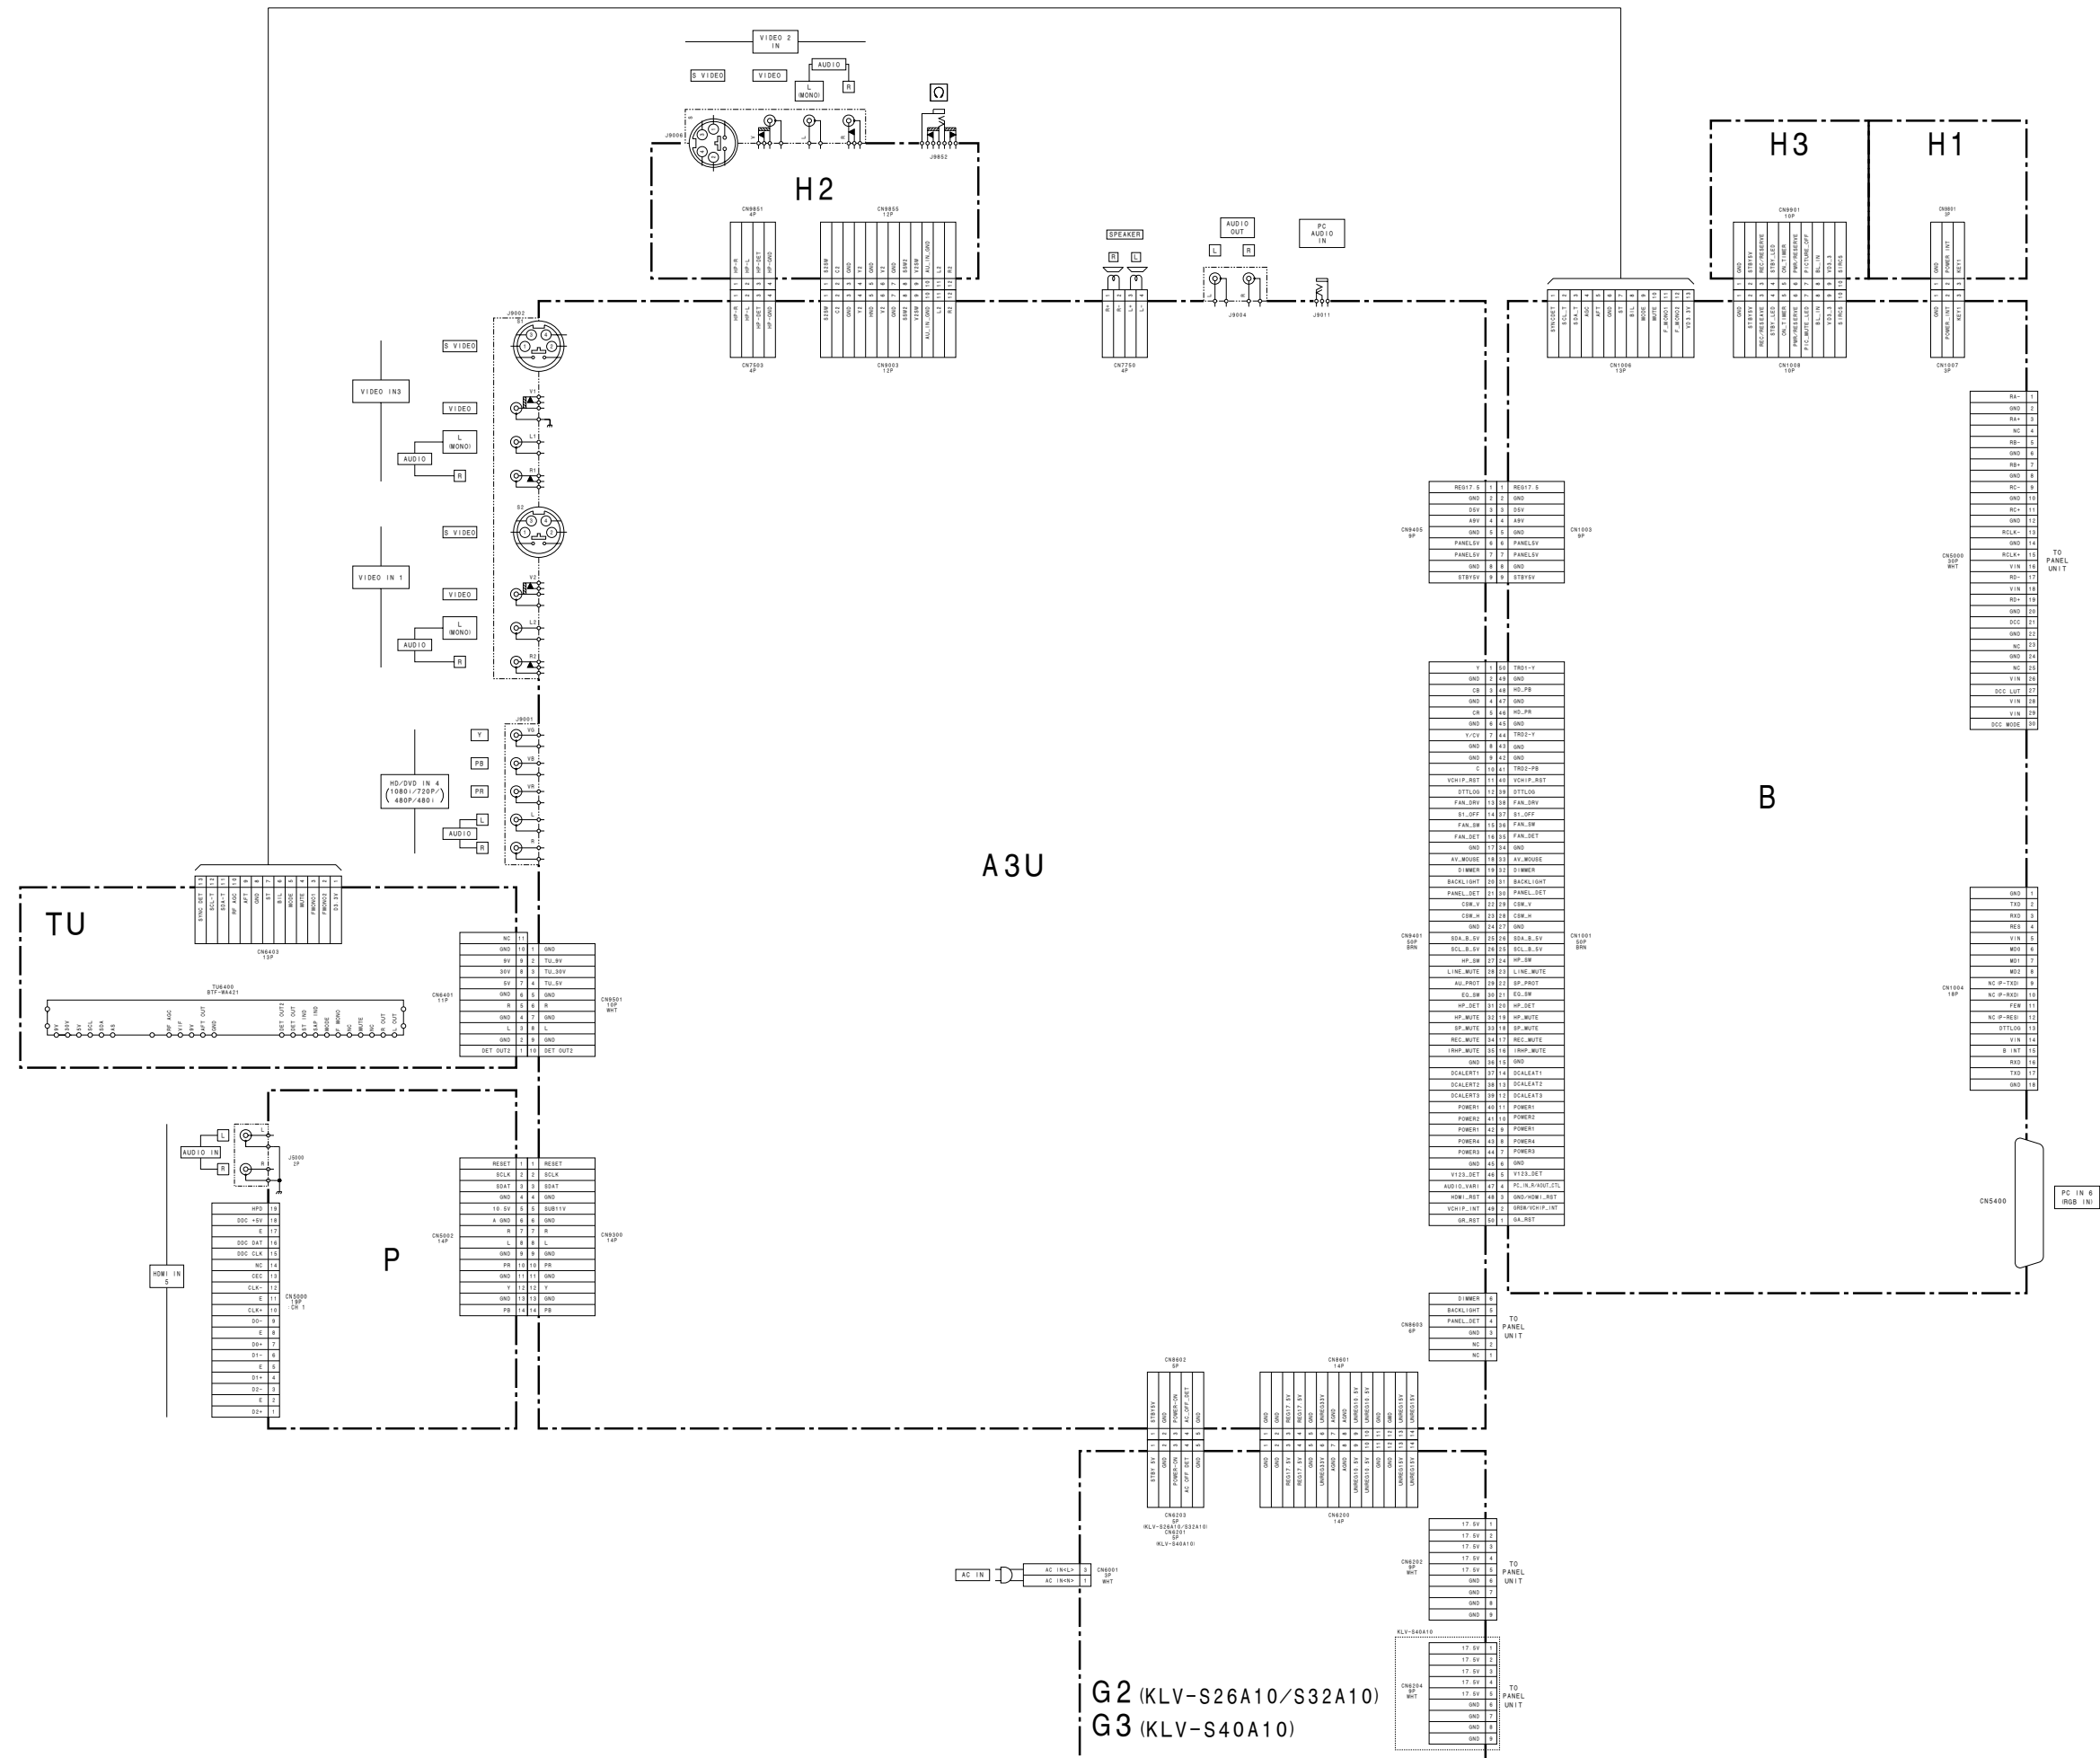

4-3. CIRCUIT BOARDS LOCATION

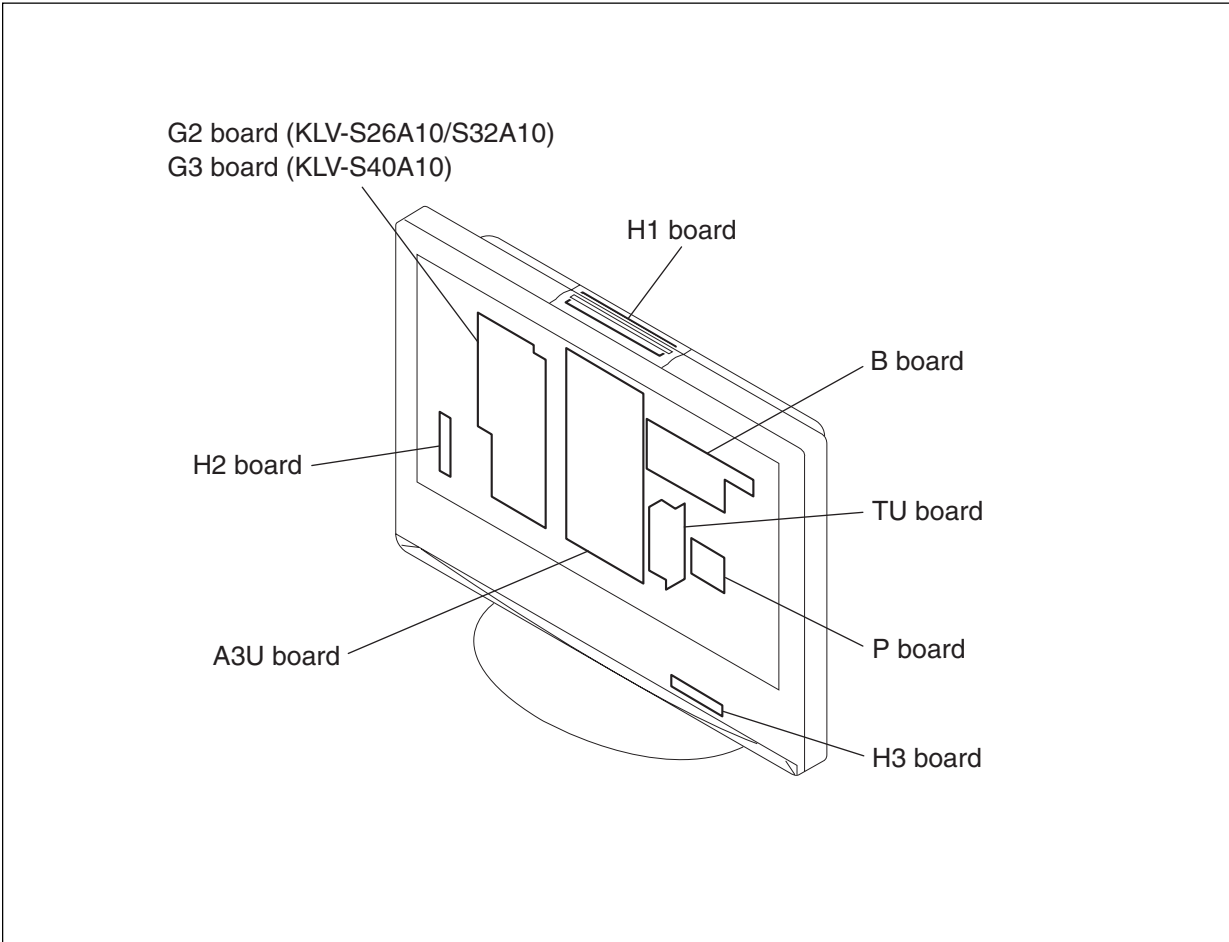

4-4. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS

- Note:**
- Schematic diagrams and printed wiring boards of the specified boards for board replacement service are not included in this section. See Appendix of this manual if you need them.
 - All capacitors are in μF unless otherwise noted. (pF : μF) Capacitors without voltage indication are all 50 V.
 - Indication of resistance, which does not have one for rating electrical power, is as follows.

Pitch: 5 mm
Rating electrical power 1/4 W (CHIP : 1/10 W)

- All resistors are in ohms.
- : nonflammable resistor.
- : fusible resistor.
- : internal component.
- : panel designation, and adjustment for repair.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- : earth-ground.
- : earth-chassis.
- When replacing the part in below table, be sure to perform the related adjustment.
- All voltages are in V.
- Readings are taken with a 10 M Ω digital multimeter.
- Readings are taken with a color-bar signal input.
- Voltage variations may be noted due to normal production tolerances.
- * : Names and values of parts depend on models.
- * : Can not be measured.
- Circled numbers are waveform references.
- : B + bus.
- : B – bus.
- : Signal path.

Note: The components identified by shading and mark are critical for safety. Replace only with part number specified.


Note: Les composants identifiés par un tramé et une marque sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Terminal name of semiconductors in silk screen printed circuit (※)


| | Device | Printed symbol | Terminal name | Circuit |
|---|------------------------|----------------|--------------------------------------|---------|
| ① | Transistor | | Collector Base Emitter | |
| ② | Transistor | | Collector Base Emitter | |
| ③ | Diode | | Cathode Anode | |
| ④ | Diode | | Cathode Anode (NC) | |
| ⑤ | Diode | | Cathode Anode (NC) | |
| ⑥ | Diode | | Common Anode Cathode | |
| ⑦ | Diode | | Common Anode Cathode | |
| ⑧ | Diode | | Common Anode Anode | |
| ⑨ | Diode | | Common Anode Anode | |
| ⑩ | Diode | | Common Cathode Cathode | |
| ⑪ | Diode | | Common Cathode Cathode | |
| ⑫ | Diode | | Anode Anode Cathode Cathode | |
| ⑬ | Transistor (FET) | | Drain Source Gate | |
| ⑭ | Transistor (FET) | | Drain Source Gate | |
| ⑮ | Transistor (FET) | | Source Drain Gate | |
| ⑯ | Transistor | | Emitter Collector Base | |
| ⑰ | Transistor | | C2/B1/E1 E2/B2/C1 | |
| ⑱ | Transistor | | C1/B2/E2 E1/B1/C2 | |
| ⑲ | Transistor | | C1 B2 E2 E1 B1 C2 | |
| ⑳ | Transistor | | C1 B2 E2 E1 B1 C2 | |
| ㉑ | Transistor | | E2 B1 E1 C2 C1(B2) | |
| ㉒ | Transistor | | (B2) B1 E1 E2 C1 C2 | |
| ㉓ | Transistor | | (B2) E2 E1 B1 C2 C1 | |
| — | Discrete semiconductot | | | |


(Chip semiconductors that are not actually used are included.) Ver.1.6

(1) Schematic Diagrams of A3U Board

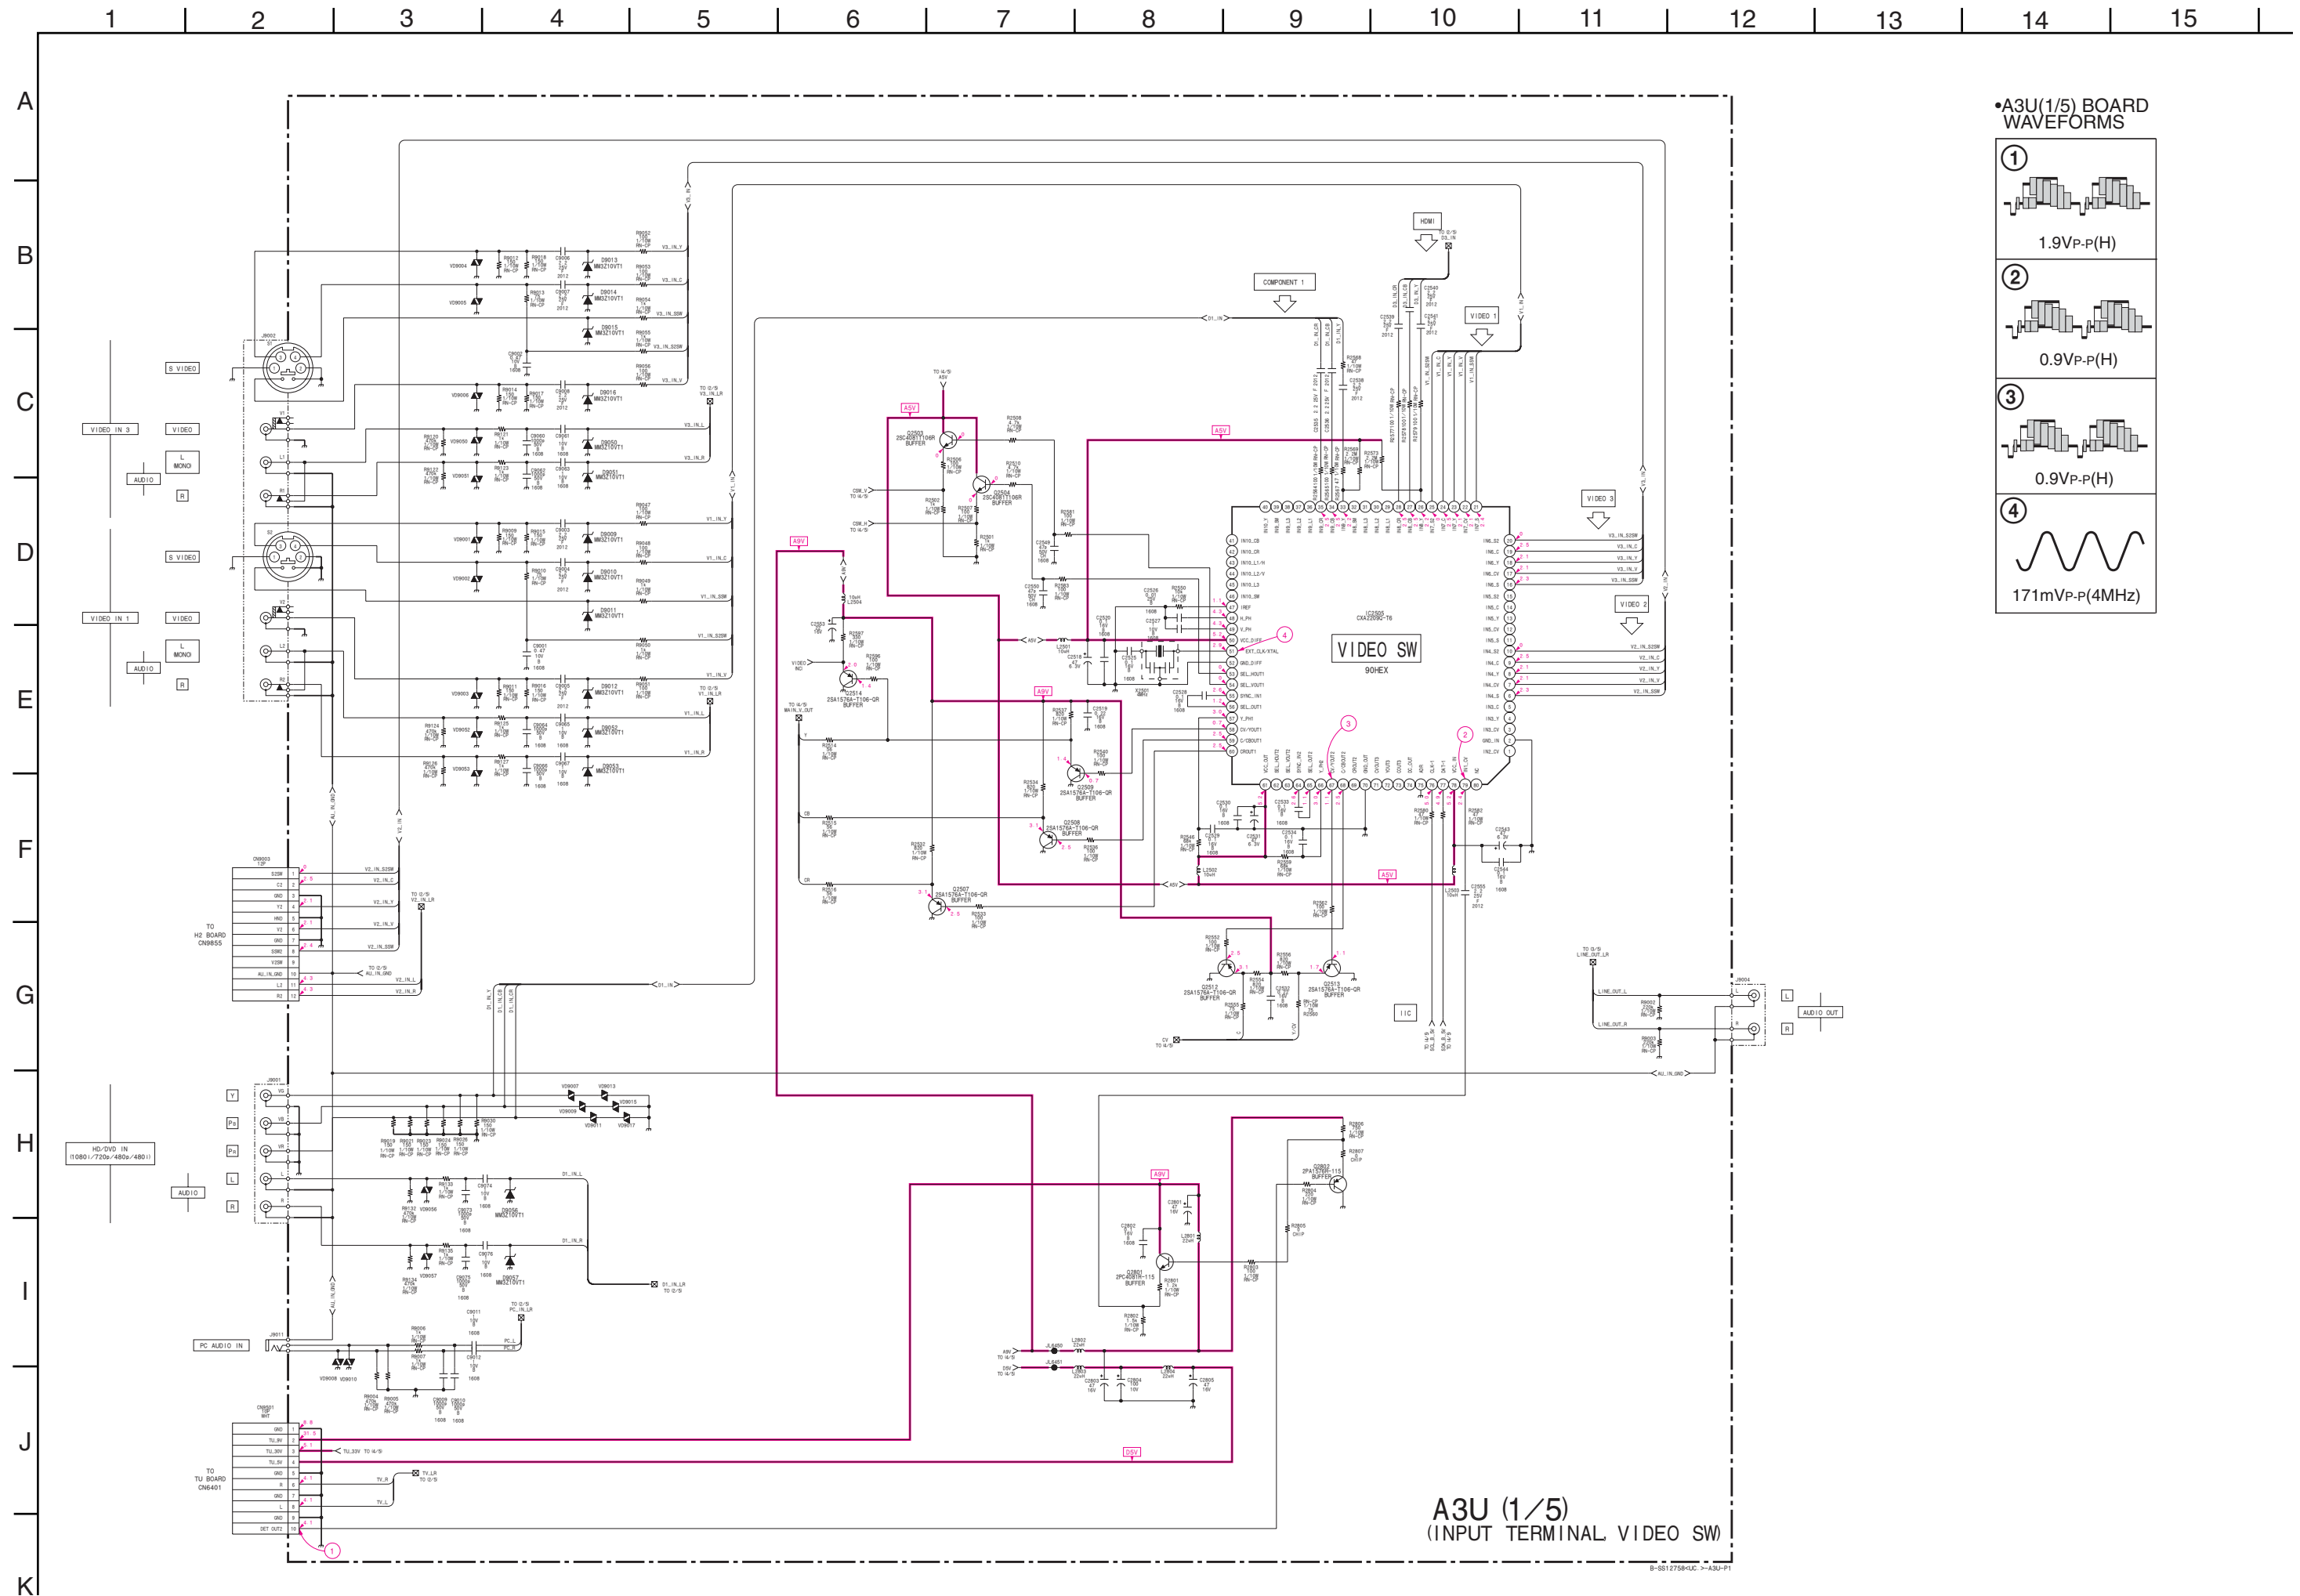


•A3U(1/5) BOARD WAVEFORMS

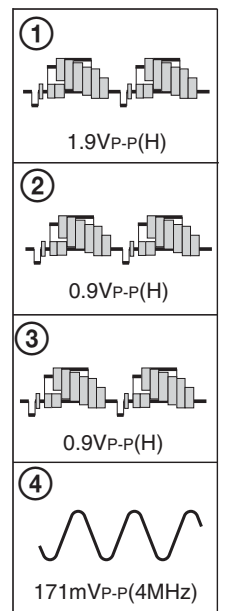


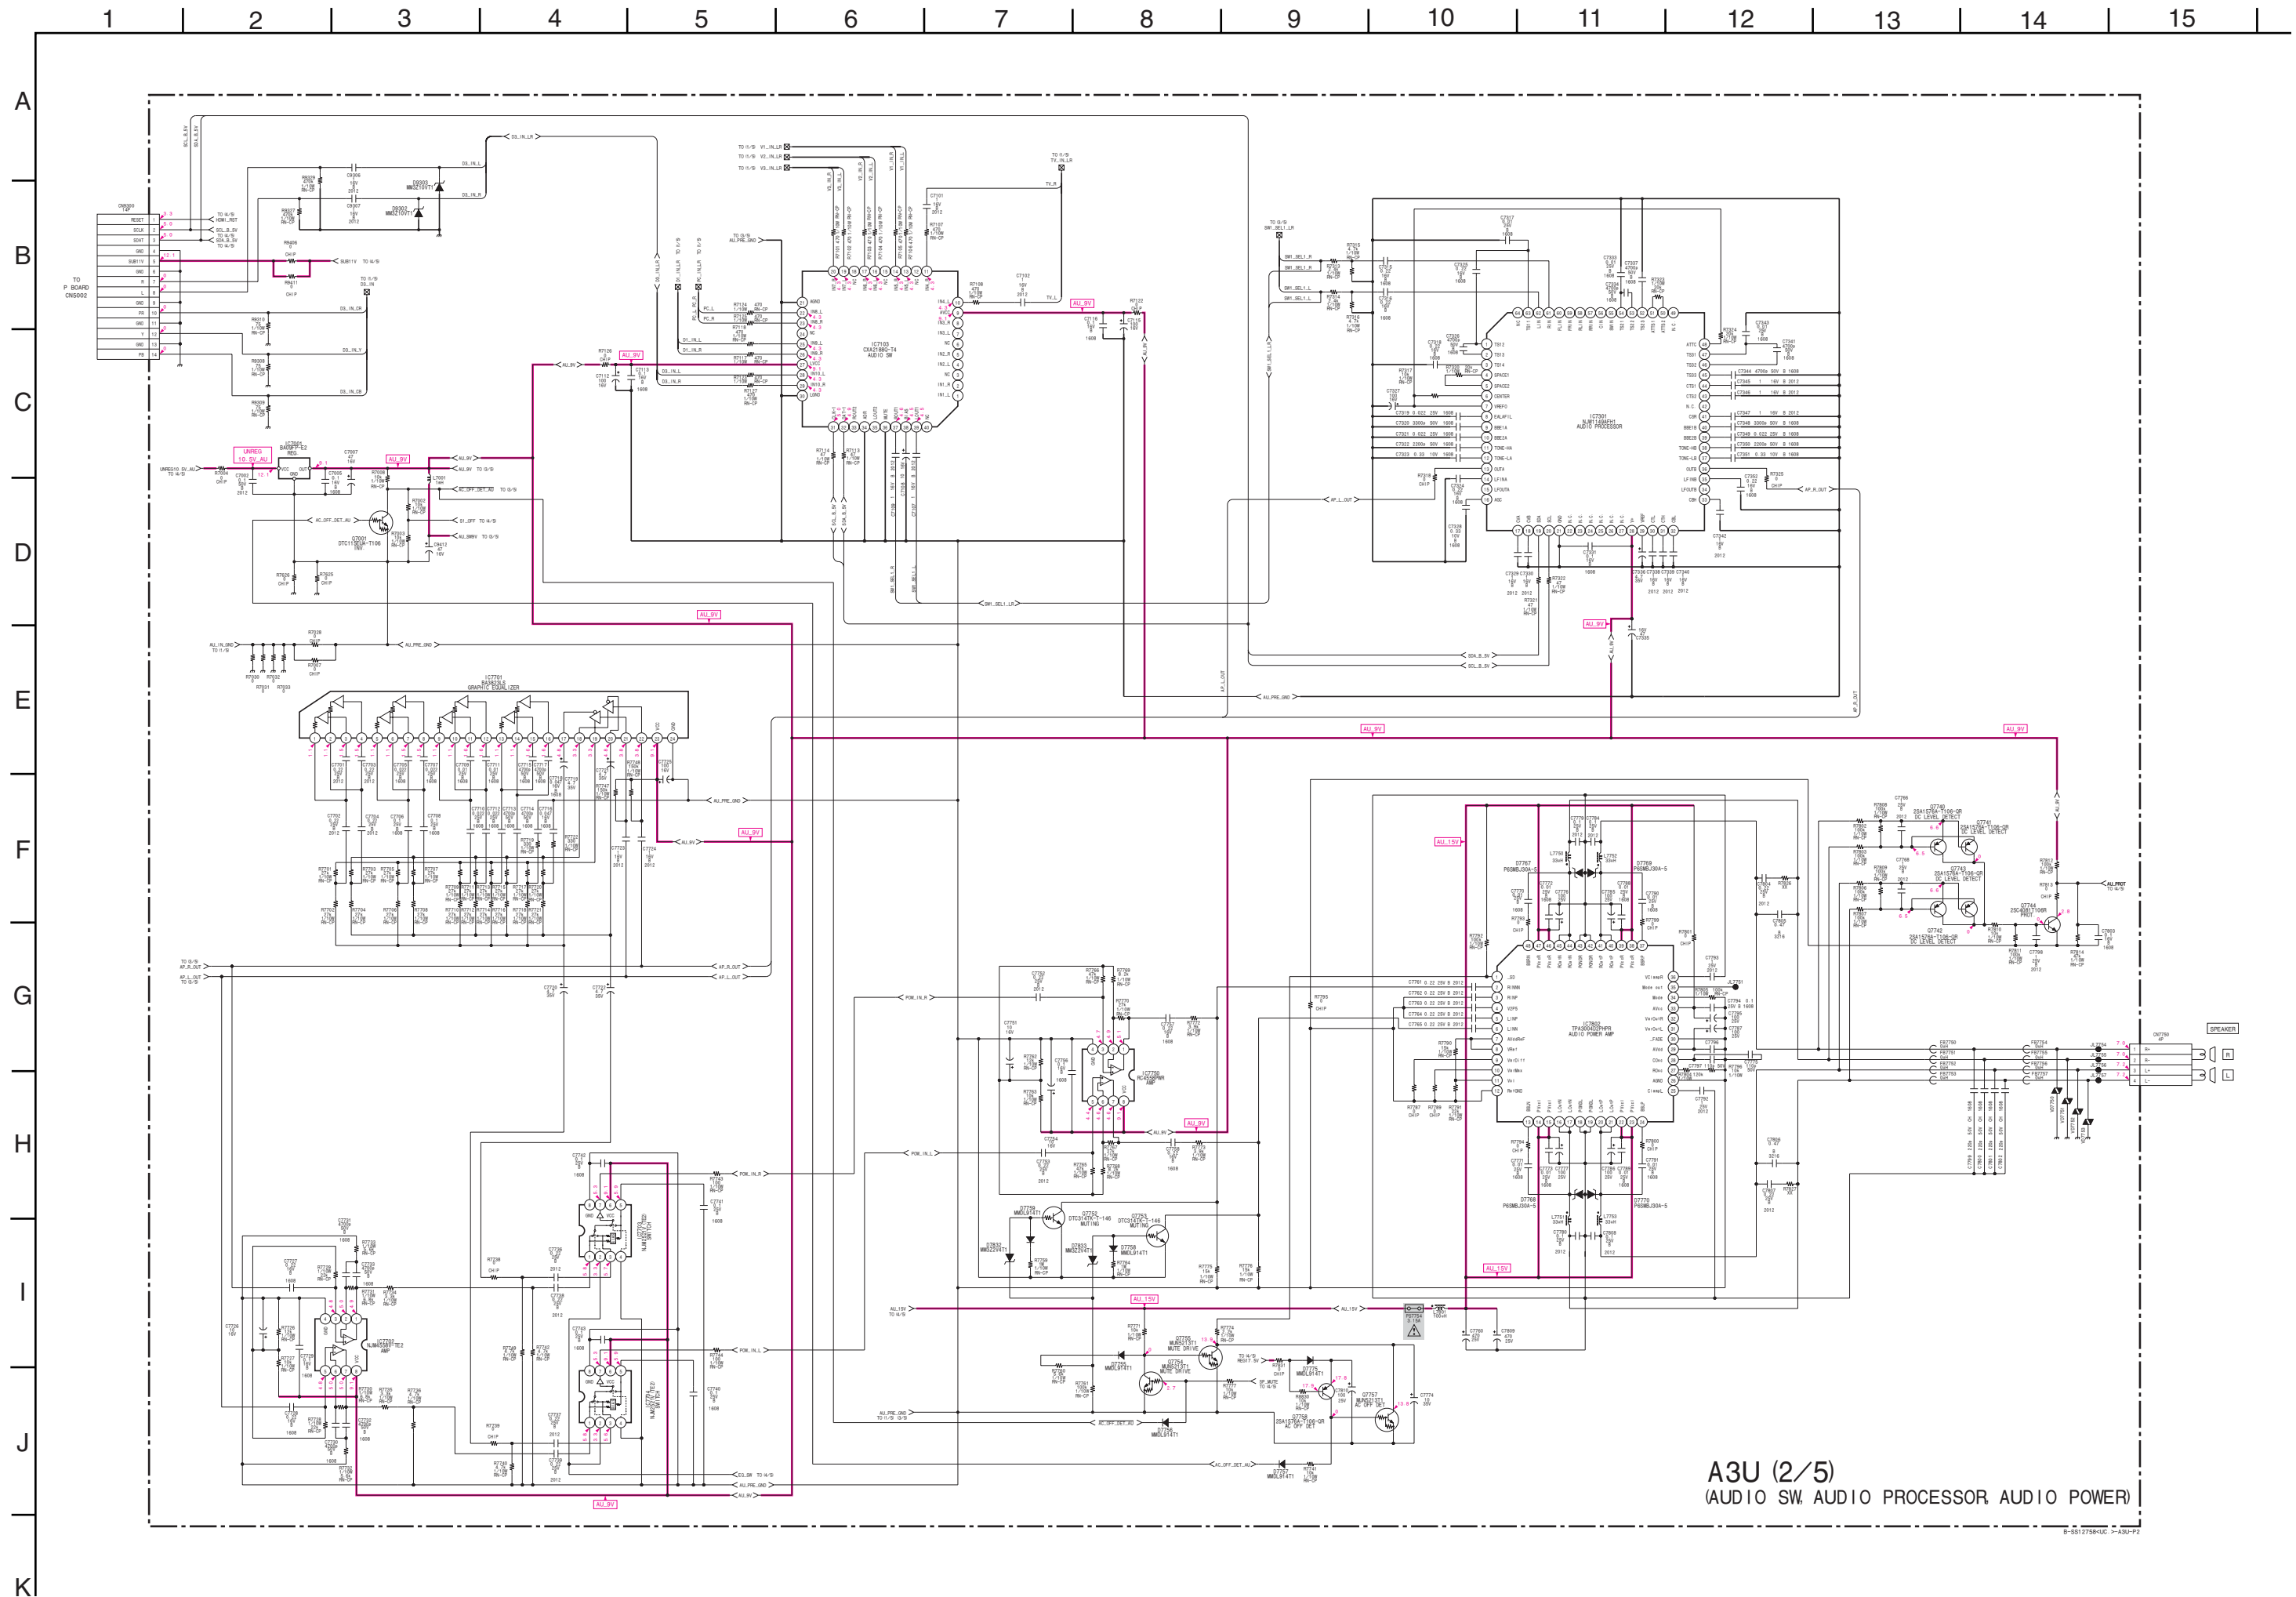

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

A
B
C
D
E
F
G
H
I
J
K

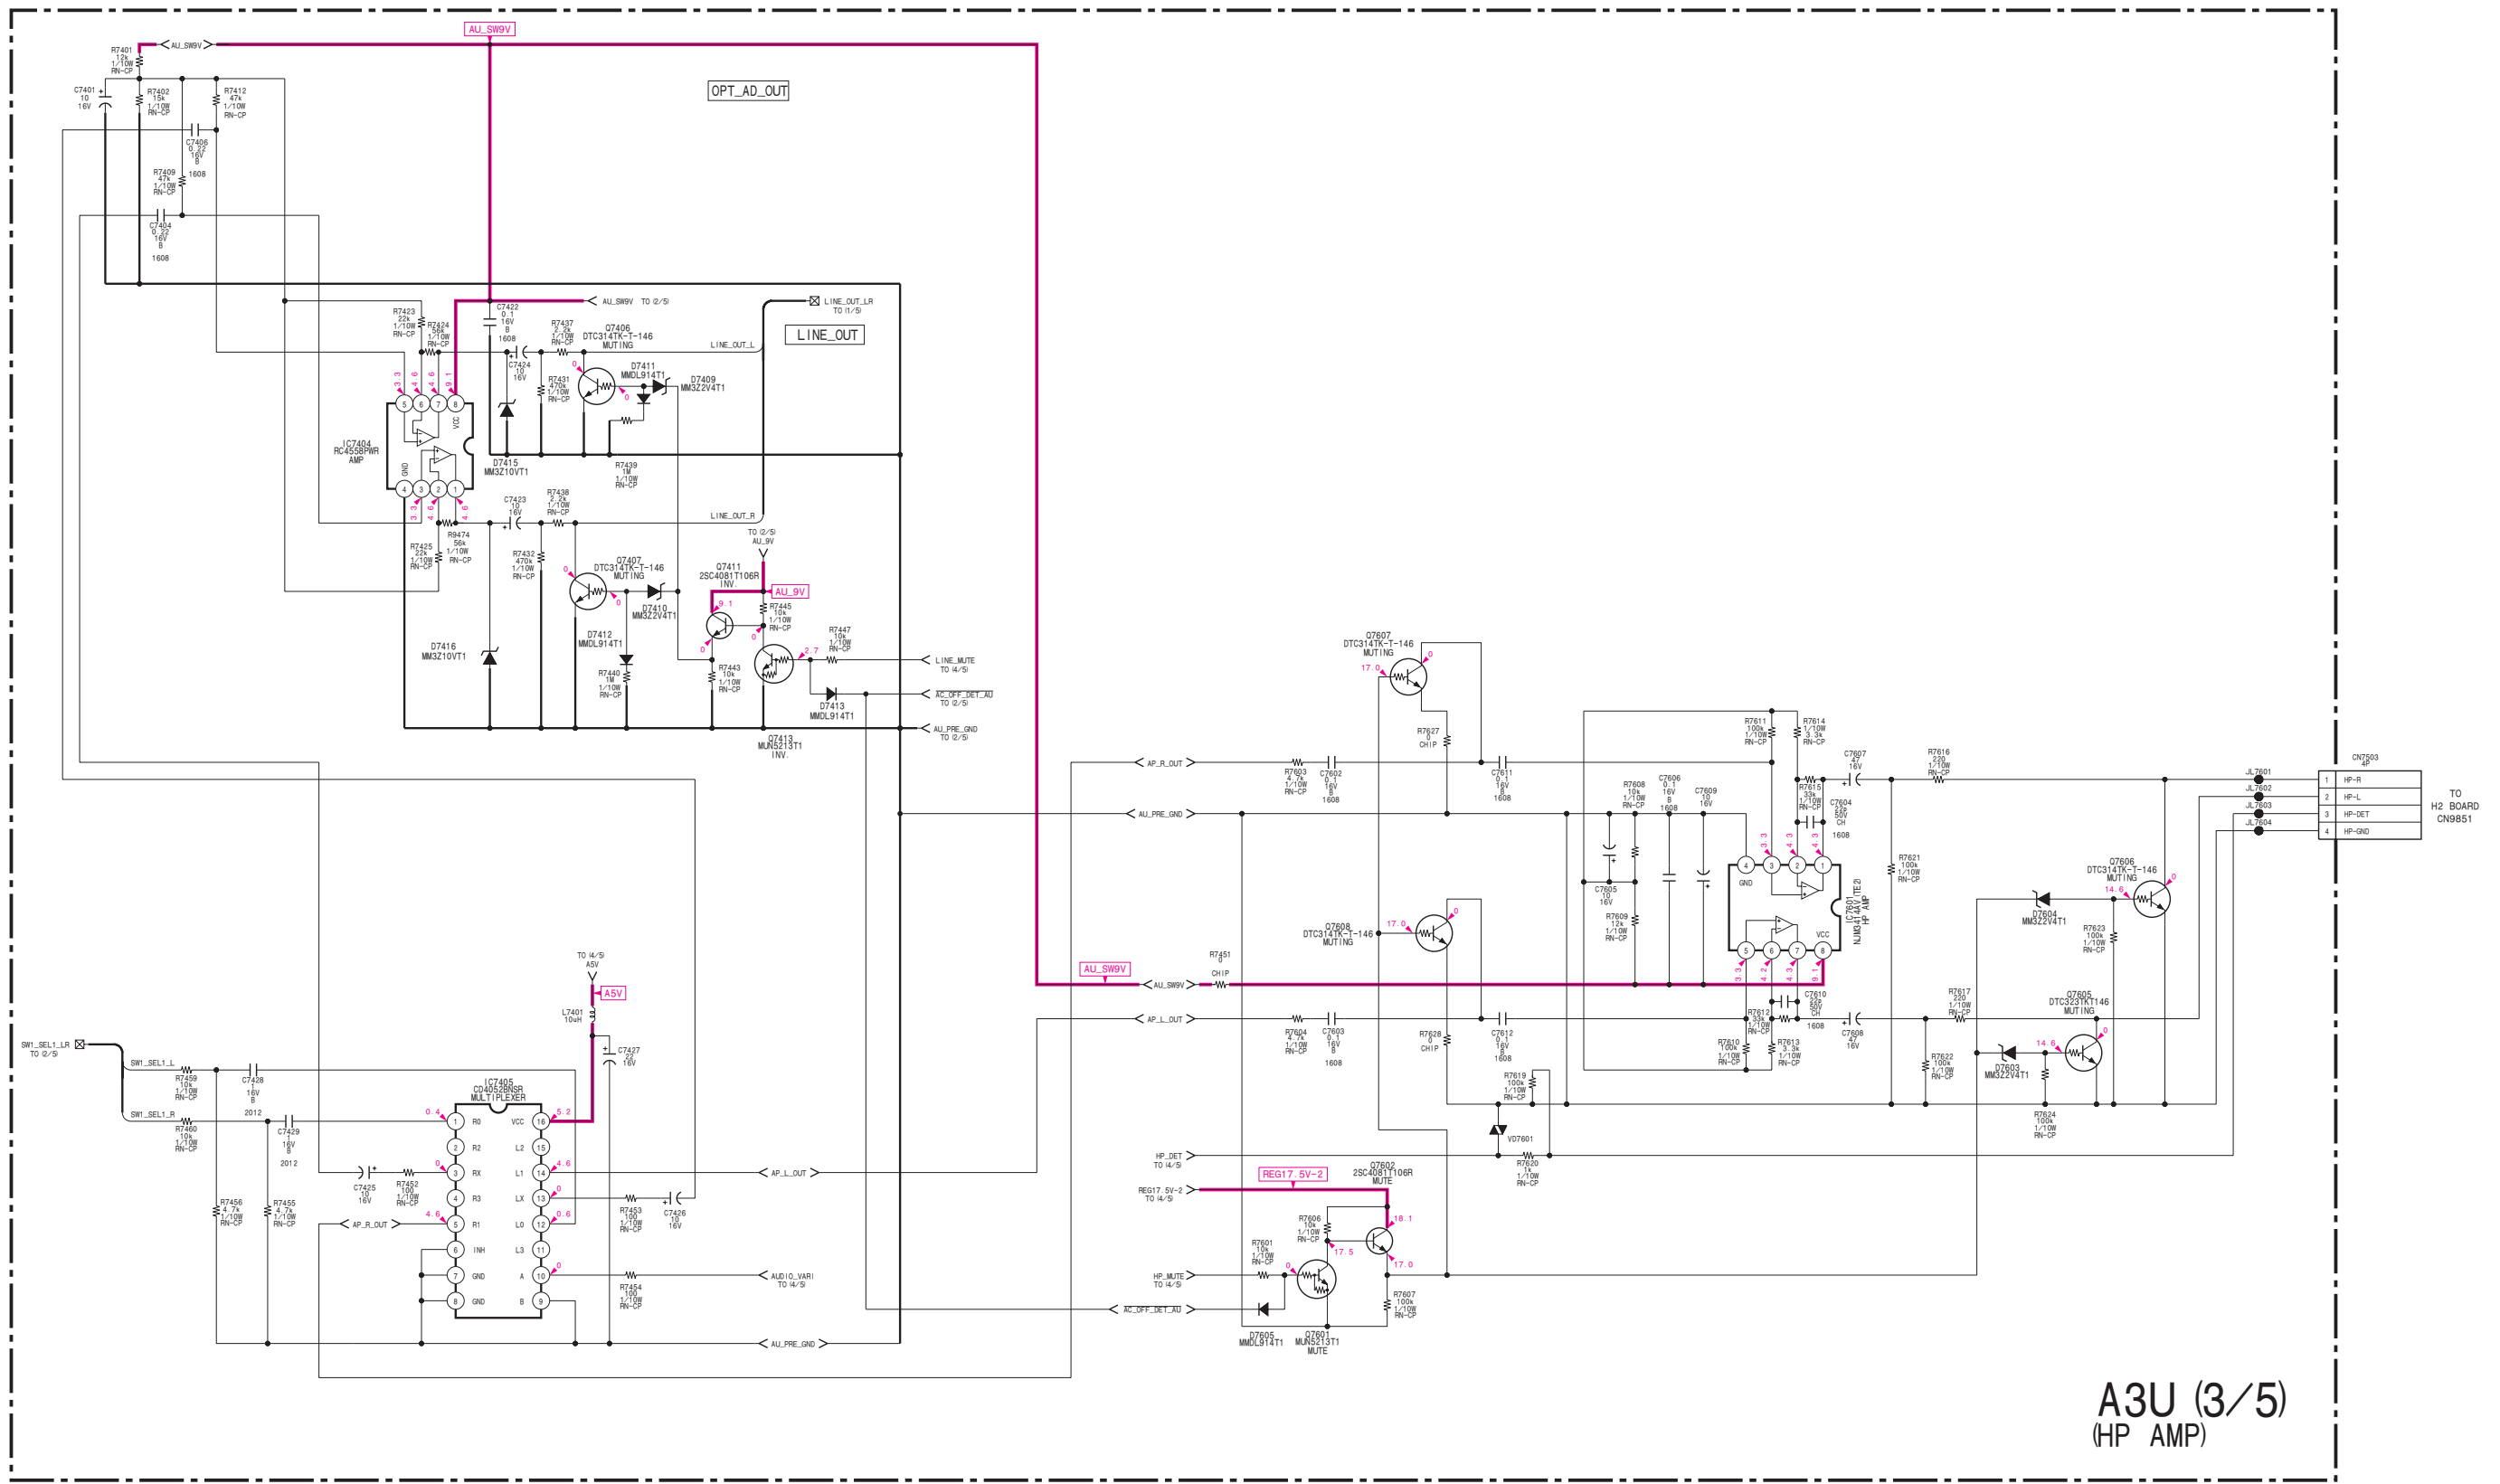








| IC | | TRANSISTOR | | | | DIODE | | | | D7775 B-5 | | | | D9011 A-5 | | | | |
|------------------|------------------|------------------|------------------|-----|-------|-------|-----|---|------------------|------------------|-----|-------|-------|-----------|-----|-------|-----|---|
| (Component Side) | (Conductor Side) | (Component Side) | (Conductor Side) | * | | | | | (Component Side) | (Conductor Side) | * | | | | | | | |
| | | | | | Q7607 | C-4 | ② | | | | | D7775 | B-5 | ③ | | D9011 | A-5 | ③ |
| | | | | | Q7608 | | ② | | | | | D7832 | | ③ | | D9012 | A-5 | ③ |
| | | | | | Q7740 | C-5 | ② | | | | | D7833 | | ③ | | D9013 | B-5 | ③ |
| IC2505 | B-3 | Q2503 | A-4 | ② | Q7741 | C-5 | ② | | D7301 | A-4 | ③ | D8413 | C-6 | ③ | | D9014 | A-5 | ③ |
| IC2731 | B-3 | Q2504 | A-4 | ② | Q7742 | C-5 | ② | | D7302 | A-4 | ① | D8414 | C-6 | ③ | | D9015 | A-5 | ③ |
| IC7001 | A-4 | Q2507 | A-3 | ② | Q7743 | C-5 | ② | | D7303 | A-4 | ③ | D8415 | C-6 | ③ | | D9016 | A-5 | ③ |
| IC7103 | B-2 | Q2508 | A-3 | ② | Q7744 | C-5 | ② | | D7409 | | B-4 | ③ | D8416 | A-5 | ③ | D9050 | A-6 | ③ |
| IC7301 | A-3 | Q2509 | A-3 | ② | Q7752 | | B-2 | ② | D7410 | | B-3 | ③ | D8417 | A-5 | ③ | D9051 | A-6 | ③ |
| IC7404 | | Q2512 | A-2 | ② | Q7753 | | B-2 | ② | D7411 | | B-4 | ③ | D8501 | B-6 | ③ | D9052 | A-6 | ③ |
| IC7405 | B-4 | Q2513 | A-3 | ② | Q7754 | B-5 | ② | | D7412 | | B-4 | ③ | D8504 | B-6 | ③ | D9053 | A-6 | ③ |
| IC7601 | | Q2514 | A-3 | ② | Q7755 | B-5 | ② | | D7413 | | A-3 | ③ | D8551 | B-6 | ③ | D9056 | B-6 | ③ |
| IC7701 | C-3 | Q2731 | | B-4 | Q7757 | B-5 | ② | | D7415 | | B-3 | ③ | D8553 | B-6 | ③ | D9057 | | ③ |
| IC7702 | | Q2801 | | A-5 | Q7758 | B-5 | ② | | D7416 | | B-4 | ③ | D8558 | A-5 | ③ | D9302 | A-3 | ③ |
| IC7703 | | Q2802 | A-3 | ② | Q8403 | | C-1 | ② | D7603 | C-3 | ③ | D8561 | A-5 | ③ | | D9303 | A-3 | ③ |
| IC7704 | | Q2803 | | A-5 | Q8404 | | C-1 | ② | D7604 | C-3 | ③ | D8562 | | A-1 | ③ | D9407 | B-6 | ③ |
| IC7750 | | Q2804 | | A-5 | Q8405 | A-5 | ② | | D7605 | | C-4 | ③ | D8563 | | A-3 | ③ | | |
| IC7802 | B-4 | Q7001 | A-3 | ② | Q8552 | A-5 | ② | | D7755 | | B-2 | ③ | D8565 | | A-2 | ③ | | |
| IC8401 | A-5 | Q7406 | B-4 | ② | Q8560 | | A-3 | ② | D7756 | B-5 | ③ | D8567 | | A-1 | ③ | | | |
| IC8501 | B-6 | Q7407 | B-4 | ② | Q8561 | | A-3 | ② | D7757 | A-5 | ③ | D8615 | B-6 | | ③ | | | |
| IC8552 | B-6 | Q7411 | A-3 | ② | Q8562 | | B-1 | ② | D7758 | | B-2 | ③ | D8616 | B-6 | | ③ | | |
| IC8652 | A-6 | Q7413 | | A-3 | Q8563 | | B-1 | ② | D7759 | | B-2 | ③ | D8617 | B-6 | | ③ | | |
| IC8653 | B-5 | Q7601 | C-3 | ② | Q8601 | | B-1 | ② | D7767 | B-5 | ③ | D9002 | | C-6 | ③ | | | |
| | | Q7602 | C-3 | ② | Q8615 | | A-1 | ② | D7768 | B-4 | ③ | D9003 | | C-6 | ③ | | | |
| | | Q7605 | C-3 | ② | Q8616 | | A-1 | ② | D7769 | C-5 | ③ | D9009 | | A-5 | ③ | | | |
| | | Q7606 | C-3 | ② | | | | | D7770 | C-4 | ③ | D9010 | | A-5 | ③ | | | |

KLV-S26/S32/S40A10 (UC/WB/CND/MX) 4-14

(2) Schematic Diagram of G2 Board (KLV-S26/S32A10 ONLY)

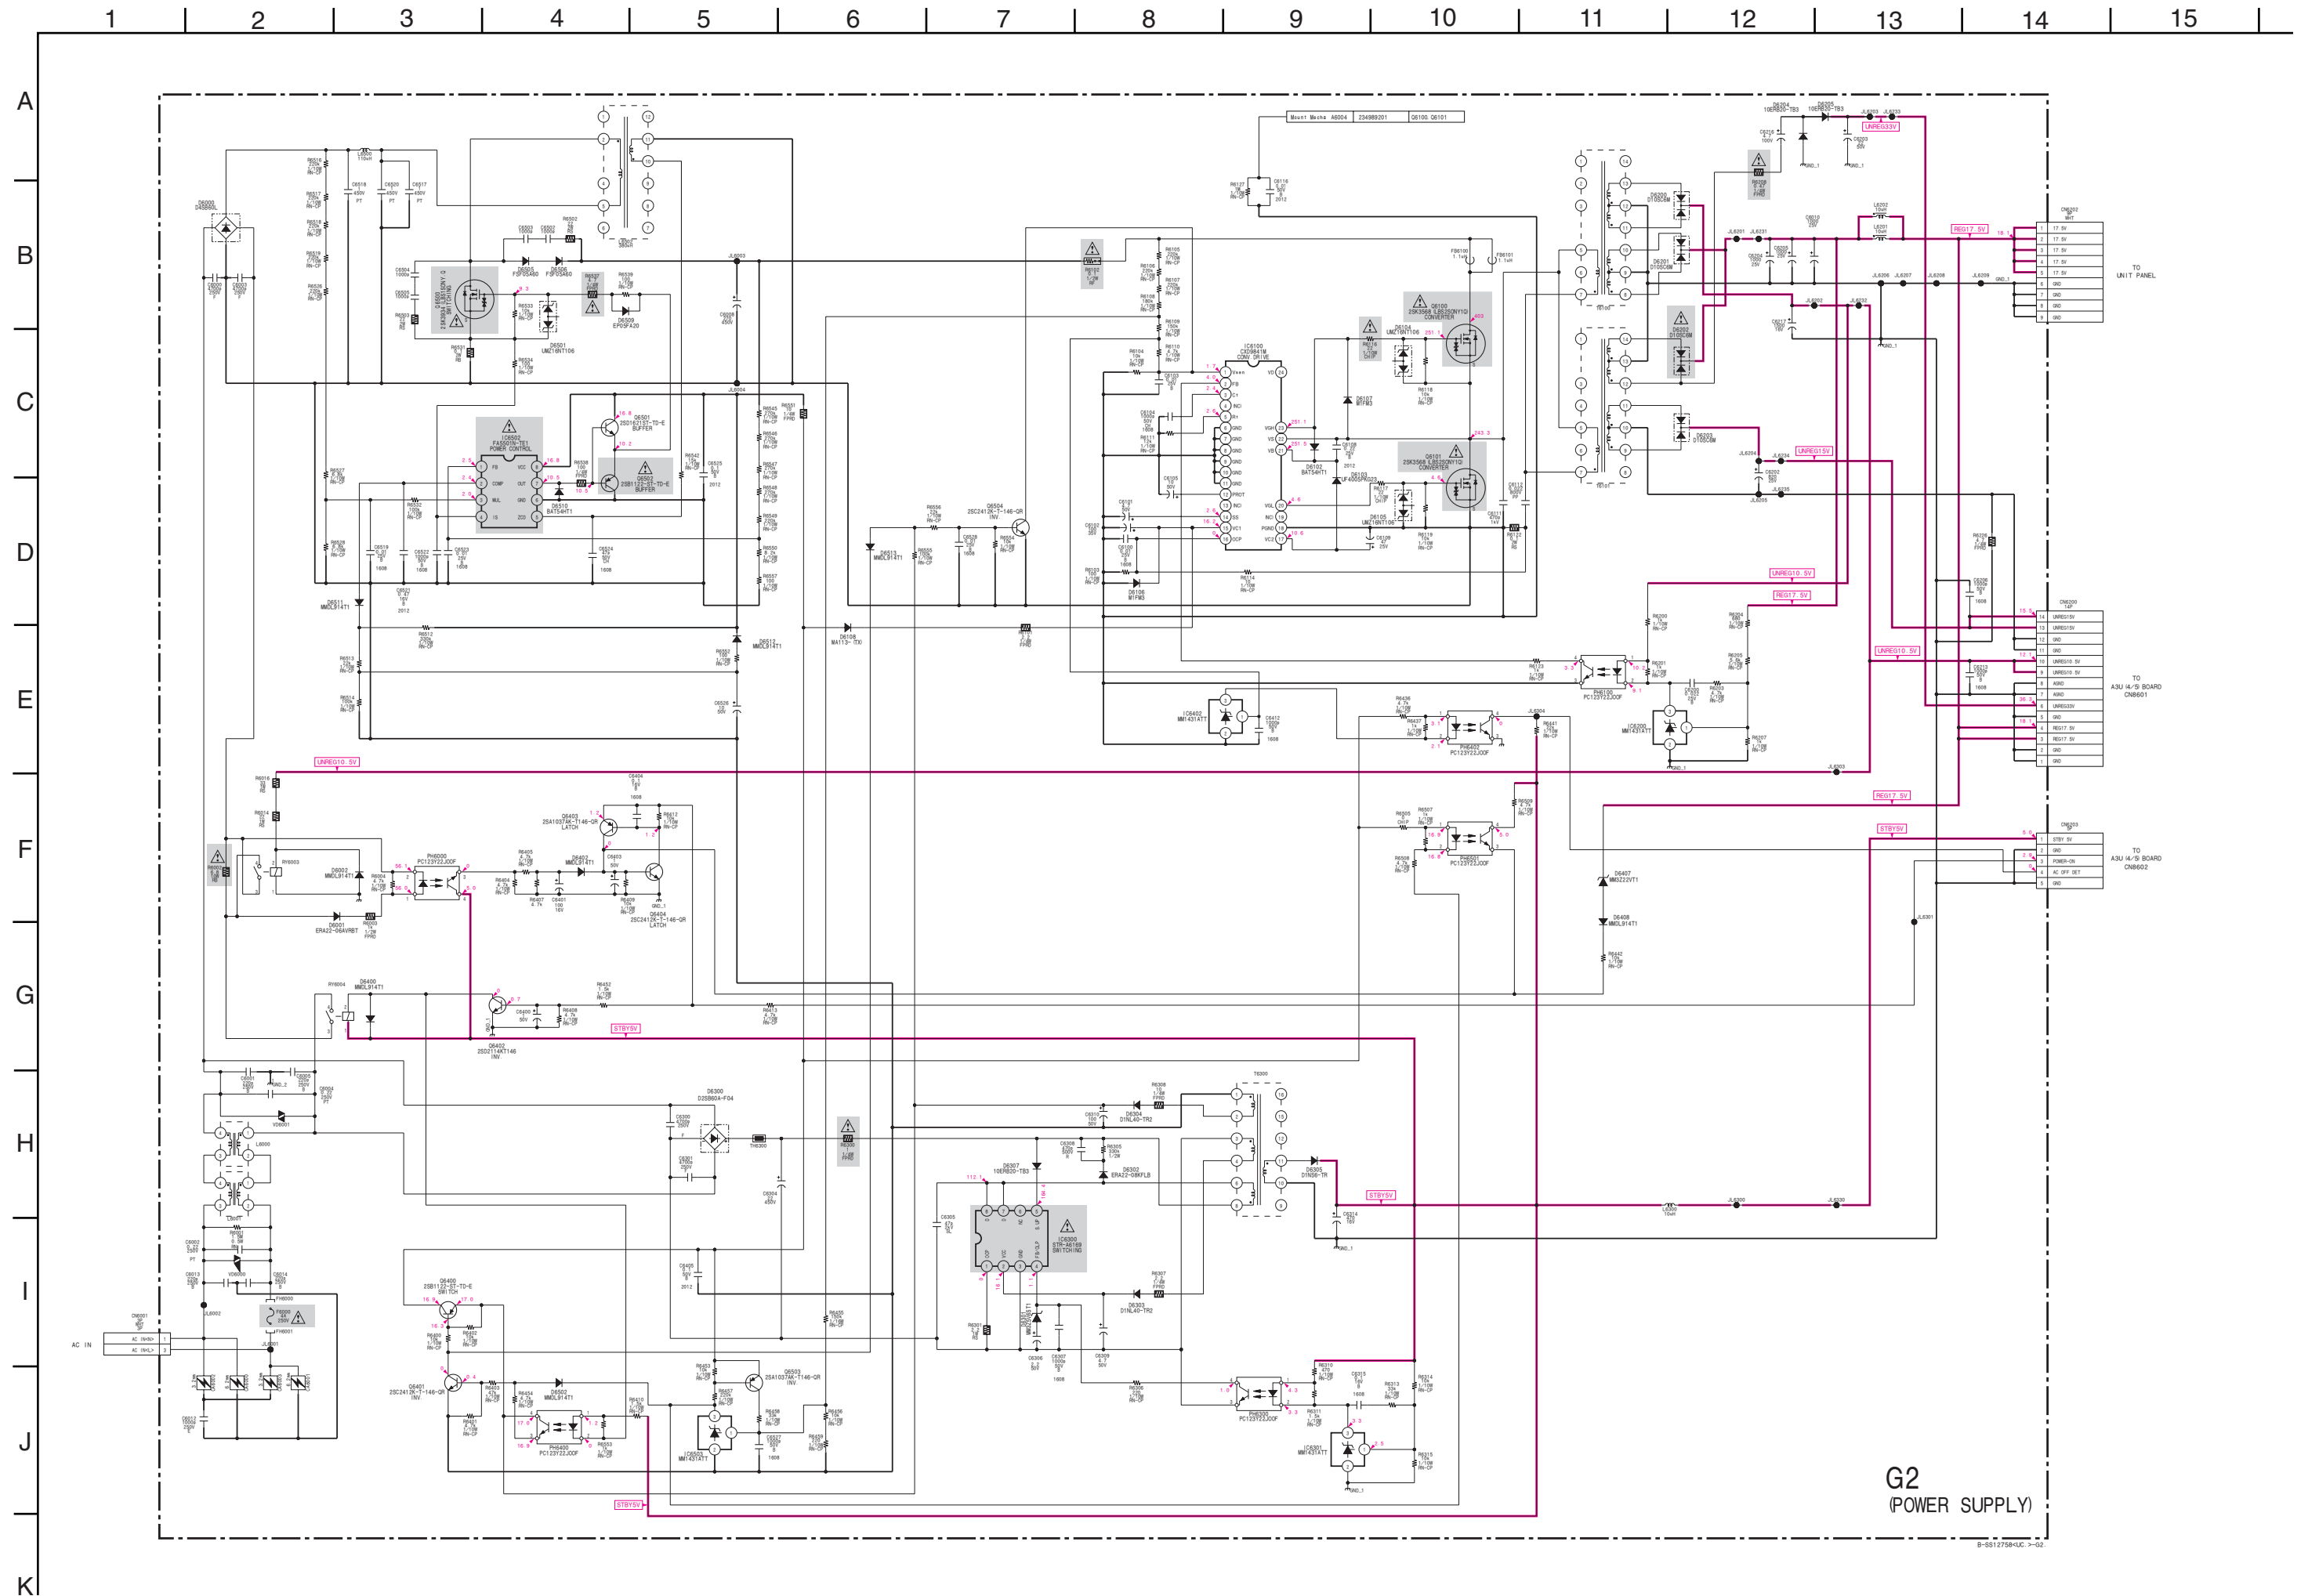

G2
(POWER SUPPLY)

B-88127584UC-3-02

— G2 BOARD —



<COMPONENT SIDE>




<CONDUCTOR SIDE>


• G2 BOARD SEMICONDUCTOR LOCATION

| IC | | | |
|------------------|------------------|-------|-------|
| (Component Side) | (Conductor Side) | | |
| IIC6100 | A-4 | D6103 | A-5 - |
| IC6200 | B-5 | D6104 | A-4 ⑪ |
| IC6300 | B-4 | D6105 | A-5 ⑪ |
| IC6301 | B-4 | D6106 | A-5 ⑨ |
| IC6402 | B-5 | D6107 | A-4 ③ |
| IC6502 | A-4 | D6108 | B-4 ③ |
| IC6503 | B-4 | D6200 | A-6 - |
| | | D6201 | B-6 - |
| | | D6203 | A-6 - |
| | | D6204 | A-6 - |
| | | D6205 | A-6 - |
| | | D6207 | B-6 - |
| | | D6210 | B-6 ③ |
| | | D6300 | B-2 - |
| | | D6301 | B-4 ③ |
| | | D6302 | B-4 - |
| | | D6303 | B-5 - |
| | | D6304 | B-5 - |
| | | D6305 | B-5 - |
| | | D6306 | B-5 ③ |
| | | D6307 | B-4 - |
| | | D6308 | B-5 - |
| | | D6400 | B-1 ③ |
| | | D6402 | B-3 ③ |
| | | D6405 | A-4 ③ |
| | | D6407 | B-6 ③ |
| | | D6408 | B-6 ③ |
| | | D6501 | B-3 ⑪ |
| | | D6502 | B-4 ③ |
| | | D6506 | A-3 - |
| | | D6507 | A-3 ③ |
| | | D6509 | B-4 ③ |
| | | D6510 | A-4 ③ |
| | | D6511 | A-4 ③ |
| | | D6512 | A-4 ④ |
| | | D6513 | B-4 ③ |
| TRANSISTOR | | | |
| (Component Side) | (Conductor Side) | * | |
| Q6100 | A-4 | - | |
| Q6101 | A-4 | - | |
| Q6400 | B-4 | - | |
| Q6401 | B-4 | ② | |
| Q6402 | B-3 | ② | |
| Q6403 | B-3 | ② | |
| Q6404 | B-3 | ② | |
| Q6500 | A-4 | - | |
| Q6501 | B-4 | - | |
| Q6502 | B-4 | - | |
| Q6503 | B-4 | ② | |
| Q6504 | A-4 | ② | |
| DIODE | | | |
| (Component Side) | (Conductor Side) | * | |
| D6000 | A-2 | - | |
| D6001 | B-2 | - | |
| D6002 | B-2 | ③ | |
| D6102 | A-4 | ③ | |

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-8)

(3) Schematic Diagrams of G3 Board (KLV-S40A10 ONLY)

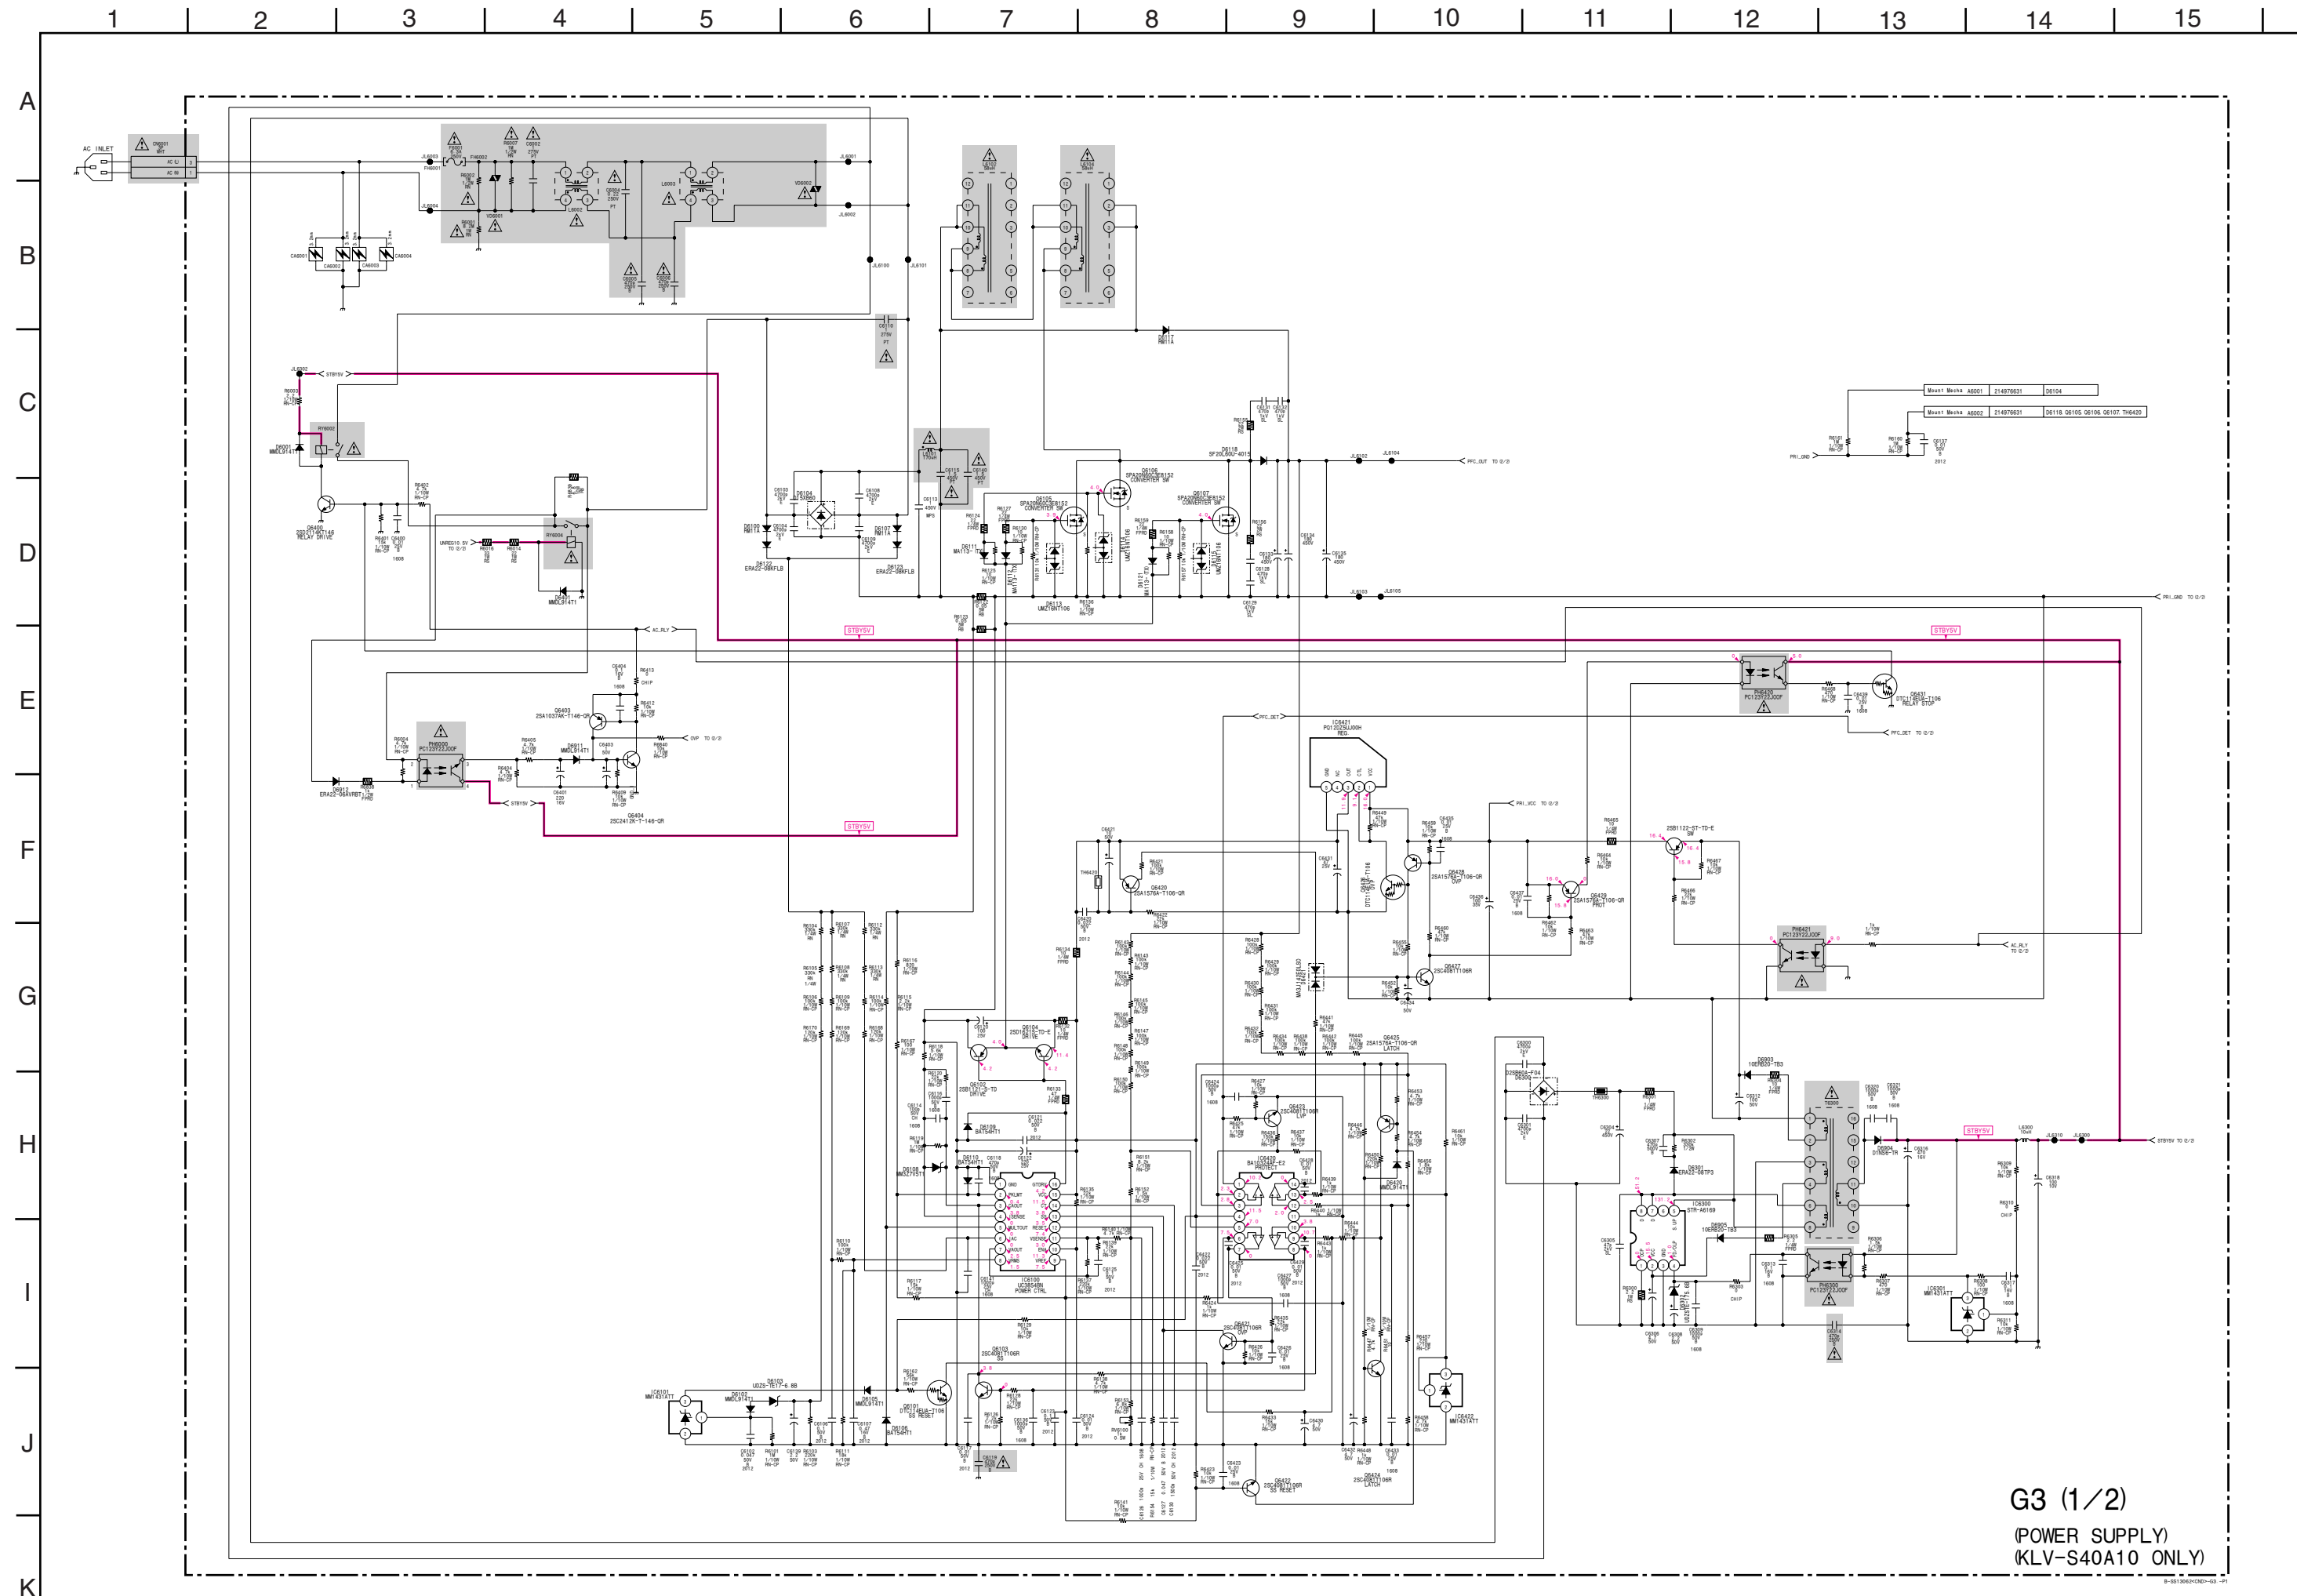







| IC | | | | DIODE | | | | | | | | | | | | | |
|------------------|-----|------------------|---|------------------|-----|------------------|-------|-------|-----|-----|-------|-------|-----|-------|-------|-----|-----|
| (Component Side) | | (Conductor Side) | | (Component Side) | | (Conductor Side) | | | | | | | | | | | |
| | | | | Q6106 | B-6 | - | | D6123 | D-7 | - | | D6605 | A-7 | ③ | | | |
| | | | | Q6107 | B-6 | - | | D6300 | E-3 | - | | D6700 | C-5 | ③ | | | |
| | | | | Q6400 | E-3 | - | | D6301 | E-2 | - | | D6701 | C-4 | ③ | | | |
| IC6000 | D-1 | | ② | D6403 | E-1 | ② | D6000 | D-1 | | ③ | D6302 | D-6 | ③ | D6702 | C-4 | ③ | |
| IC6100 | B-6 | | | Q6404 | | ① | D6001 | | E-5 | ③ | D6306 | E-6 | ③ | D6703 | C-5 | ③ | |
| IC6101 | A-6 | | | Q6420 | B-3 | ① | D6002 | C-1 | | ③ | D6401 | E-4 | ③ | D6704 | C-4 | - | |
| IC6300 | E-2 | | | Q6421 | B-2 | ① | D6004 | C-1 | | ③ | D6420 | B-5 | ③ | D6705 | C-4 | - | |
| IC6301 | D-1 | | | Q6422 | B-3 | ① | D6100 | D-5 | | - | D6421 | D-3 | 9 | D6706 | D-4 | ⑩ | |
| IC6420 | B-5 | | | Q6423 | B-3 | ① | D6101 | | A-2 | ③ | D6422 | | C-6 | ③ | D6707 | D-4 | ⑩ |
| IC6421 | D-3 | | | Q6424 | B-3 | ① | D6102 | | A-2 | ③ | D6423 | | C-6 | ③ | D6709 | C-3 | - |
| IC6422 | B-5 | | | Q6425 | B-3 | ① | D6103 | | A-2 | ③ | D6474 | | D-7 | ③ | D6710 | C-4 | ③ |
| IC6500 | A-4 | | | Q6426 | D-5 | ① | D6104 | D-6 | | - | D6475 | | D-7 | ④ | D6711 | C-4 | ③ |
| IC6600 | A-2 | | | Q6427 | D-5 | ① | D6105 | | A-2 | ③ | D6500 | A-4 | ③ | D6712 | C-4 | ③ | |
| IC6700 | C-4 | | | Q6428 | D-5 | ① | D6106 | | B-2 | ③ | D6501 | | A-4 | ③ | D6713 | | C-4 |
| IC6800 | C-2 | | | Q6429 | D-3 | ② | D6107 | D-7 | | - | D6502 | A-4 | ③ | D6800 | | D-7 | |
| | | | | Q6430 | D-3 | - | D6108 | | B-2 | ③ | D6503 | A-4 | - | D6803 | D-1 | - | |
| | | | | Q6431 | | D-5 | ① | D6109 | | B-2 | ④ | D6504 | B-4 | ③ | D6804 | C-1 | ③ |
| | | | | Q6432 | B-3 | ② | D6110 | | B-2 | ③ | D6505 | B-4 | ⑩ | D6805 | D-1 | - | |
| | | | | Q6433 | B-4 | ② | D6111 | B-6 | | ③ | D6506 | B-4 | ③ | D6806 | B-2 | - | |
| | | | | Q6434 | B-4 | ② | D6112 | B-6 | | ③ | D6507 | B-4 | ③ | D6807 | C-2 | - | |
| Q6001 | D-1 | | ② | Q6500 | B-4 | - | D6113 | B-5 | | ⑩ | D6508 | A-4 | ③ | D6808 | D-1 | - | |
| Q6002 | C-1 | | ② | Q6501 | B-4 | - | D6114 | B-6 | | ⑩ | D6509 | | A-4 | ③ | D6903 | E-2 | - |
| Q6101 | | B-2 | ① | Q6700 | D-4 | - | D6115 | B-6 | | ⑩ | D6600 | A-1 | - | D6904 | E-1 | - | |
| Q6102 | B-6 | | - | Q6701 | D-4 | - | D6117 | D-7 | | - | D6601 | A-2 | - | D6905 | E-2 | - | |
| Q6103 | B-5 | | ② | Q6800 | E-1 | - | D6118 | B-7 | | - | D6602 | A-1 | - | D6911 | | E-7 | |
| Q6104 | B-6 | | - | | | | D6121 | B-7 | | ③ | D6603 | A-2 | - | D6912 | E-4 | - | |
| Q6105 | B-5 | | - | | | | D6122 | D-5 | | - | D6604 | | A-7 | ③ | | | |

KLV-S26/S32/S40A10 (UC/WB/CND/MX) 4-19


(4) Schematic Diagram of H1 and H2 Boards

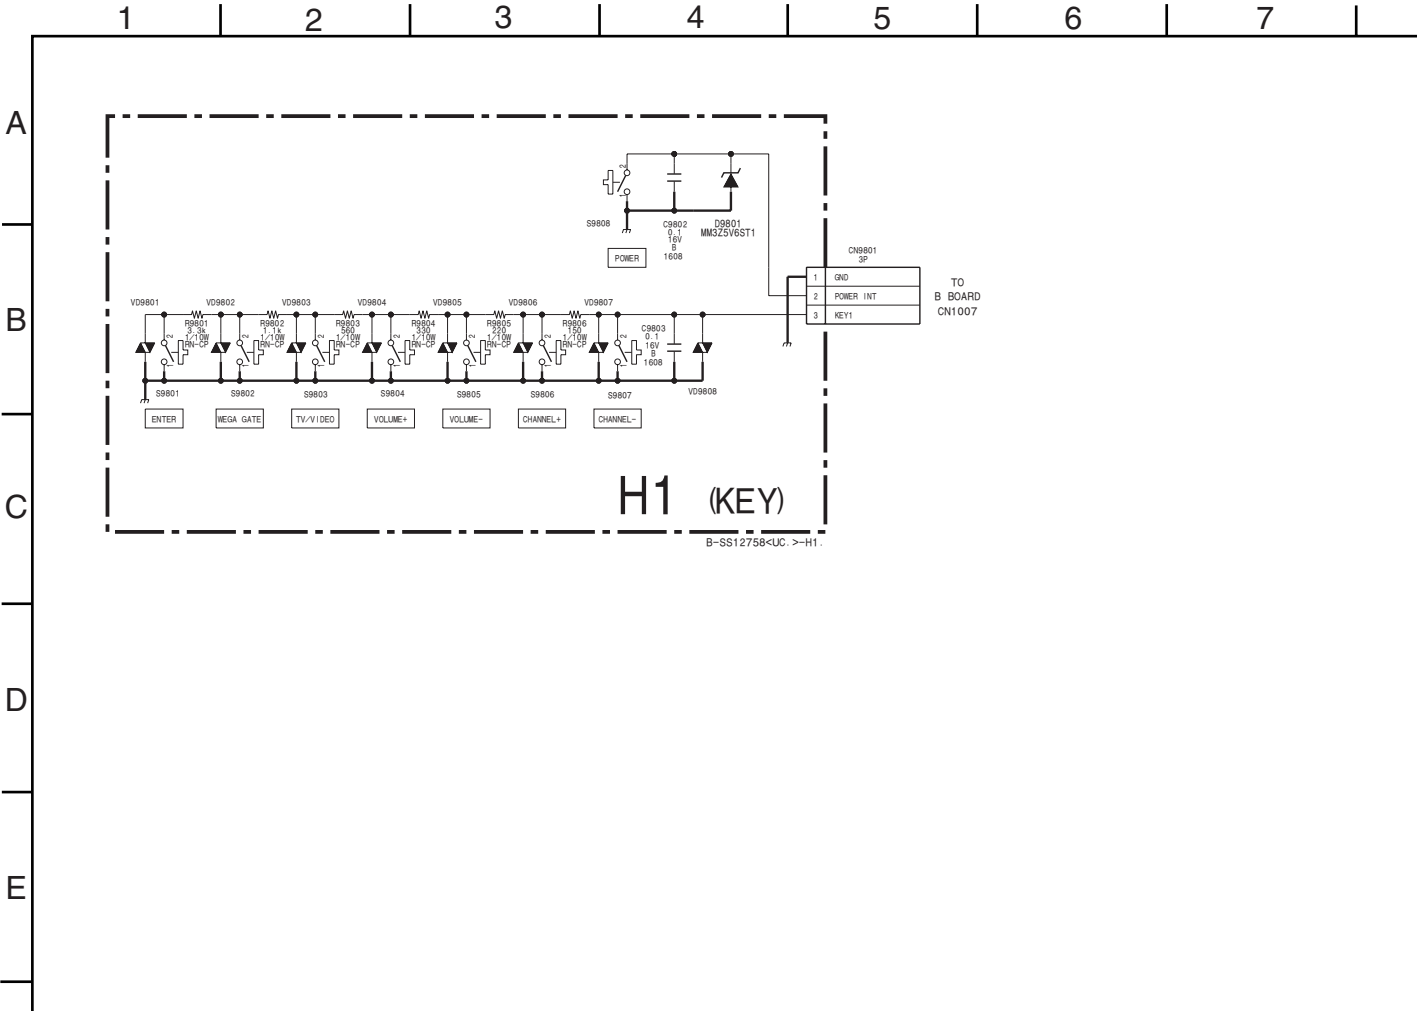

H1 [KEY]
— H1 BOARD —

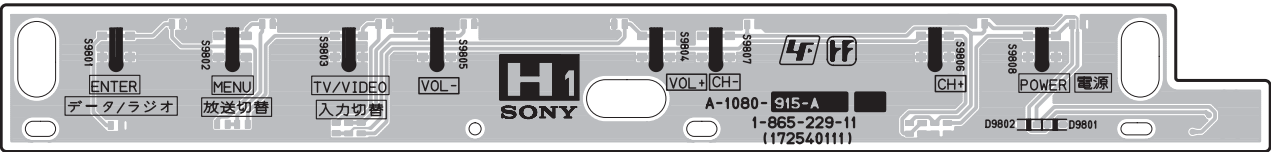

<COMPONENT SIDE>

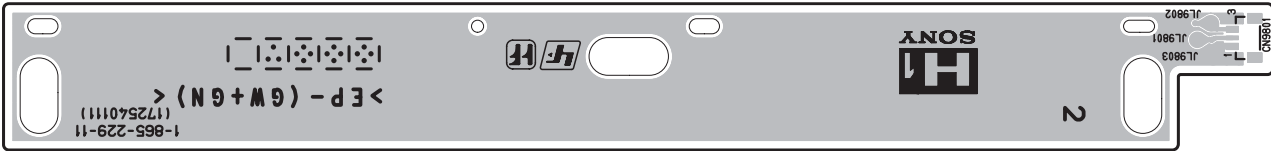


<CONDUCTOR SIDE>


• H1 BOARD SEMICONDUCTOR LOCATION

| Ref. | * |
|-------|---|
| D9801 | ③ |


※: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-8)

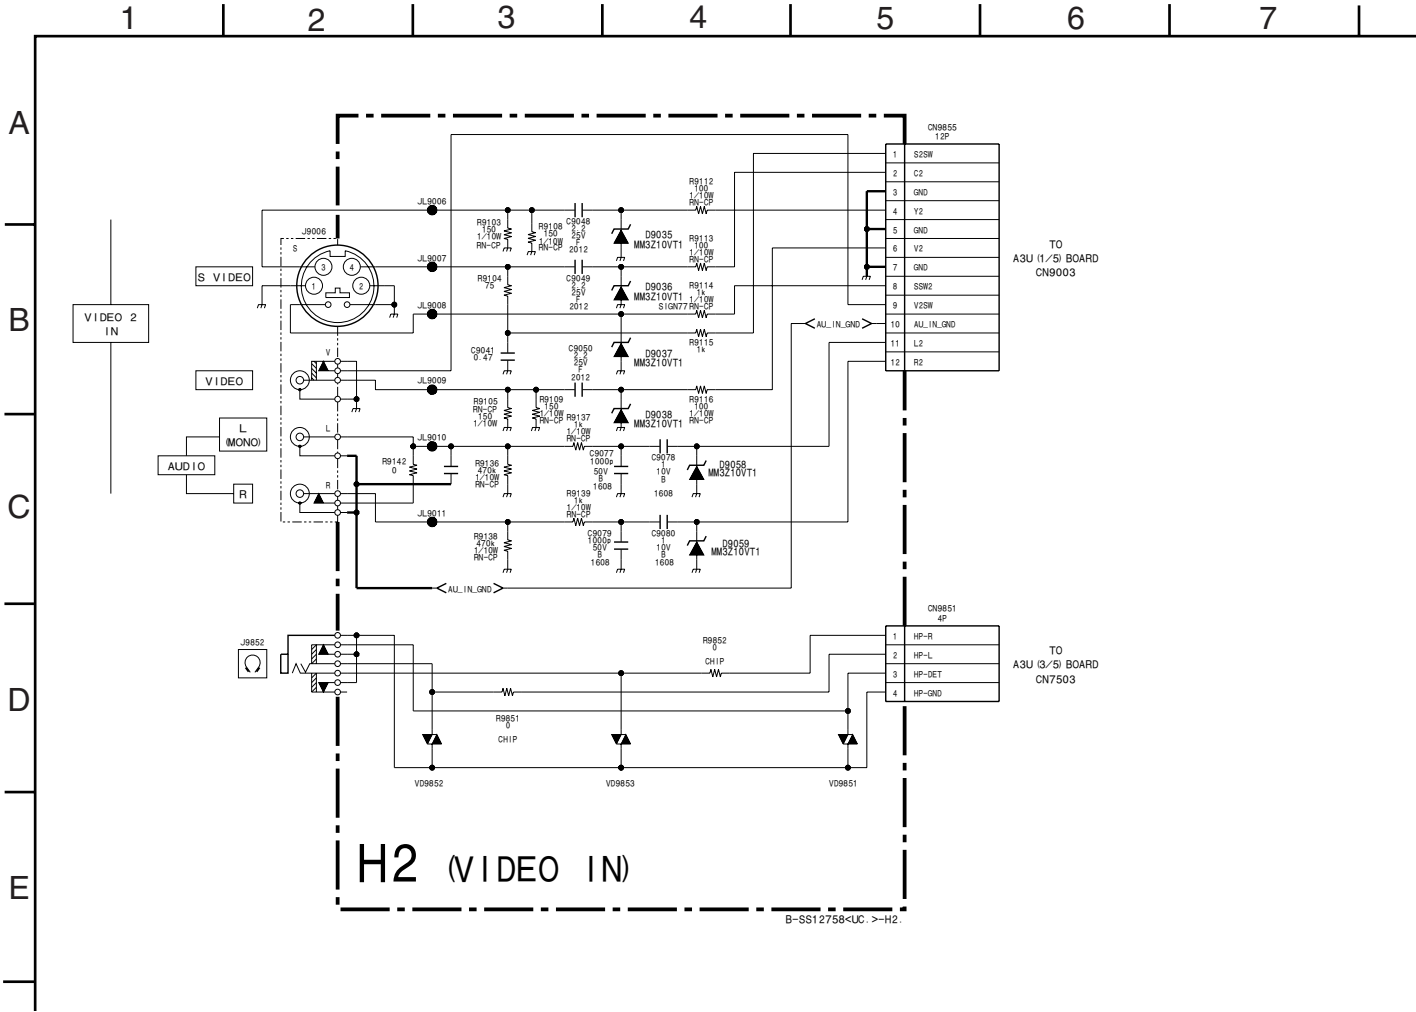

H2 [VIDEO IN]
— H2 BOARD —

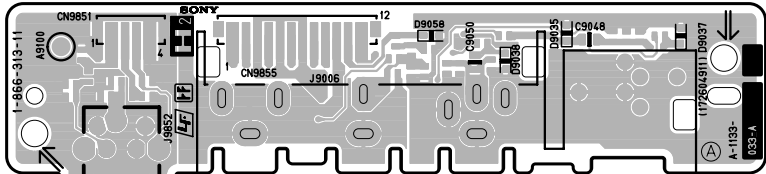

<COMPONENT SIDE>

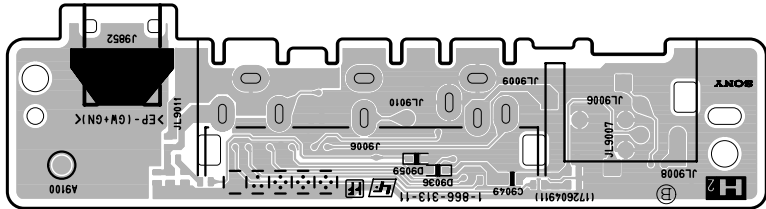


<CONDUCTOR SIDE>

• H2 BOARD SEMICONDUCTOR LOCATION


| Ref. | * |
|---------------------------|---|
| D9035-D9038, D9058, D9059 | ③ |

※: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-8)


(5) Schematic Diagram of H3 Board

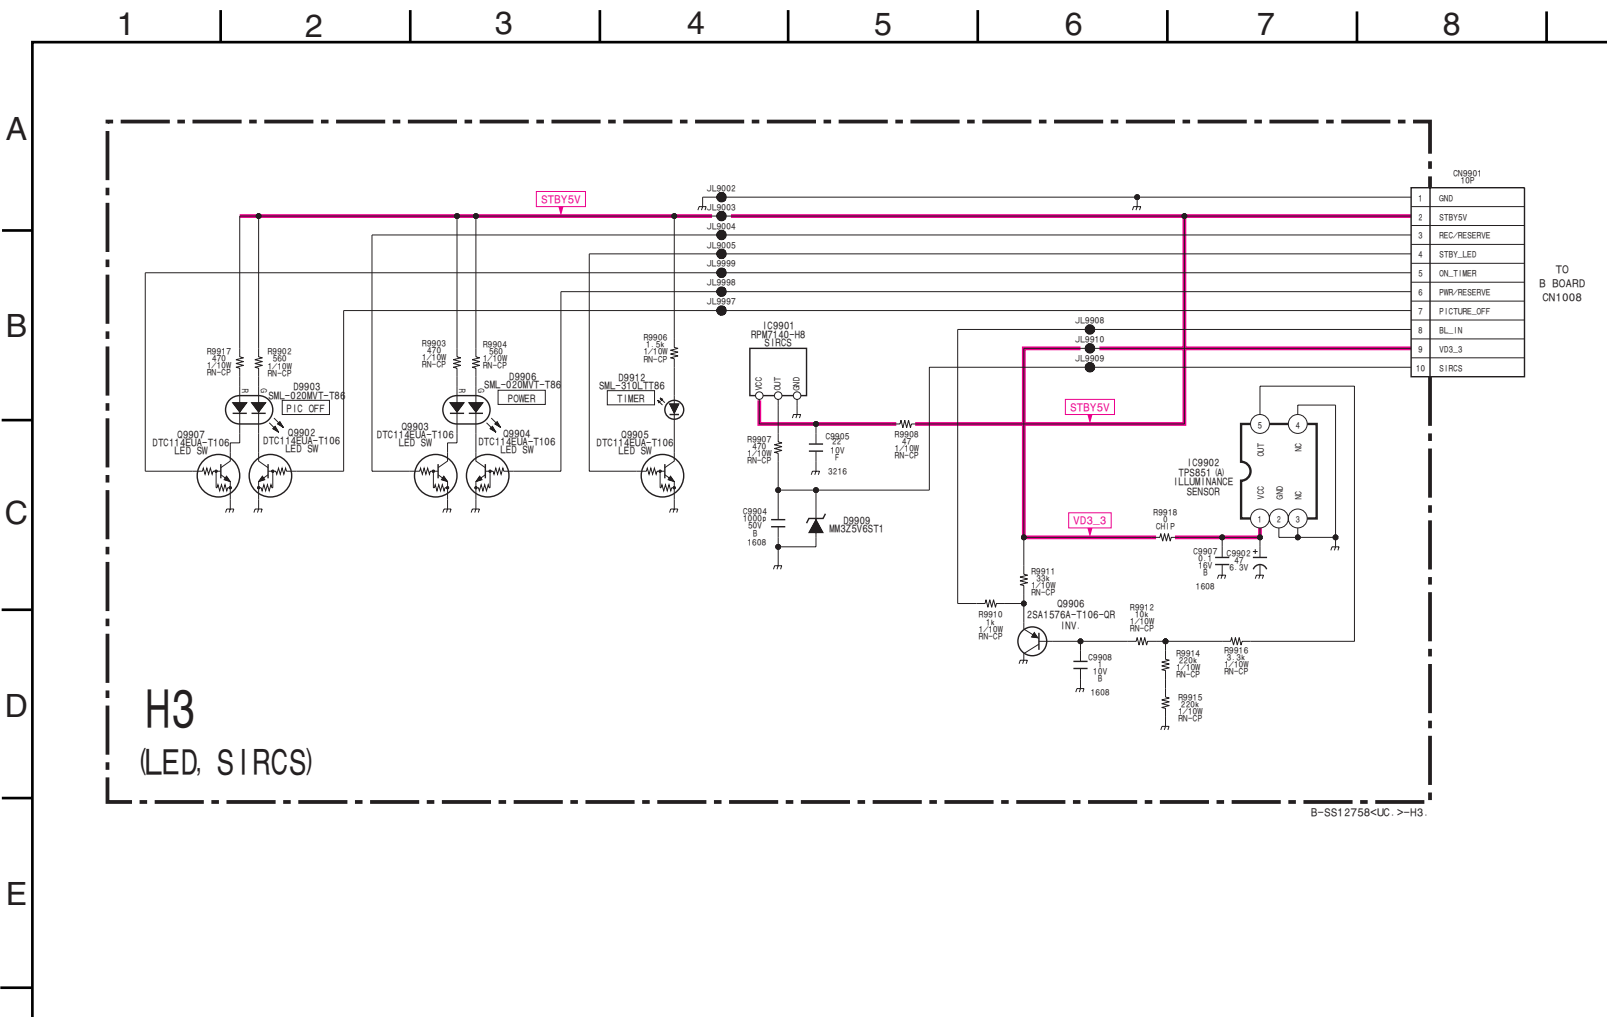

H3 [SIRCS, LED]
— H3 BOARD —

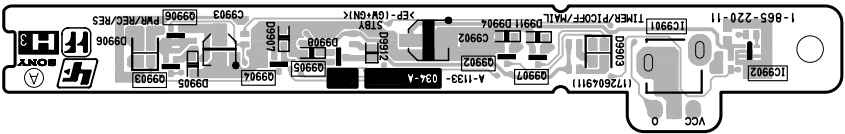

<COMPONENT SIDE>

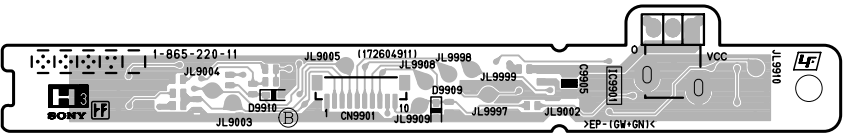


<CONDUCTOR SIDE>

• H3 BOARD SEMICONDUCTOR LOCATION


| Ref. | * |
|--------------|---|
| Q9902-Q9907 | ② |
| D9903, D9906 | - |
| D9909, D9912 | ③ |

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-8)


(6) Schematic Diagram of TU Board

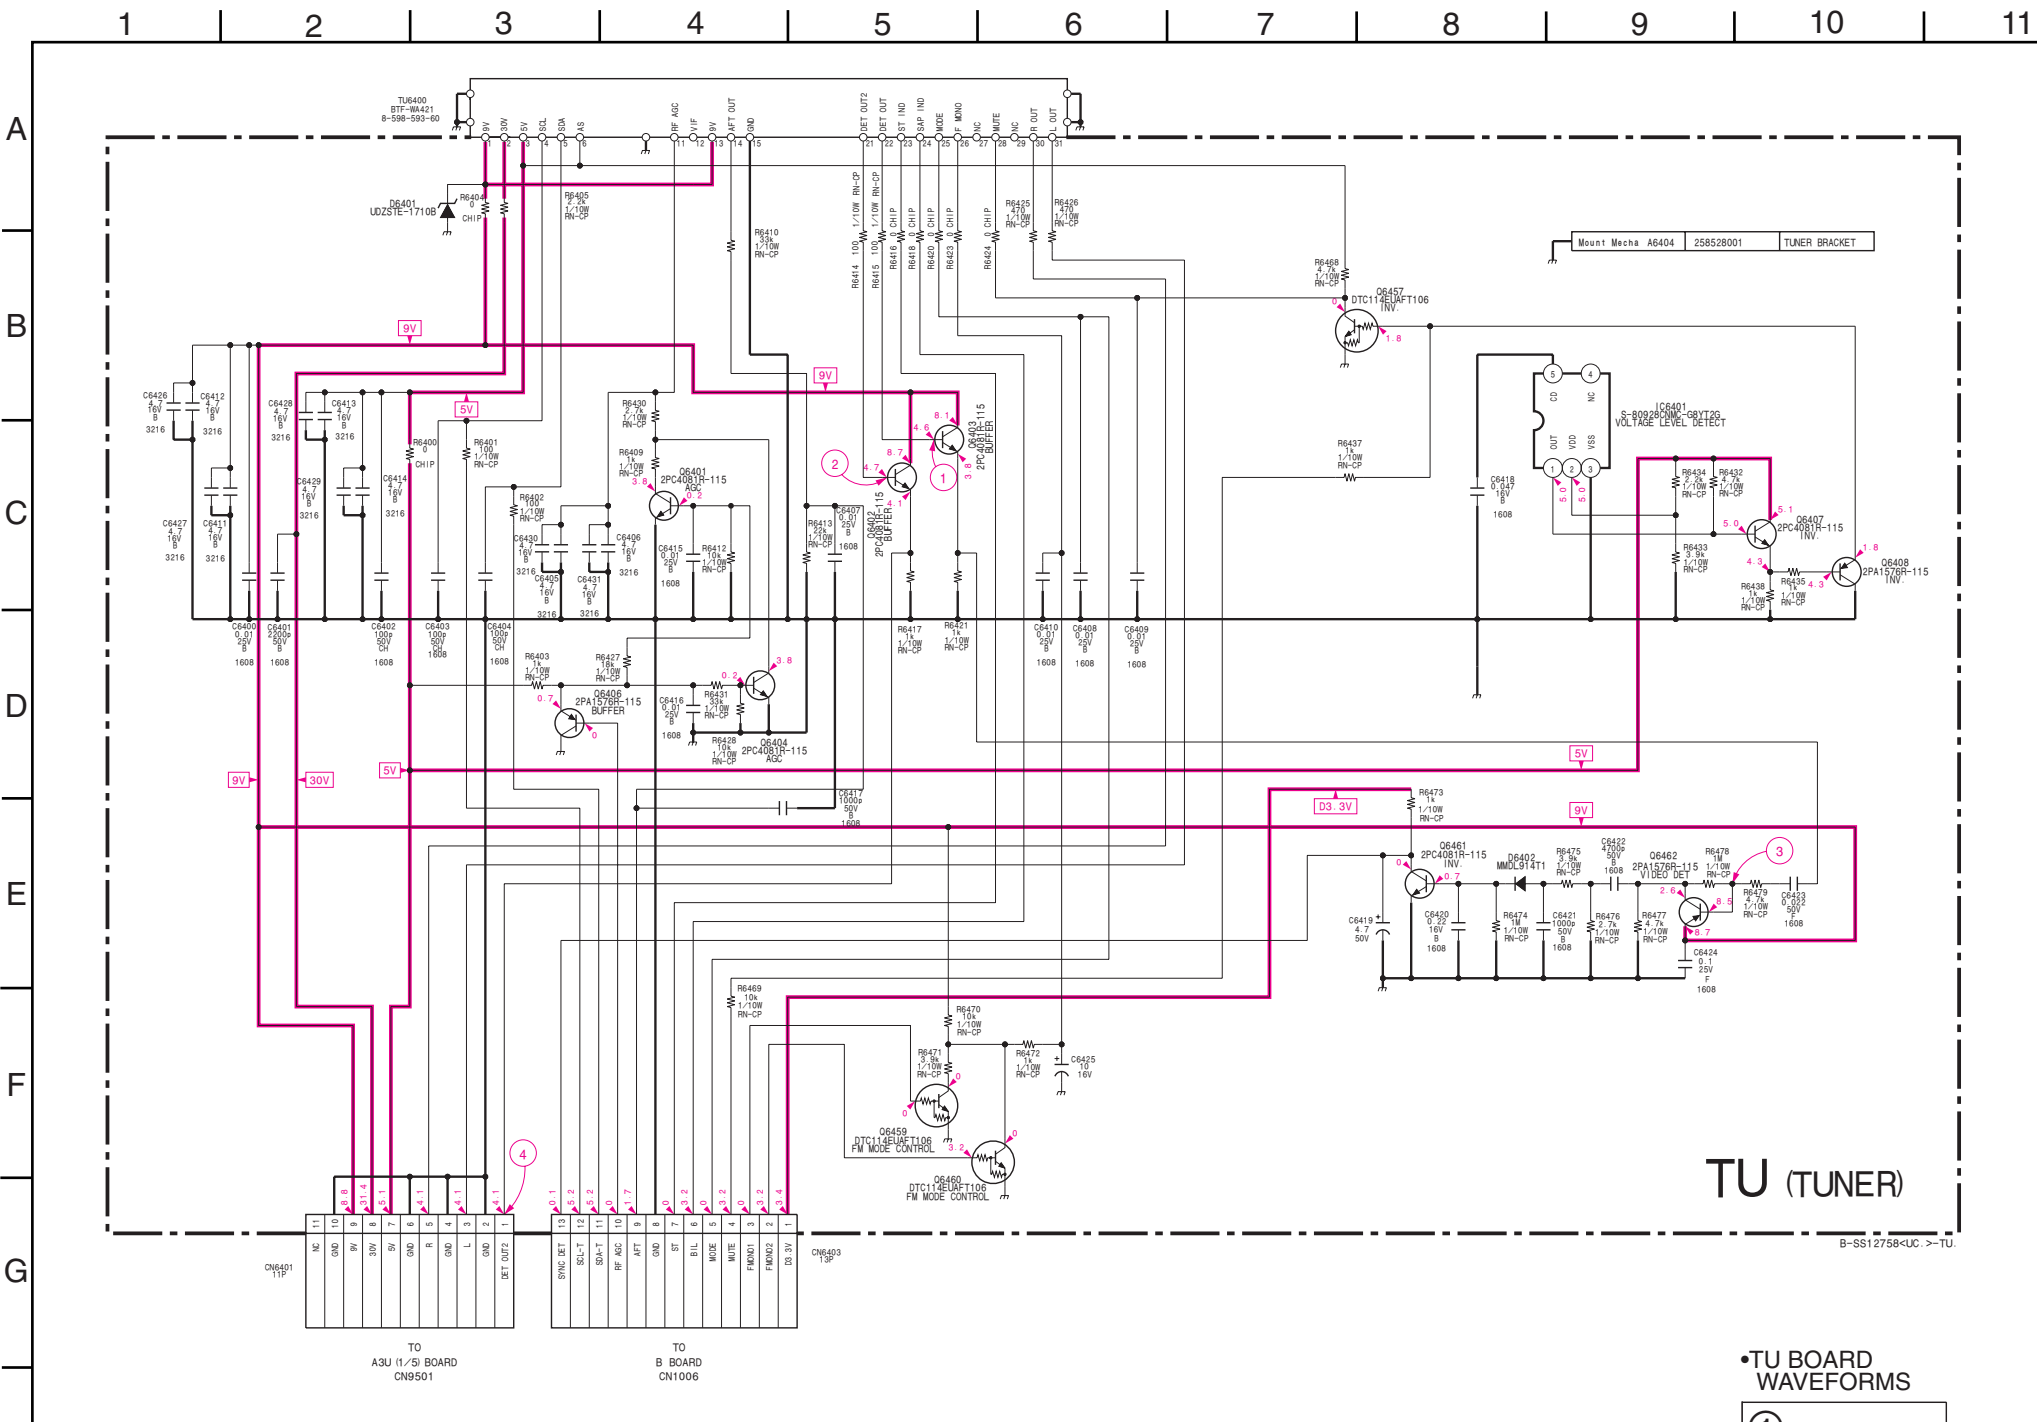


• TU BOARD WAVEFORMS

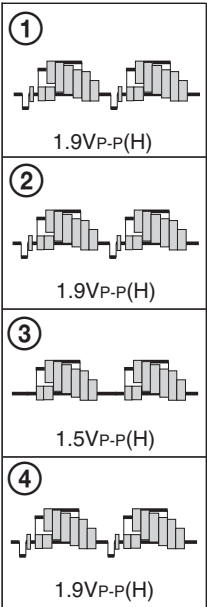

TU [TUNER]
— TU BOARD —

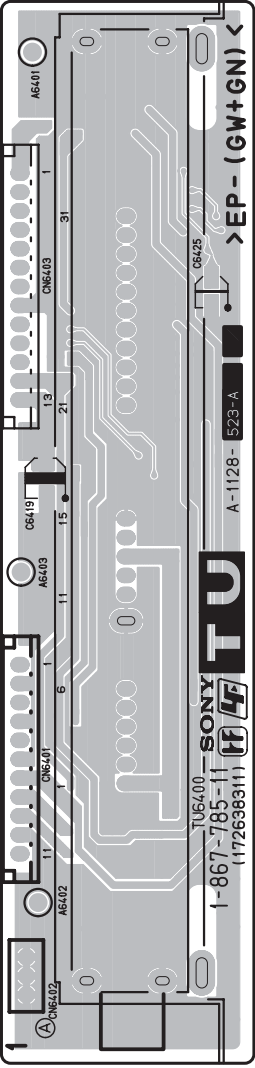

<COMPONENT SIDE>

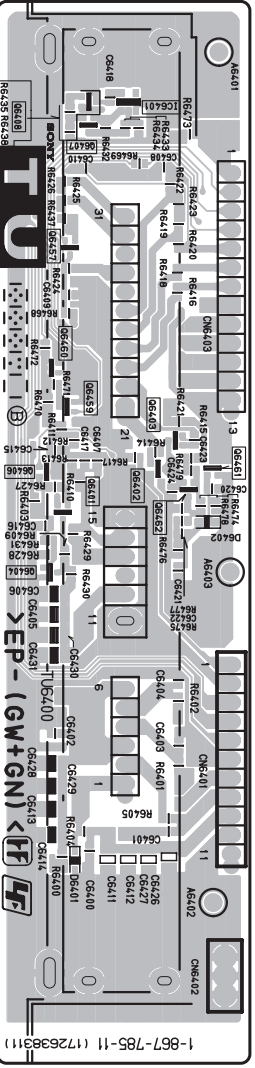

<CONDUCTOR SIDE>

• TU BOARD SEMICONDUCTOR LOCATION


| Ref. | * |
|---|---|
| Q6401-Q6404, Q6406-Q6408, Q6457, Q6459-Q6462 | ② |
| D6401, D6402 | ③ |

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-8)


4-5. SEMICONDUCTORS

IC

BA00AST-V5




BA05FP-E2
BA09FP-E2
S-1111B33MC-NYSTFG
S-80928CNMC-G8YT2G
TC7SZ125FU(TE85R)




5Pin CHIP


BA18BC0FP-E2
BA25BC0FP-E2



BA3823LS




BR24L02F-WE2
CS4335-KSZR
FA5501N-TE1
LM75CIMX-3
M24128-BWMN6T(A)
M24C02-WMN6T(B)
NJM2521V(TE2)
NJM3414AV(TE2)
NJM4558V-TE2
RC4558DR
RC4558PWR




8Pin SOP

CD4052BNSR
FMS6418AM16X




16Pin SOP

CXA2188Q-T4




40Pin QFP

CXA2209Q-T6




80Pin QFP

EM6A9320BI-5MG




144Pin PGA

HD6433692B15FXV
HD64F3694FXV-P1
TPA3004D2PHPR




48Pin QFP

HD64F2378-12681-06




144Pin QFP

L88M05T-FA-TL



M52347FP-TE




20Pin SOP


MM1431ATT




NJW1149AFH1




PQ1CY1032ZP



PQ1CZ41H2ZPH




RV5C387A-E2-FB




10Pin SOP

SI9993CTG100



100Pin QFP

SN74LV132APWR
SN74LVC14APWR



14Pin SOP


STR-A6169




8Pin DIP

TRANSISTOR


DTC114EU
DTC114EUAFT106




DTC114EUA-T106
DTC115EUA-T106
DTC144WKA-T146
DTC314TK-T-146
DTC323TK
DTC323TKT146
MUN2211T1
MUN2212T1
MUN5213T1
PDTC114EK-115
UN2211
2PA1576R-115
2PC4081R-115
2PD601AR-115
2SA1037AK-T146-QR
2SA1037AK-T146-R
2SA1576A-T106-QR
2SA1774R
2SA1774TL-QR
2SC1623-L5L6
2SC2412K-T-146-QR
2SC4081-R
2SC4081T106R
2SC4617R
2SC4617TL-QR
2SD2114K
2SD601A-Q-TX




FDS6690A




HN1B01FU-TE85R




SSM6N15FU(TE85R)




2SB1122-S
2SB1122-ST-TD-E
2SD1621-ST
2SD1621ST-TD-E



2SD2114KT146




2SK2158-T2B




DIODE

BAS316-115
EP05FA20
MM3Z10VT1
MM3Z18VST1
MM3Z22VT1
MM3Z2V4T1
MM3Z5V6ST1
MM3Z6V2ST1
MM3Z6V8ST1
MM3Z8V2ST1




BAT54HT1
DTZ10B
HZU5.6GTRF
MA113-(TX)
MMDL914T1
RD5.6SB-T1
UDZSTE-1716B
UDZ-TE-17-18B
UDZ-TE-17-6.2B
UDZ-TE-17-6.8B




D10SC6M




D1NL40-TA2
D1NL40-TR2
ERA22-08




D1NS6
D1NS6-TR
ERA22-06AVRBT
UF4005/23
10ERB20-TB3




D2SB60A-F04
D4SB60L




EC10QS-04
EC10QS04-TE12L5




EC21QS03L-TE12L
P6SMBJ30A-5
PTZ-TE25-3.9B




ERA22-08KFLB




FSF05A60




HN1D03FU-TE85L
HN1D03FU-TE85R




M1FM3




MA132WK
MA132WK-TX
MA151WK-TX
1SS184




UDZSTE-1710B




UMZ16NT106




1PS302



SML-020MVT-T86




SML-310LTT86




SECTION 5

EXPLODED VIEWS

NOTE:

The components identified  marked are critical for safety.
Replace only with the part number specified.


Les composants identifiés par la marque  sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

Note: Illustrations are created based on KLV-S26A10.

5-1. KLV-S26A10/S32A10

5-1-1. REAR CABINET ASSY AND STAND ASSY

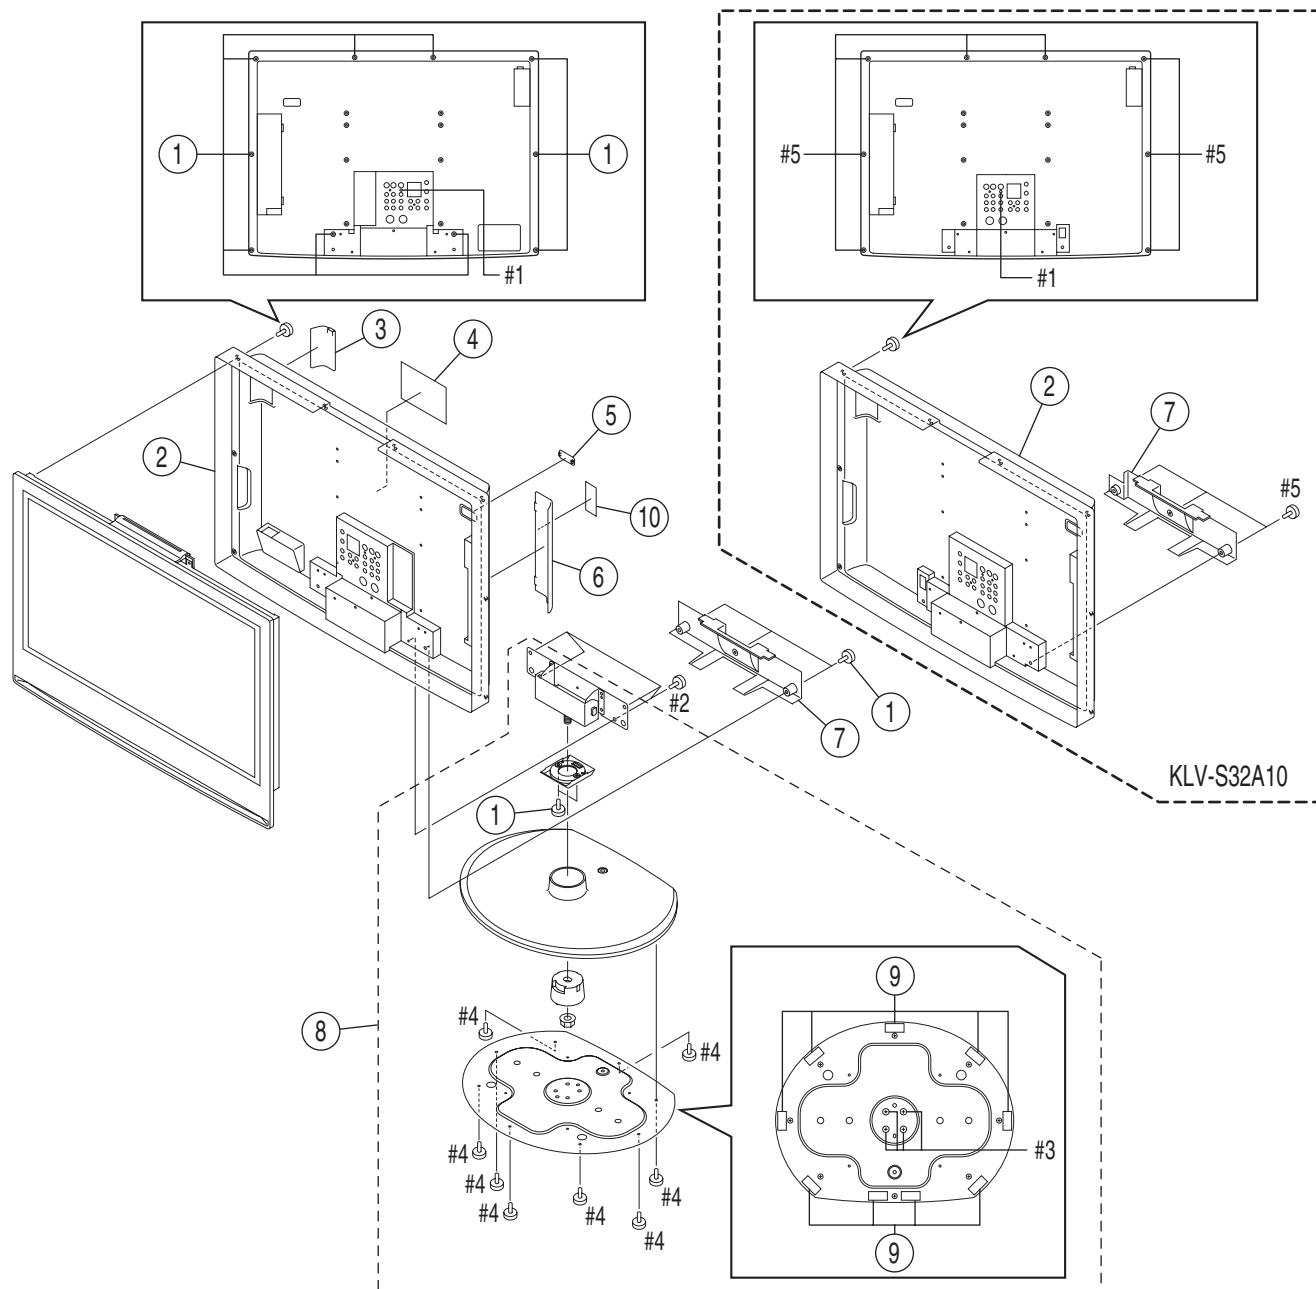


| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|---|------|
| 1 | 2-320-333-01 | SCREW +B M4X6 | |
| 2 | X-2059-356-2 | CABINET REAR ASSY (26U) (KLV-S26A10) | |
| | X-2067-143-1 | CABINET REAR ASSY (32U) (KLV-S32A10) | |
| 3 | 2-629-170-01 | COVER SIDE | |
| 4 | * 2-548-454-21 | LABEL, INFORMATION (U) (KLV-S26A10) (made in Japan) | |
| | * 2-548-454-31 | LABEL, INFORMATION (U) ((KLV-S32A10) (UC)) (made in Japan) | |
| | * 2-649-344-01 | LABEL, INFORMATION ((KLV-S32A10) (WB)) | |
| | * 2-651-085-01 | LABEL, INFORMATION ((KLV-S32A10) (UC)) (made in USA) | |
| | * 2-652-115-01 | LABEL, INFORMATION (KLV-S26A10) (made in USA) | |
| 5 | X-2055-564-2 | ECS COVER ASSY | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|--|------|
| 6 | X-2055-565-1 | JACK COVER (S) ASSY (KLV-S26A10) | |
| | X-2055-566-1 | JACK COVER (L) ASSY (KLV-S32A10) | |
| 7 | X-2055-757-1 | COVER, HINGE (26) ASSY (KLV-S26A10) | |
| | 2-549-470-01 | COVER, HINGE (32) ASSY (KLV-S32A10) | |
| 8 | X-2067-704-1 | STAND ASSY (L) | 9 |
| 9 | 4-100-951-11 | FOOT, STAND | |
| 10 | 2-650-129-11 | LABEL, JC (EXCEPT KLV-S32A10 (UC)) | |
| #1 | 7-685-647-79 | SCREW +BVTP 3X10 TYPE2 IT-3 | |
| #2 | 7-682-973-49 | SCREW +PSW 5X16 | |
| #3 | 7-682-973-39 | SCREW +PSW 5X14 | |
| #4 | 7-685-246-19 | SCREW +KTP 3X8 TYPE2 NON-SLIT | |
| #5 | 7-682-962-09 | SCREW +PSW 4X10 | |

KLV-S26A10/S32A10

5-1-2. CHASSIS-1

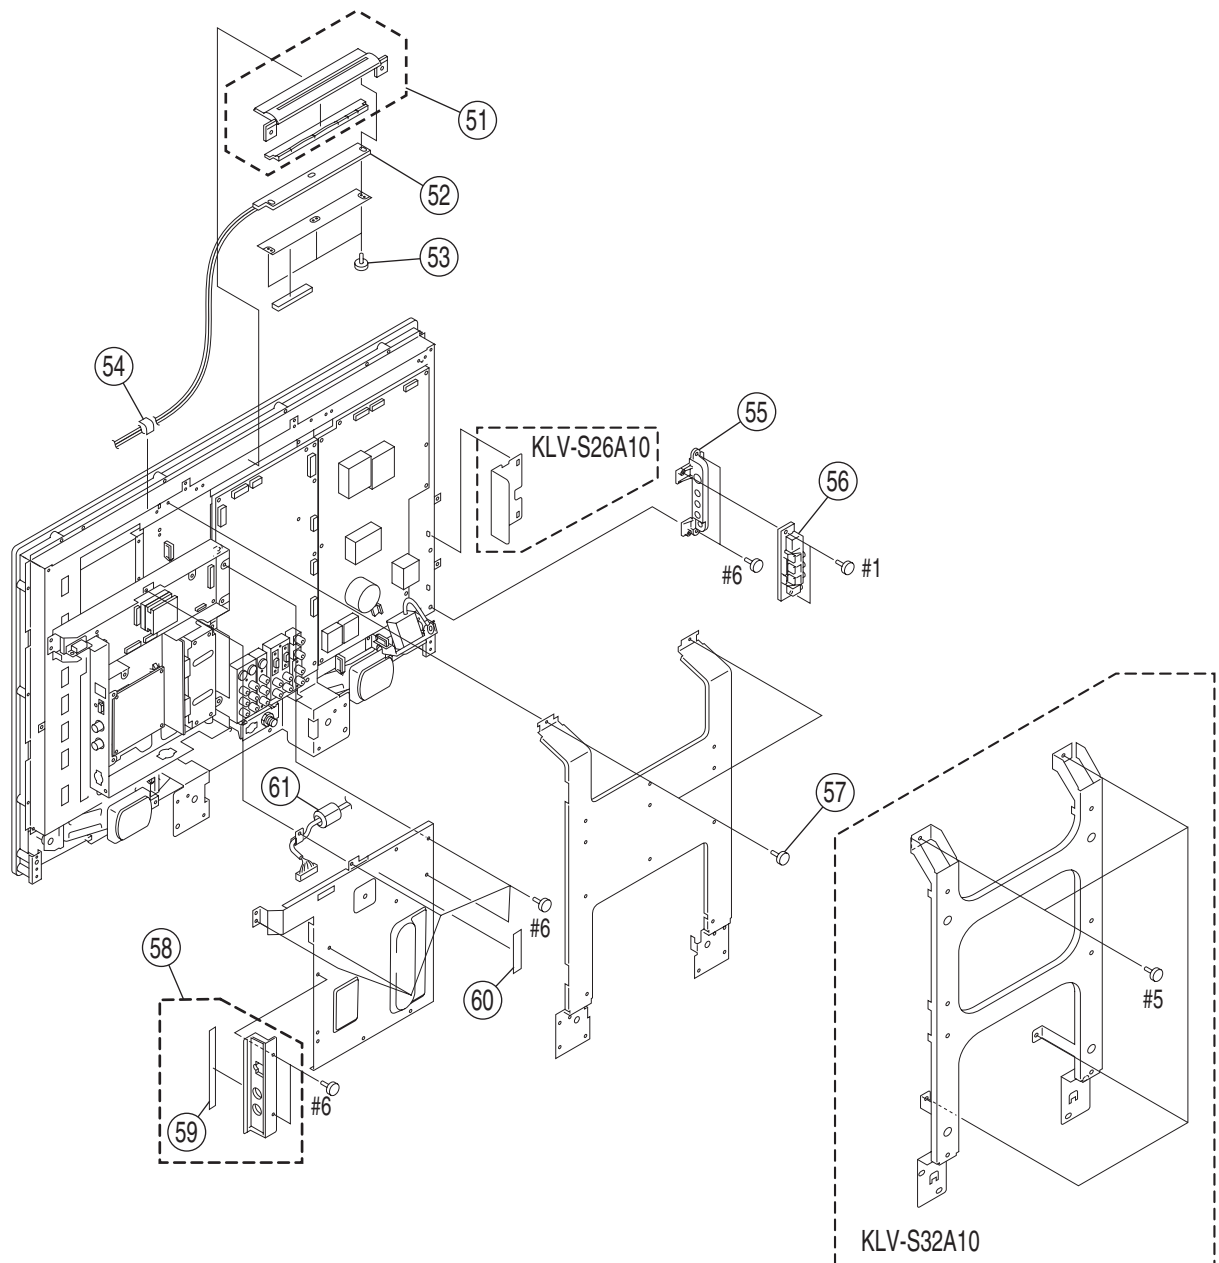


| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|--|------|
| 51 | X-2059-386-1 | ASSY, BUTTON MULTI (26U) (KLV-S26A10) | |
| | X-2059-387-1 | BUTTON, MULTI ASSY (32U) (KLV-S32A10) | |
| 52 | * A-1080-915-A | H1 MOUNT | |
| 53 | 4-908-792-41 | SCREW (B2) | |
| 54 | 4-660-752-01 | TAPE (LCD) | |
| 55 | X-2050-882-2 | HOLDER SIDE JACK ASSY | |
| 56 | * A-1133-033-A | H2 MOUNT | |
| 57 | 2-320-333-01 | SCREW +B M4X6 | |
| 58 | X-2055-266-2 | BRACKET SIDE ASSY (U) | 59 |
| 59 | 4-099-816-11 | TAPE (SP C2) | |
| 60 | * 4-091-096-02 | GASKET (D) (KLV-S26A10) (made in Japan) | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|------------------------------|------|
| 61 | 1-469-778-11 | CLAMP, FERRITE | |
| #1 | 7-685-647-79 | SCREW +BVTP 3X10 TYPE2 IT-3 | |
| #5 | 7-682-962-09 | SCREW +PSW 4X10 (KLV-S32A10) | |
| #6 | 7-685-871-01 | SCREW +BVTT 3X6 (S) | |

KLV-S26A10/S32A10

5-1-3. CHASSIS-2

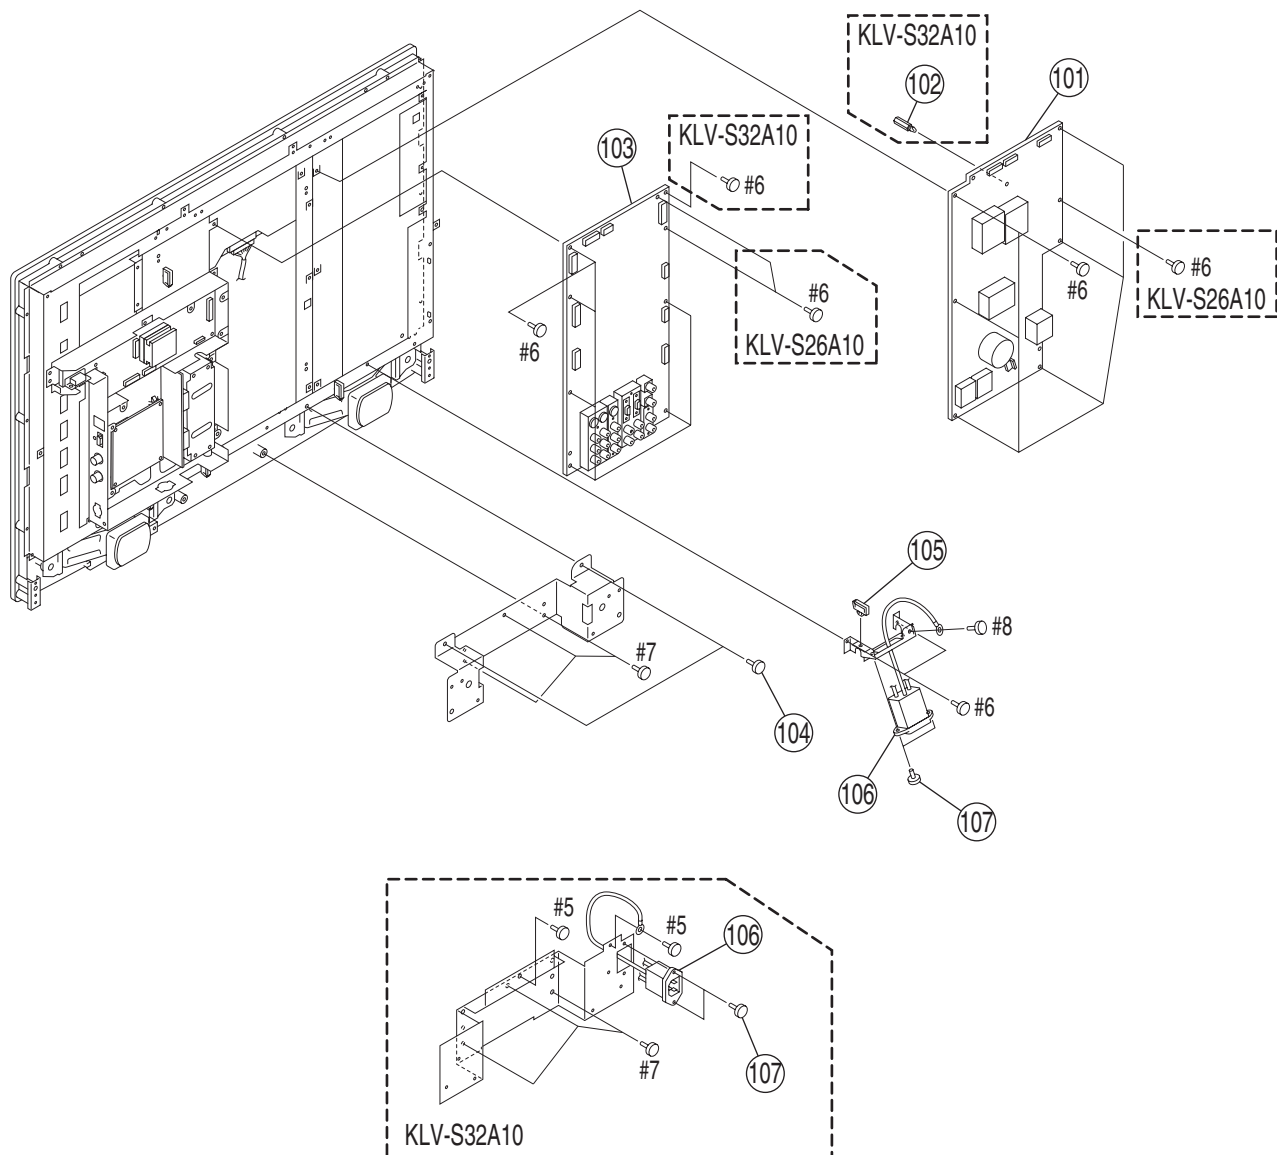


| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|--------------------------------------|------|
| 101 | * A-1128-514-A | G2 COMPL | |
| 102 | * 4-650-917-01 | SPACER, TAPPING CARD (KLV-S32A10) | |
| 103 | * A-1107-288-A | A3U MOUNT | |
| 104 | 2-320-333-01 | SCREW +B M4X6 | |
| 105 | * 4-098-165-01 | CLAMPER (KLV-S26A10) | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|------------------------------|------|
| 106 | 1-818-478-31 | AC INLET (WITH NOISE FILTER) | |
| 107 | 2-596-649-01 | +KTT 3X10 (S TYPE) | |
| #5 | 7-682-962-09 | SCREW +PSW 4X10 | |
| #6 | 7-685-871-01 | SCREW +BVTT 3X6 (S) | |
| #7 | 7-685-661-79 | SCREW +BVTP 4X12 TYPE2 N-S | |
| #8 | 7-682-663-09 | SCREW +PSW 4X12 | |

KLVS26A10/S32A10

5-1-4. CHASSIS-3

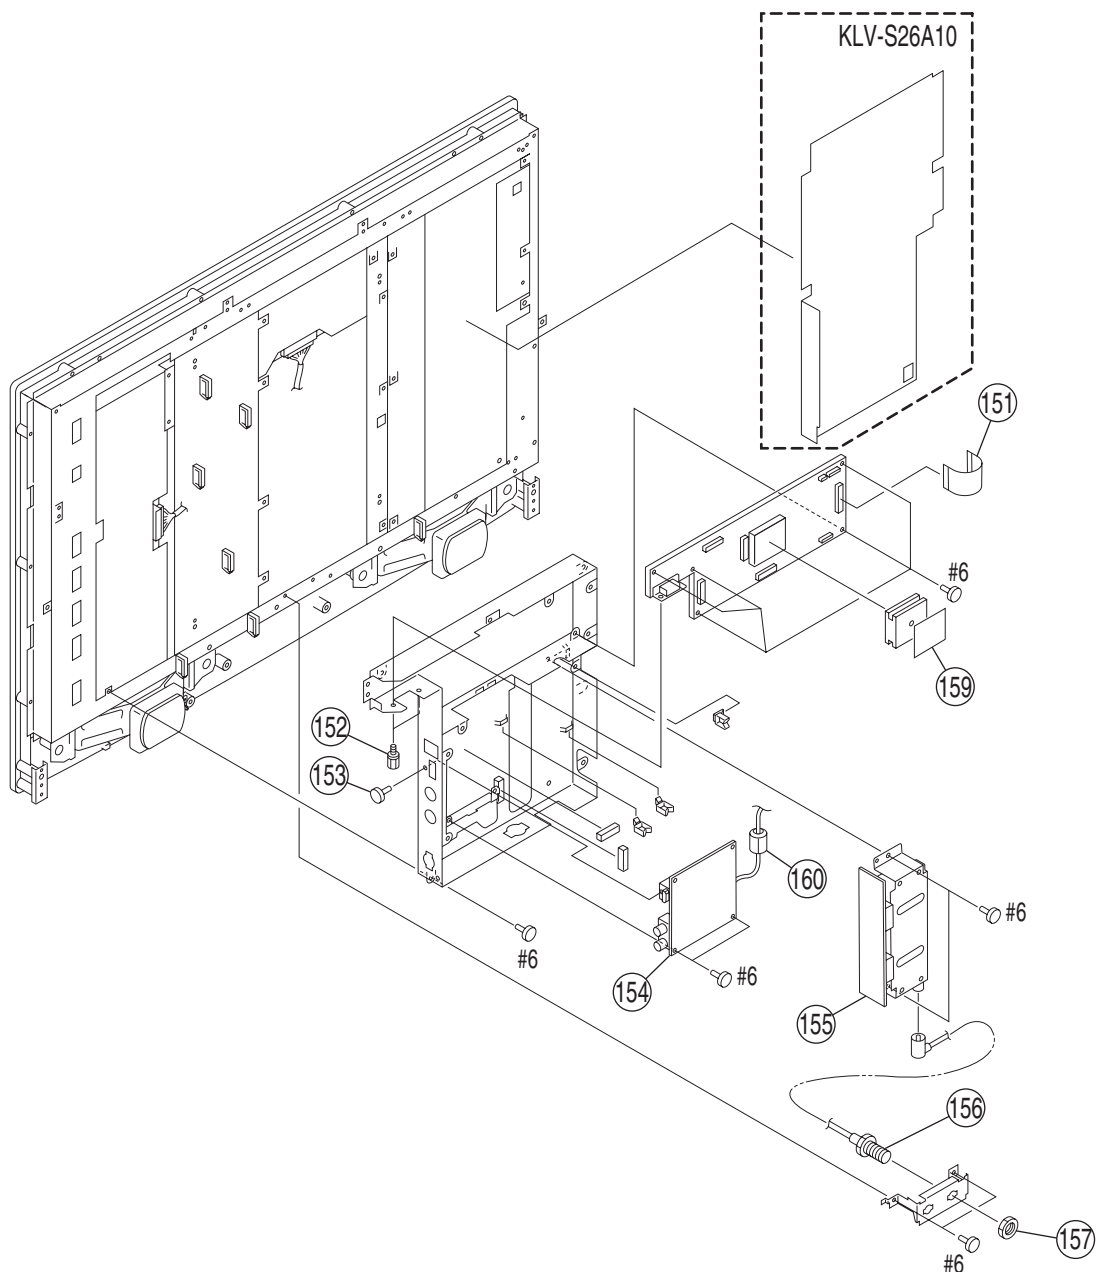


| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|------------------------------|------|
| 151 | 1-910-012-88 | CONNECTOR ASSY 50P | |
| 152 | 4-635-966-01 | SCREW (HEX) | |
| 153 | 2-588-756-01 | +B 3X4 SCREW WITH SCOTCHGRIP | |
| 154 | * A-1161-924-A | P MOUNT | |
| 155 | * A-1128-523-A | TU MOUNT (made in Japan) | |
| | * A-1139-629-A | TU MOUNT (made in USA) | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|--------------------------|------|
| 156 | 1-827-467-41 | CORD, CONNECTION | |
| 157 | 3-682-691-00 | NUT, WASHER HEXAGON | |
| 158 | A-1107-291-A | B MOUNT | |
| | A-1148-426-A | B MOUNT (KLVS32A10 (WB)) | |
| | | B MOUNT (KLVS32A10 (UC)) | |
| 159 | 2-586-173-01 | SHEET A, RADIATION | |
| 160 | 1-500-482-21 | CLAMP, SLEEVE FERRITE | |
| #6 | 7-685-871-01 | SCREW +BVTT 3X6 (S) | |

KLV-S26A10/S32A10

5-1-5. CHASSIS-4

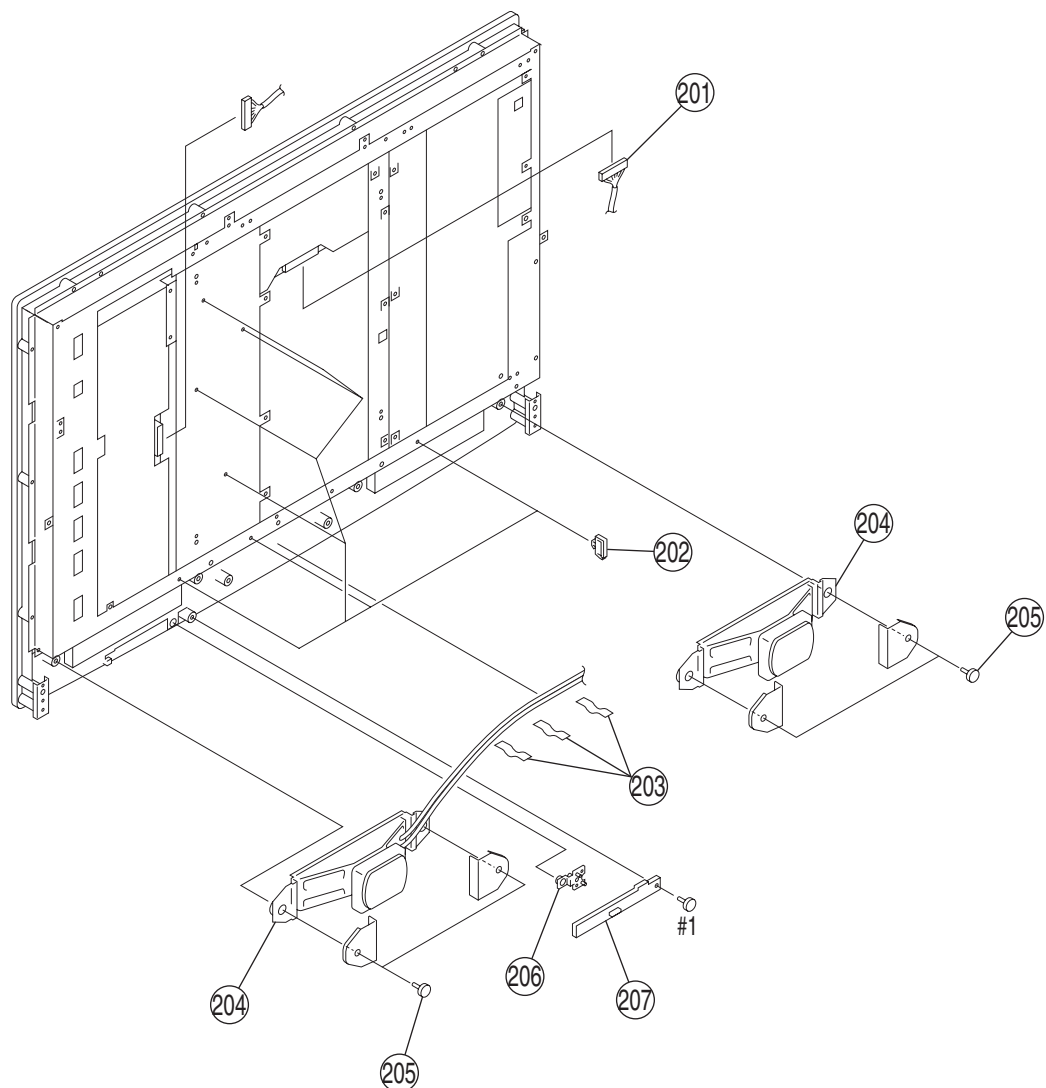


| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|---|------|
| 201 | 1-830-355-11 | HARNESS WITH CONNECTOR (LVDS) | |
| 202 | * 4-098-165-01 | CLAMPER (KLV-S26A10) | |
| 203 | 4-660-752-01 | TAPE (LCD) | |
| 204 | 1-826-063-11 | LOUDSPEAKER (4.2X15CM) (KLV-S26A10) | |
| | 1-826-042-11 | LOUDSPEAKER (5X15CM) (KLV-S32A10) | |
| 205 | 2-580-642-01 | SCREW +BVTP2 4X25 (EXCEPT KLV-S26A10) | |
| | 4-302-404-03 | TAPPING SCREW (+PWH 4X16) (KLV-S26A10) | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|-----------------------------|------|
| 206 | * 2-515-684-01 | GUIDE, LIGHT SENSOR | |
| 207 | * A-1133-034-A | H3 MOUNT | |
| #1 | 7-685-647-79 | SCREW +BVTP 3X10 TYPE2 IT-3 | |

KLV-S26A10/S32A10


5-1-6. LCD PANEL

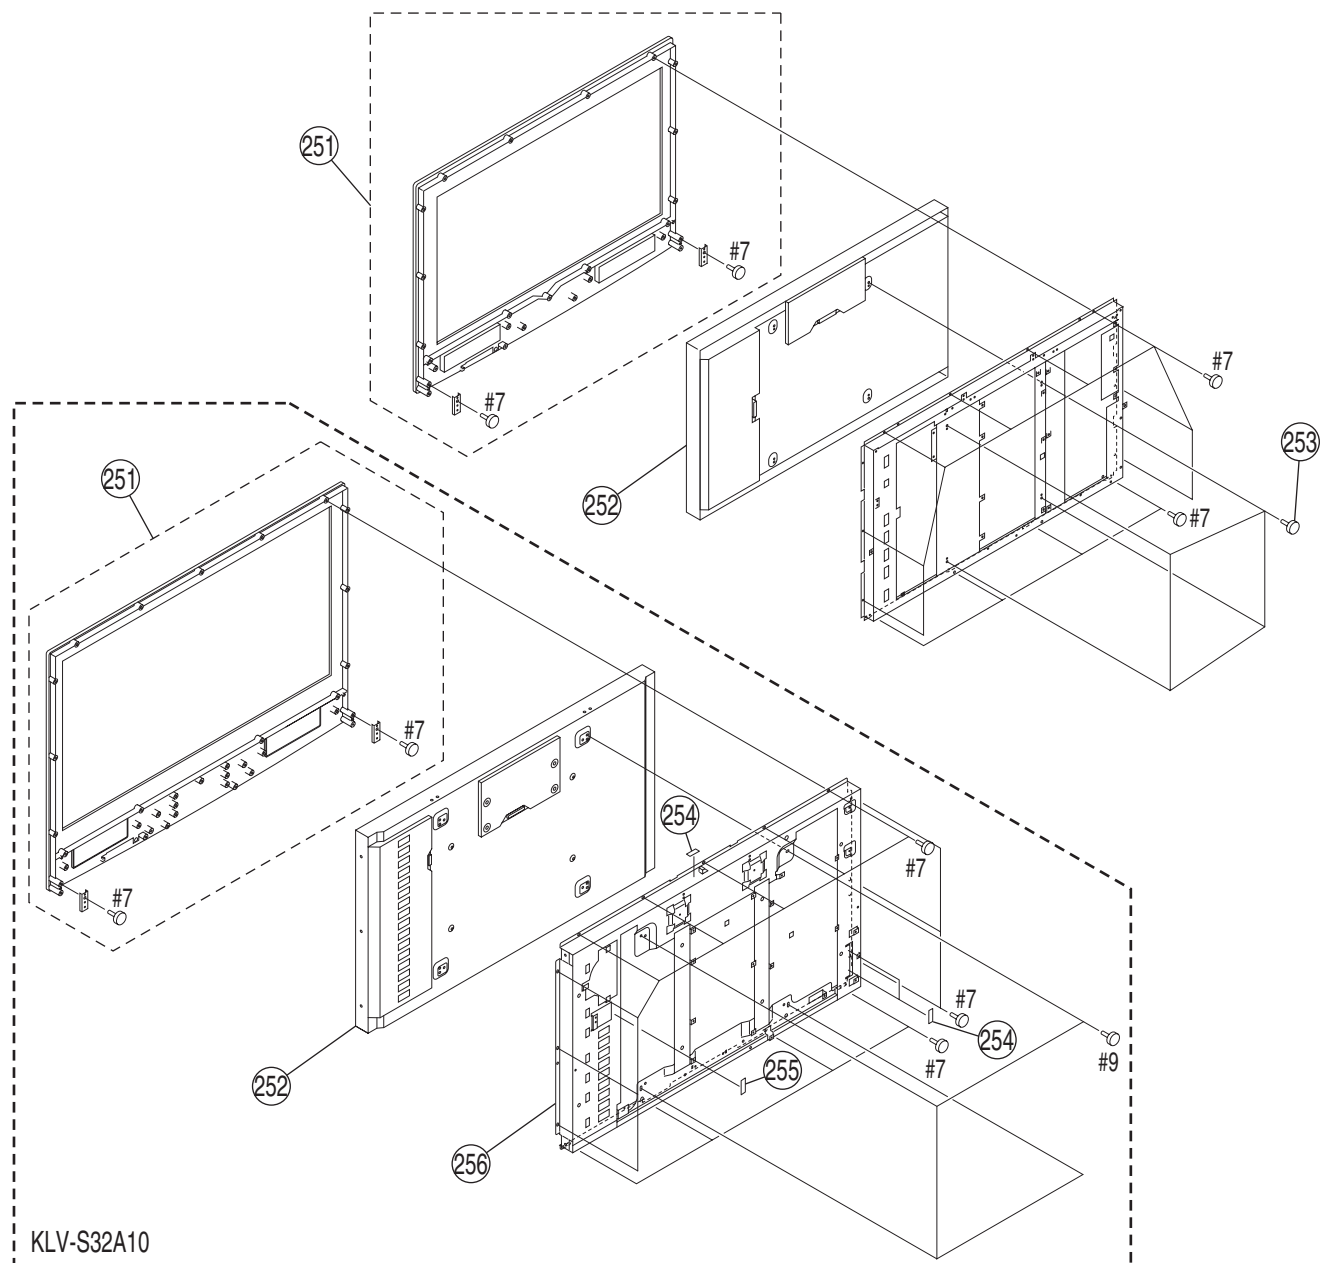

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|--|------|
| 251 | X-2059-354-2 | BEZEL ASSY (26U) (KLV-S26A10) | |
| | X-2059-355-5 | BEZEL ASSY (32U) (KLV-S32A10) | |
| 252 | 1-805-871-21 | LCD PANEL (26INCH WXGA+TFT) (KLV-S26A10) | |
| | 1-805-870-21 | LCD PANEL (32INCH WXGA+TFT) (KLV-S32A10) | |
| 253 | 2-320-333-01 | SCREW +B M4X6 | |
| 254 | 4-660-752-01 | TAPE (LCD) | |
| 255 | * 4-094-278-01 | SHEET, HOLD (KLV-S32A10) | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|---|------|
| 256 | X-2025-368-5 | LCD BRACKET ASSY (32) ((KLV-S32A10) (UC)) | |
| #7 | 7-685-661-79 | SCREW +BVTP 4X12 TYPE2 N-S | |
| #9 | 7-682-973-09 | SCREW +PSW 5X8 | |


5-1-7. PACKING MATERIALS (KLV-S26A10) (Made in Japan)

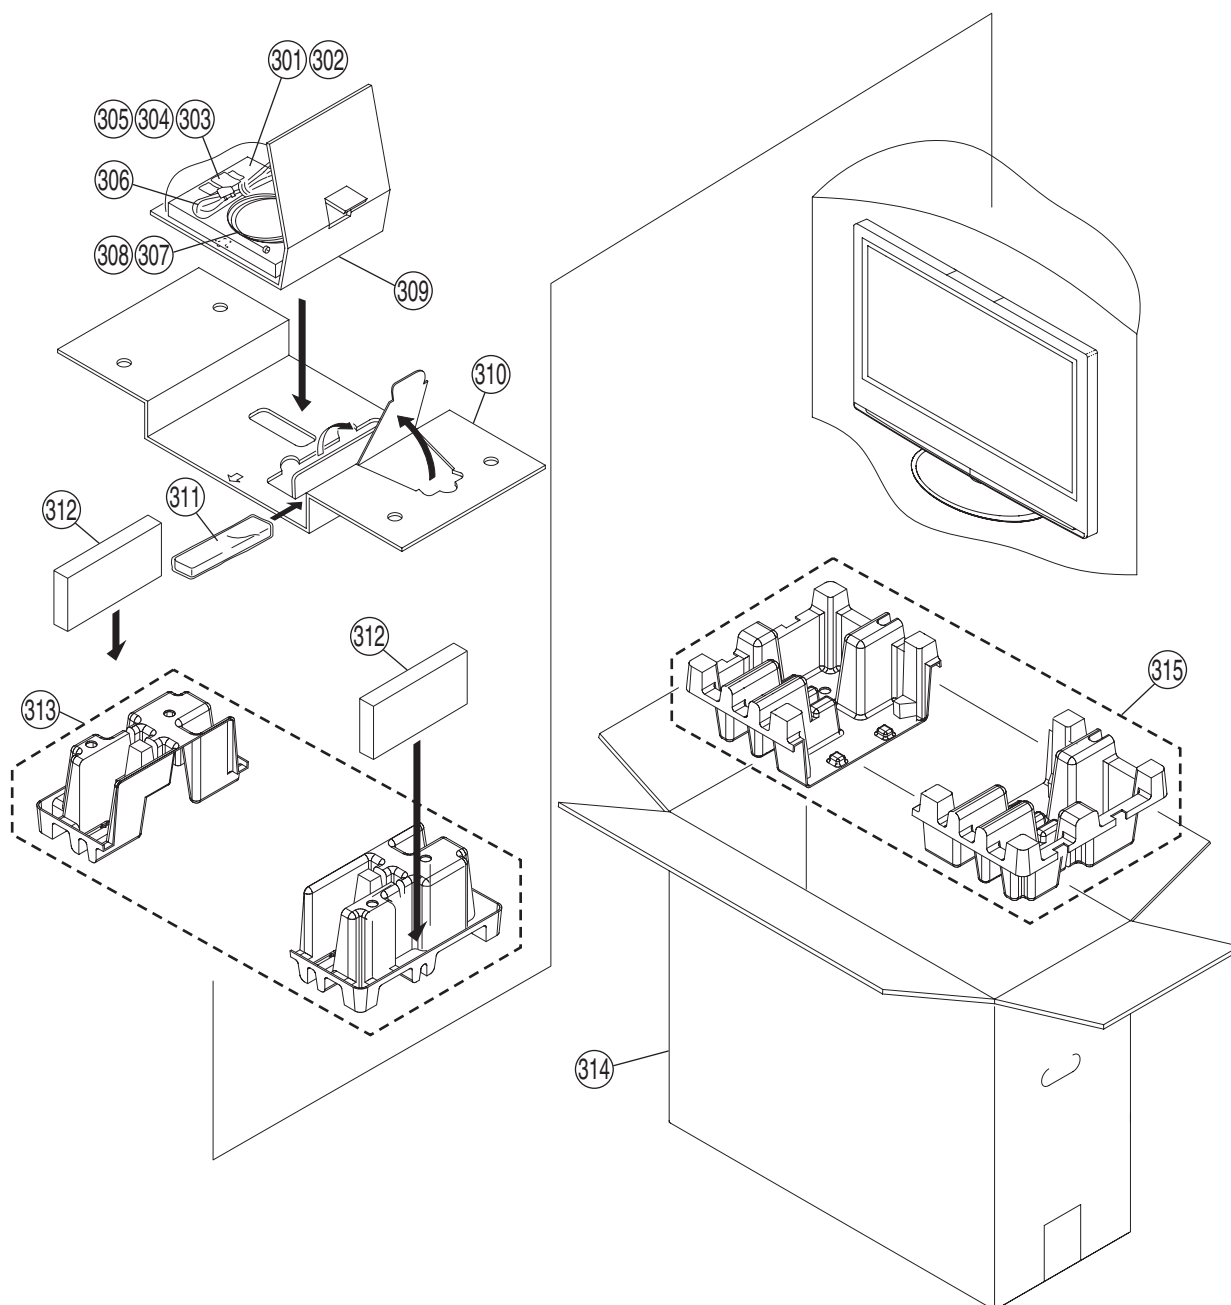

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|--------------------------|------|
| 301 | 2-589-826-12 | MANUAL, INSTRUCTION (UC) | |
| | 2-589-826-22 | MANUAL, INSTRUCTION (FR) | |
| | 2-589-826-32 | MANUAL, INSTRUCTION (ES) | |
| 302 | 2-589-827-11 | GUIDE, QUICK SETUP (UC) | |
| | 2-589-827-21 | GUIDE, QUICK SETUP (FR) | |
| | 2-589-827-31 | GUIDE, QUICK SETUP (ES) | |
| 303 | X-2055-287-2 | BAG ASSY, RUDDER LOCK | |
| 304 | 7-621-853-30 | SCREW, WOOD +R 3.1X13 | |
| 305 | 2-593-320-02 | SCREW, COIN (M6X18) | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|------------------------------------|------|
| 306 | △ 1-827-924-21 | CORD, AC | |
| 307 | 1-757-319-71 | CABLE, COAXIAL (WITH (F) PLUG) | |
| 308 | 1-830-686-11 | CABLE ASSY (15PDSUBCONNECTORX2) | |
| 309 | * 2-632-230-01 | SPACER | |
| 310 | * 2-629-715-01 | BOARD, TOP | |
| 311 | 1-479-278-11 | REMOTE COMMANDER (RM-YA001) | |
| 312 | * 2-637-536-01 | PAD | |
| 313 | * 2-582-530-01 | CUSHION (UPPER) | |
| 314 | * 2-629-714-01 | INDIVIDUAL CARTON | |
| 315 | * 2-582-531-03 | CUSHION (LOWER) | |


5-1-8. PACKING MATERIALS (KLV-S26/S32A10 (UC)) (Made in USA)

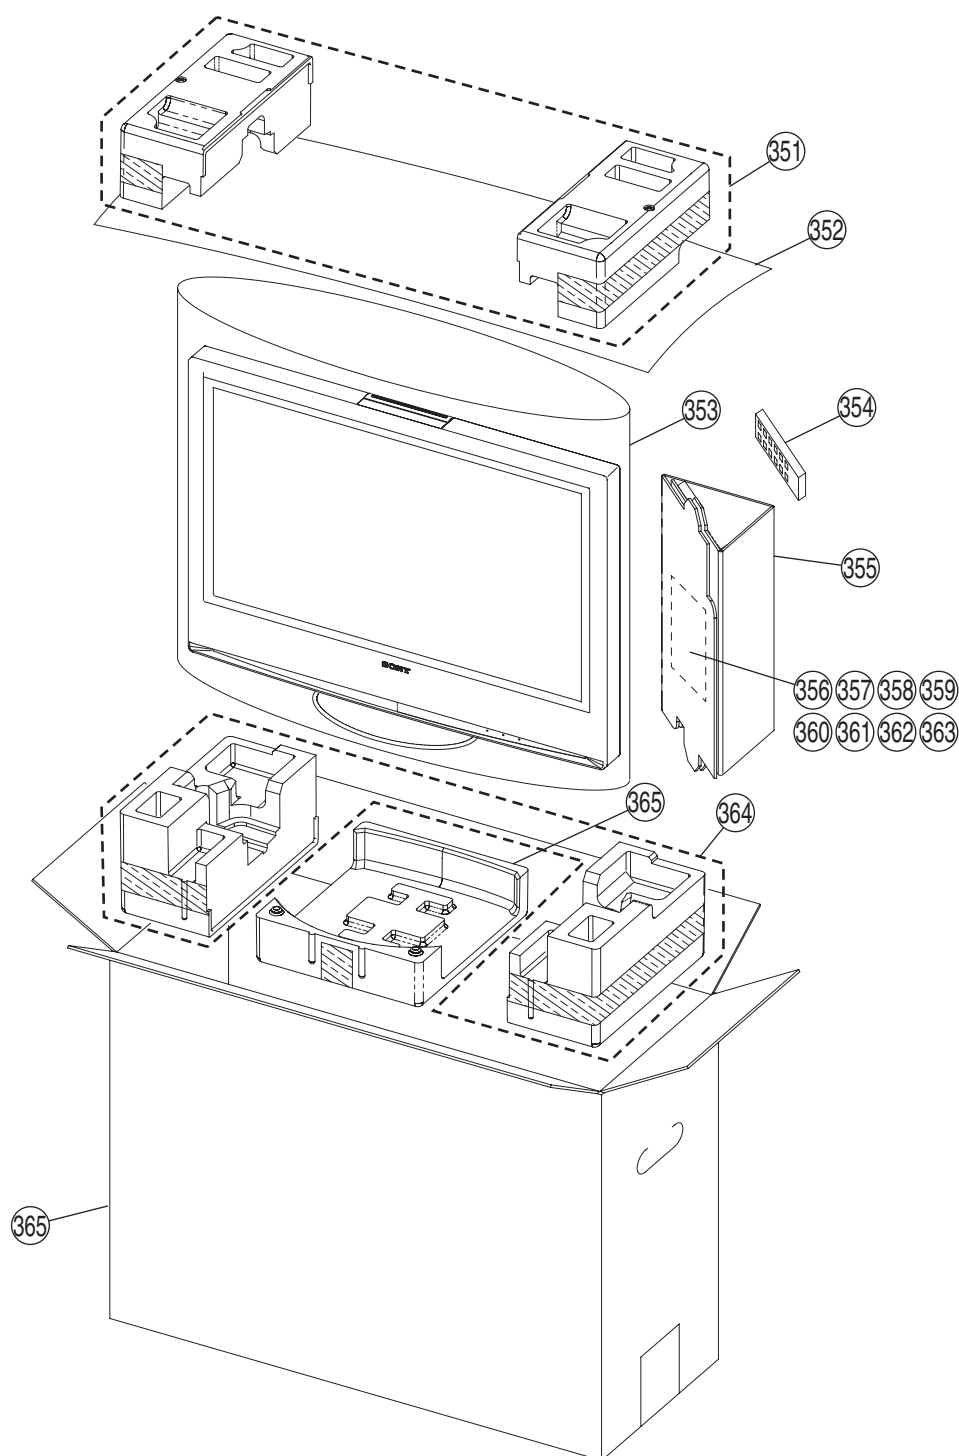

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|------------------------------------|------|
| 351 | * 2-635-952-01 | CUSHION (UPPER) | |
| | * 2-635-956-01 | CUSHION (UPPER) (KLV-S32A10) | |
| 352 | * 2-649-072-01 | SHEET, PROTECTION | |
| | * 2-649-073-01 | SHEET, PROTECTION (KLV-S32A10) | |
| 353 | * 2-637-716-01 | BAG, PROTECTION | |
| | * 2-637-717-01 | BAG, PROTECTION (KLV-S32A10) | |
| 354 | 1-479-278-11 | REMOTE COMMANDER (RM-YA001) | |
| 355 | * 2-651-196-01 | INSERT, CORNER (KLV-S26A10) | |
| | * 2-651-197-01 | INSERT, CORNER (KLV-S32A10) | |
| 356 | X-2055-287-2 | BAG ASSY, RUDDER LOCK | |
| 357 | 2-593-320-02 | SCREW, COIN (M6X18) | |
| 358 | 7-621-853-30 | SCREW, WOOD +R 3.1X13 | |
| 359 | 1-757-319-71 | CABLE, COAXIAL (WITH (F) PLUG) | |
| 360 | 1-830-686-11 | CABLE ASSY (15PDSUBCONNECTORX2) | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|--------------------------------|------|
| 361 | 1-827-924-21 | CORD, AC | |
| 362 | 2-651-094-11 | MANUAL, INSTRUCTION (UC) | |
| | 2-651-094-21 | MANUAL, INSTRUCTION (FR) | |
| | 2-651-094-31 | MANUAL, INSTRUCTION (ES) | |
| 363 | 2-651-095-11 | GUIDE, QUICK SETUP (UC) | |
| | 2-651-095-21 | GUIDE, QUICK SETUP (FR) | |
| | 2-651-095-31 | GUIDE, QUICK SETUP (ES) | |
| 364 | * 2-635-953-01 | CUSHION (LOWER) | |
| | * 2-635-957-01 | CUSHION (LOWER) (KLV-S32A10) | |
| 365 | * 2-635-954-01 | CUSHION, SUPPORT (KLV-S26A10) | |
| | * 2-635-958-01 | CUSHION, SUPPORT (KLV-S32A10) | |
| 366 | * 2-635-955-01 | INDIVIDUAL CARTON | |
| | * 2-635-959-01 | INDIVIDUAL CARTON (KLV-S32A10) | |


5-1-9. PACKING MATERIALS (KLV-S32A10 (UC)) (Made in Japan)

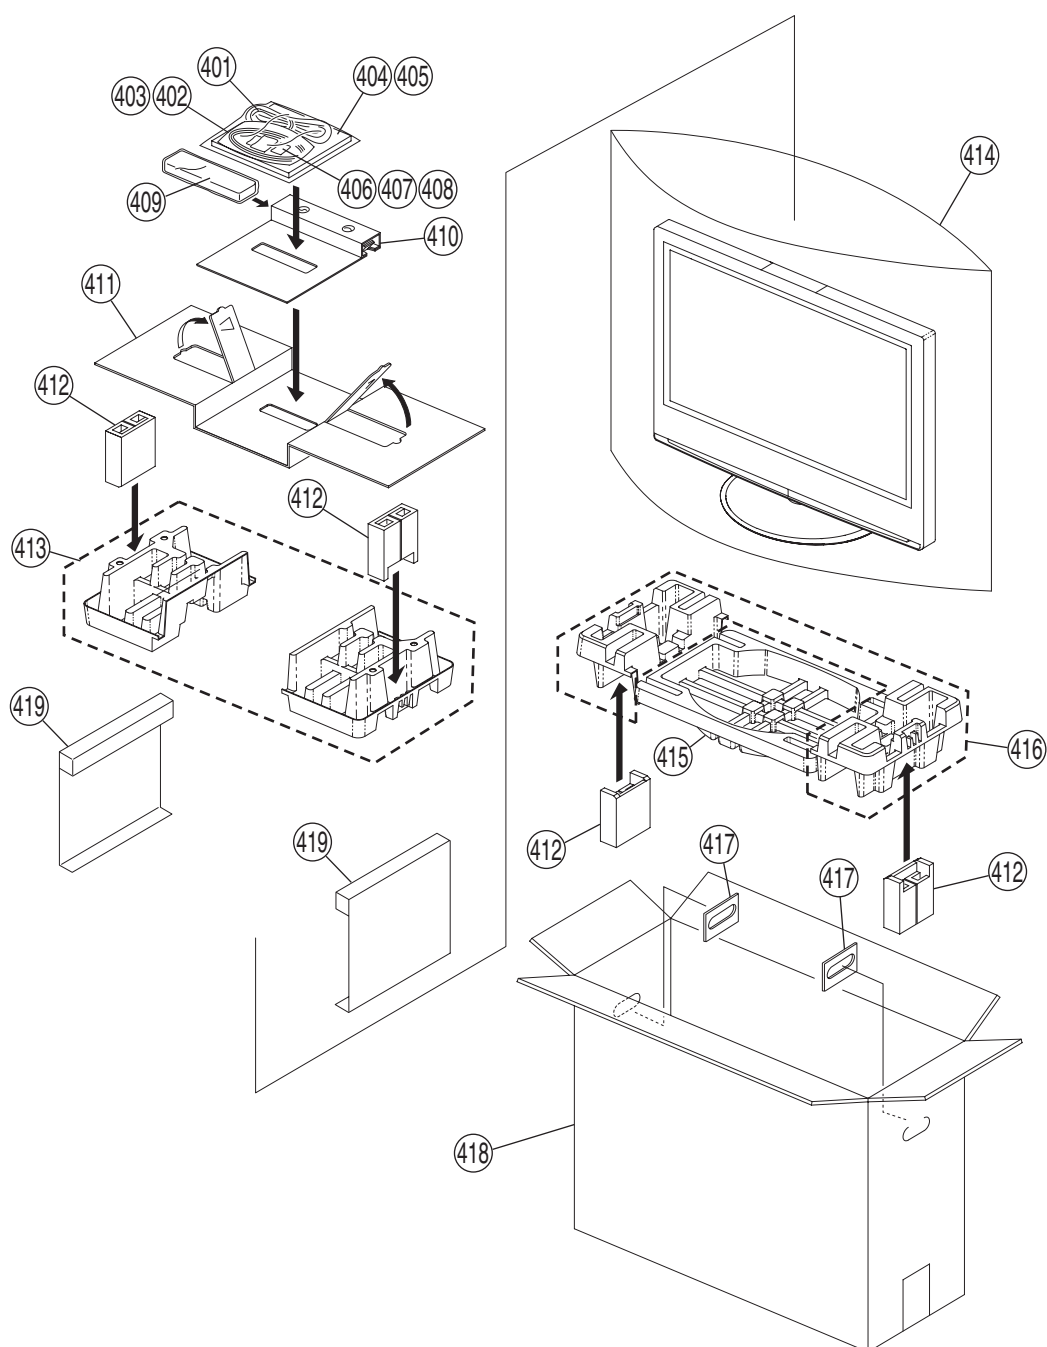

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|------------------------------------|------|
| 401 | △ 1-827-924-21 | CORD, AC | |
| 402 | 1-757-319-71 | CABLE, COAXIAL (WITH (F) PLUG) | |
| 403 | 1-830-686-11 | CABLE ASSY (15PDSUBCONNECTORX2) | |
| 404 | 2-589-826-12 | MANUAL, INSTRUCTION (UC) | |
| | 2-589-826-22 | MANUAL, INSTRUCTION (FR) | |
| | 2-589-826-32 | MANUAL, INSTRUCTION (ES) | |
| 405 | 2-589-827-11 | GUIDE, QUICK SETUP (UC) | |
| | 2-589-827-21 | GUIDE, QUICK SETUP (FR) | |
| | 2-589-827-31 | GUIDE, QUICK SETUP (ES) | |
| 406 | X-2055-287-2 | BAG ASSY, RUDDER LOCK | |
| 407 | 2-593-320-02 | SCREW, COIN (M6X18) | |
| 408 | 7-621-853-30 | SCREW, WOOD +R 3.1X13 | |
| 409 | 1-479-278-11 | REMOTE COMMANDER (RM-YA001) | |
| 410 | * 2-634-936-01 | SPACER | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|------------------------|------|
| 411 | * 2-548-386-02 | BOARD, TOP | |
| 412 | * 2-593-483-03 | REINFORCEMENT SIDE | |
| 413 | * 2-548-383-02 | CUSHION (UPPER) | |
| 414 | * 2-630-927-01 | BAG, PROTECTION | |
| 415 | * 2-548-384-01 | CUSHION (MIDDLE LOWER) | |
| 416 | * 2-548-385-02 | CUSHION (LOWER) | |
| 417 | * 4-067-995-01 | HANDLE (E) | |
| 418 | * 2-637-890-01 | INDIVIDUAL CARTON | |
| 419 | 2-655-447-01 | CUSHION (SIDE) | |

5-1-10. PACKING MATERIALS (KLV-S32A10 (WB)) (Made in Japan)

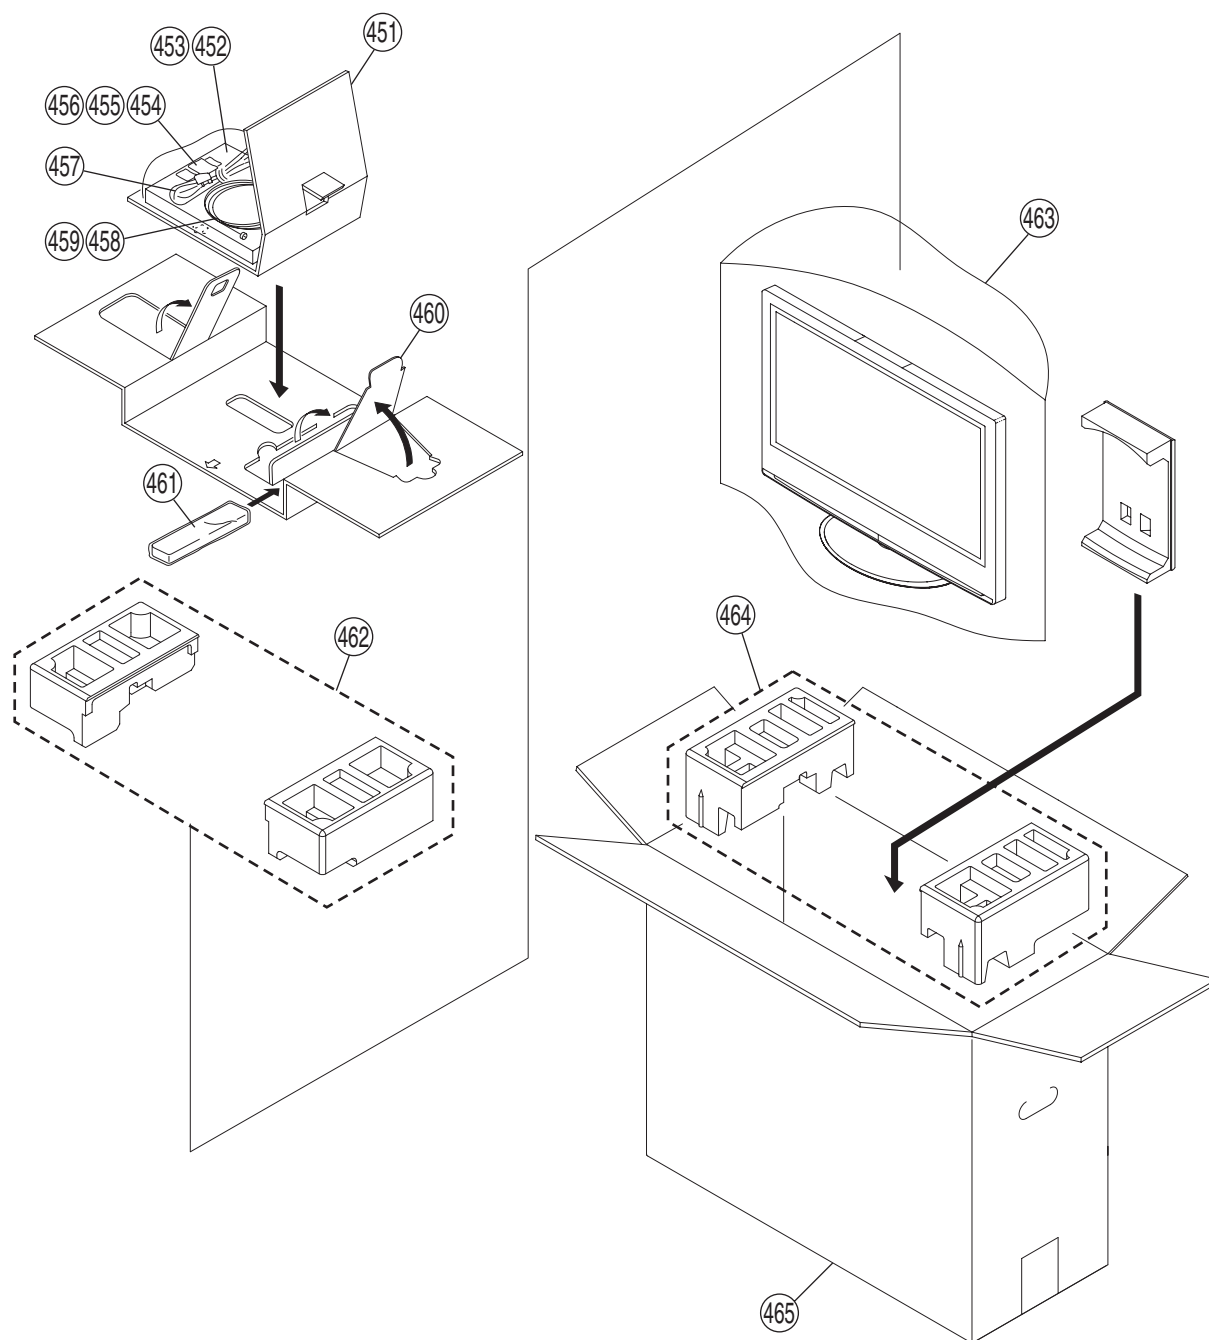


| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|------------------------------------|------|
| 451 | * 2-638-424-01 | SPACER | |
| 452 | 2-651-113-11 | MANUAL, INSTRUCTION | |
| 453 | 2-651-114-11 | GUIDE, QUICK SETUP | |
| 454 | X-2055-287-2 | BAG ASSY, RUDDER LOCK | |
| 455 | 7-621-853-30 | SCREW, WOOD +R 3.1X13 | |
| 456 | 2-593-320-02 | SCREW, COIN (M6X18) | |
| 457 | △ 1-831-280-11 | POWER SUPPLY CORD SET | |
| 458 | 1-757-319-71 | CABLE, COAXIAL (WITH (F) PLUG) | |
| 459 | 1-830-686-11 | CABLE ASSY (15PDSUBCONNECTORX2) | |
| 460 | * 2-638-423-01 | BOARD, TOP | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|-----------------------------|------|
| 461 | 1-479-564-11 | REMOTE COMMANDER (RM-YA001) | |
| 462 | * 2-638-425-01 | CUSHION (UPPER) | |
| 463 | * 4-377-015-01 | BAG, PROTECTION | |
| 464 | * 2-638-426-01 | CUSHION (LOWER) | |
| 465 | * 2-653-740-01 | INDIVIDUAL CARTON | |

5-2. KLV-S40A10


5-2-1. REAR CABINET ASSY AND STAND ASSY

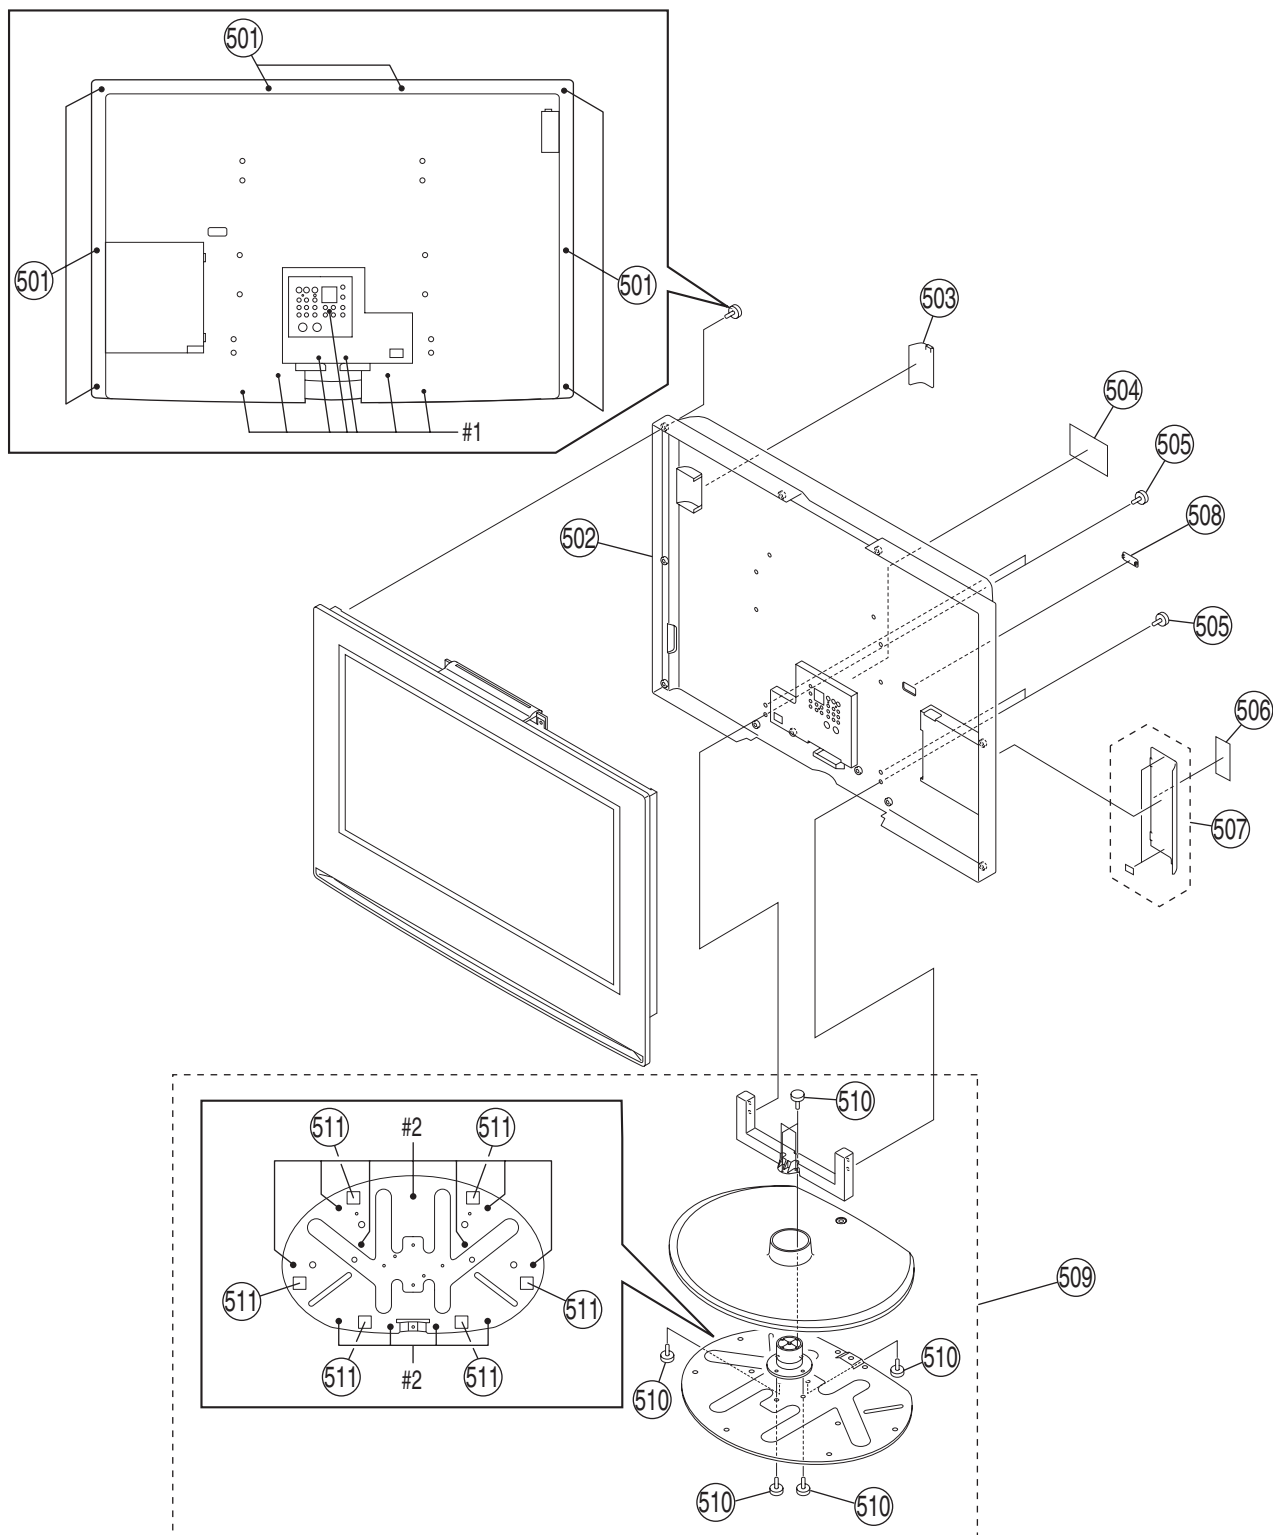

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|--------------------------|---------|
| 501 | 2-580-600-01 | SCREW +PSW M4X8 | |
| 502 | X-2102-512-1 | CABINET, REAR ASSY (40U) | |
| 503 | 2-629-170-01 | COVER SIDE | |
| 504 | * 2-548-454-41 | LABEL, INFORMATION (U) | |
| 505 | 2-580-608-01 | SCREW +PSW M5X16 | |
| 506 | 2-650-129-11 | LABEL, JC | |
| 507 | * X-2067-584-1 | COVER ASSY (40), JACK | |
| 508 | 2-021-173-12 | COVER, ECS (20) | |
| 509 | X-2050-187-2 | STAND, ASSY | 510,511 |
| 510 | 2-580-607-01 | SCREW +PSW M5X12 | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|-----------------------------|------|
| 511 | 2-590-249-01 | FOOT | |
| #1 | 7-685-647-79 | SCREW +BVTP 3X10 TYPE2 IT-3 | |
| #2 | 7-685-648-79 | SCREW +BVTP 3X12 TYPE2 IT-3 | |


KLV-S40A10
5-2-2. CHASSIS-1

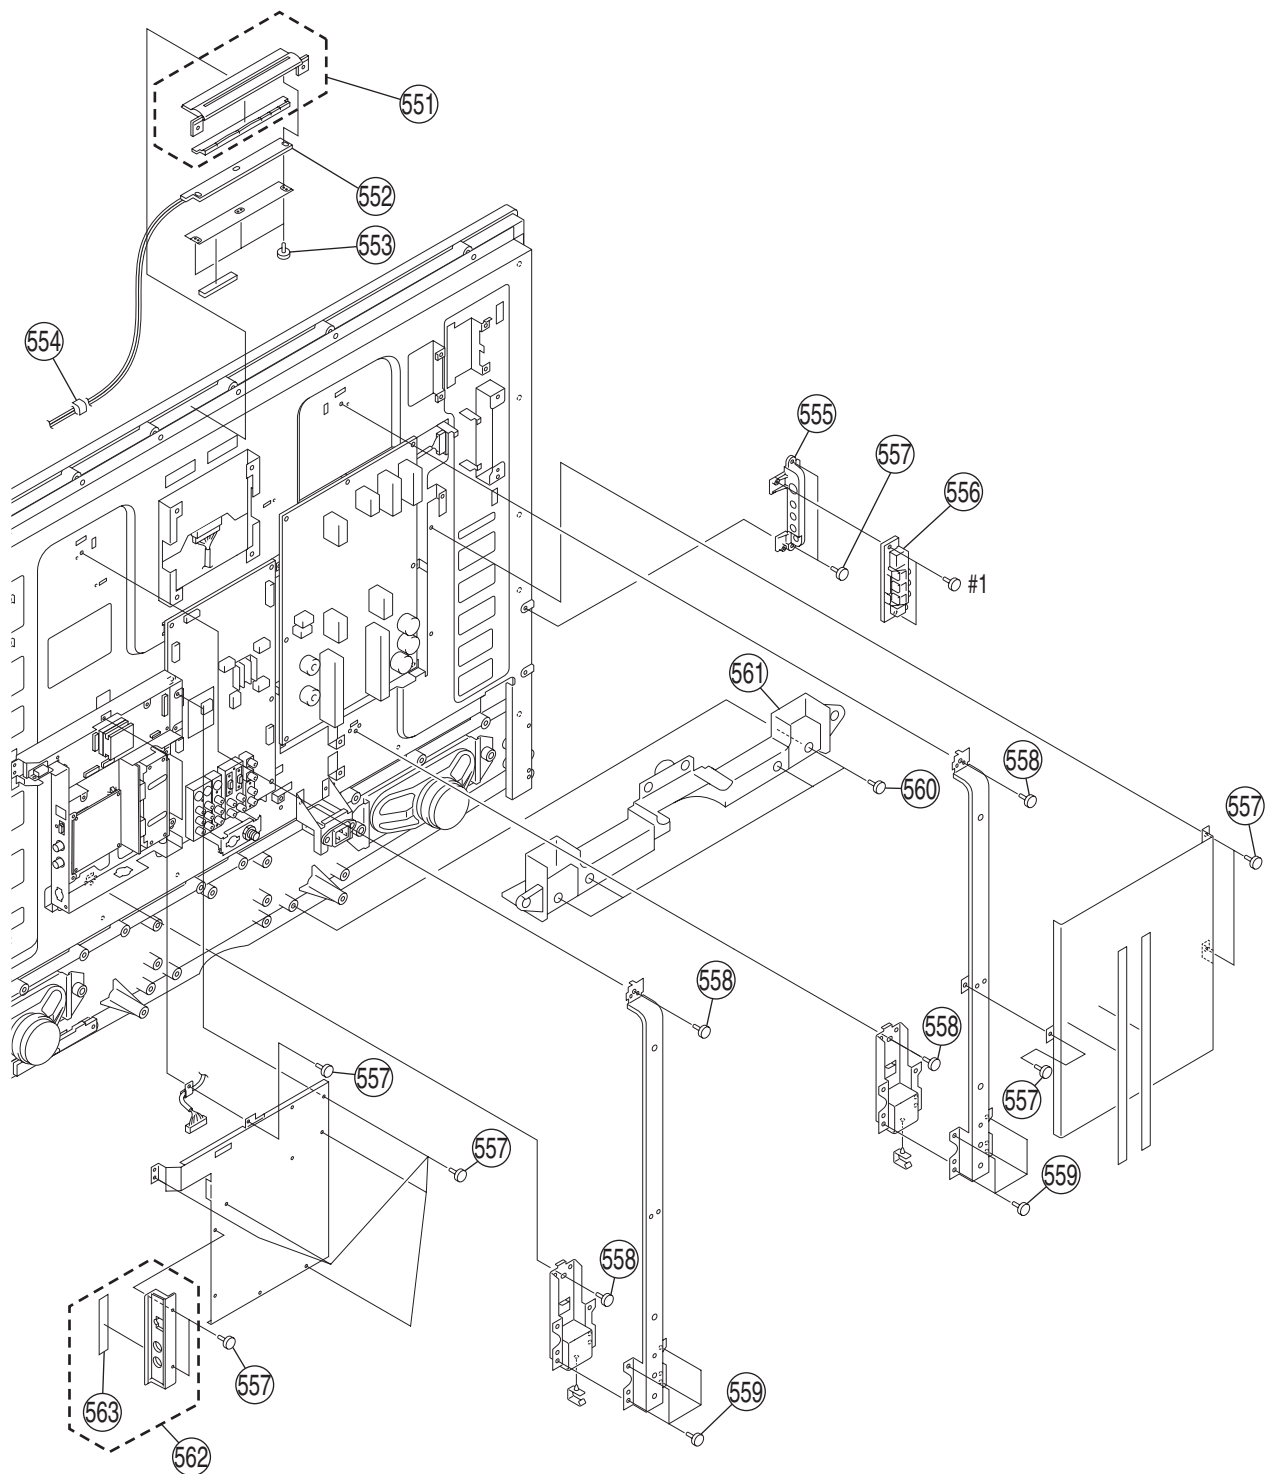

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|--------------------------|------|
| 551 | X-2059-387-1 | BUTTON, MULTI ASSY (32U) | |
| 552 | * A-1080-915-A | H1 MOUNT | |
| 553 | 4-908-792-41 | SCREW (B2) | |
| 554 | 4-660-752-01 | TAPE (LCD) | |
| 555 | X-2050-882-2 | HOLDER SIDE JACK ASSY | |
| 556 | * A-1158-565-A | H2 MOUNT | |
| 557 | 2-580-628-01 | SCREW +BVST 3X6 | |
| 558 | 2-580-607-01 | SCREW +PSW M5X12 | |
| 559 | 2-580-630-01 | SCREW +BVST 4X8 | |
| 560 | 2-580-640-01 | SCREW +BVTP2 4X16 | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|-----------------------------|------|
| 561 | 2-638-282-01 | COVER (40), UNDER | |
| 562 | X-2055-266-2 | BRACKET SIDE ASSY (U) | 563 |
| 563 | 4-099-816-11 | TAPE (SP C2) | |
| #1 | 7-685-647-79 | SCREW +BVTP 3X10 TYPE2 IT-3 | |


KLV-S40A10
5-2-3. CHASSIS-2

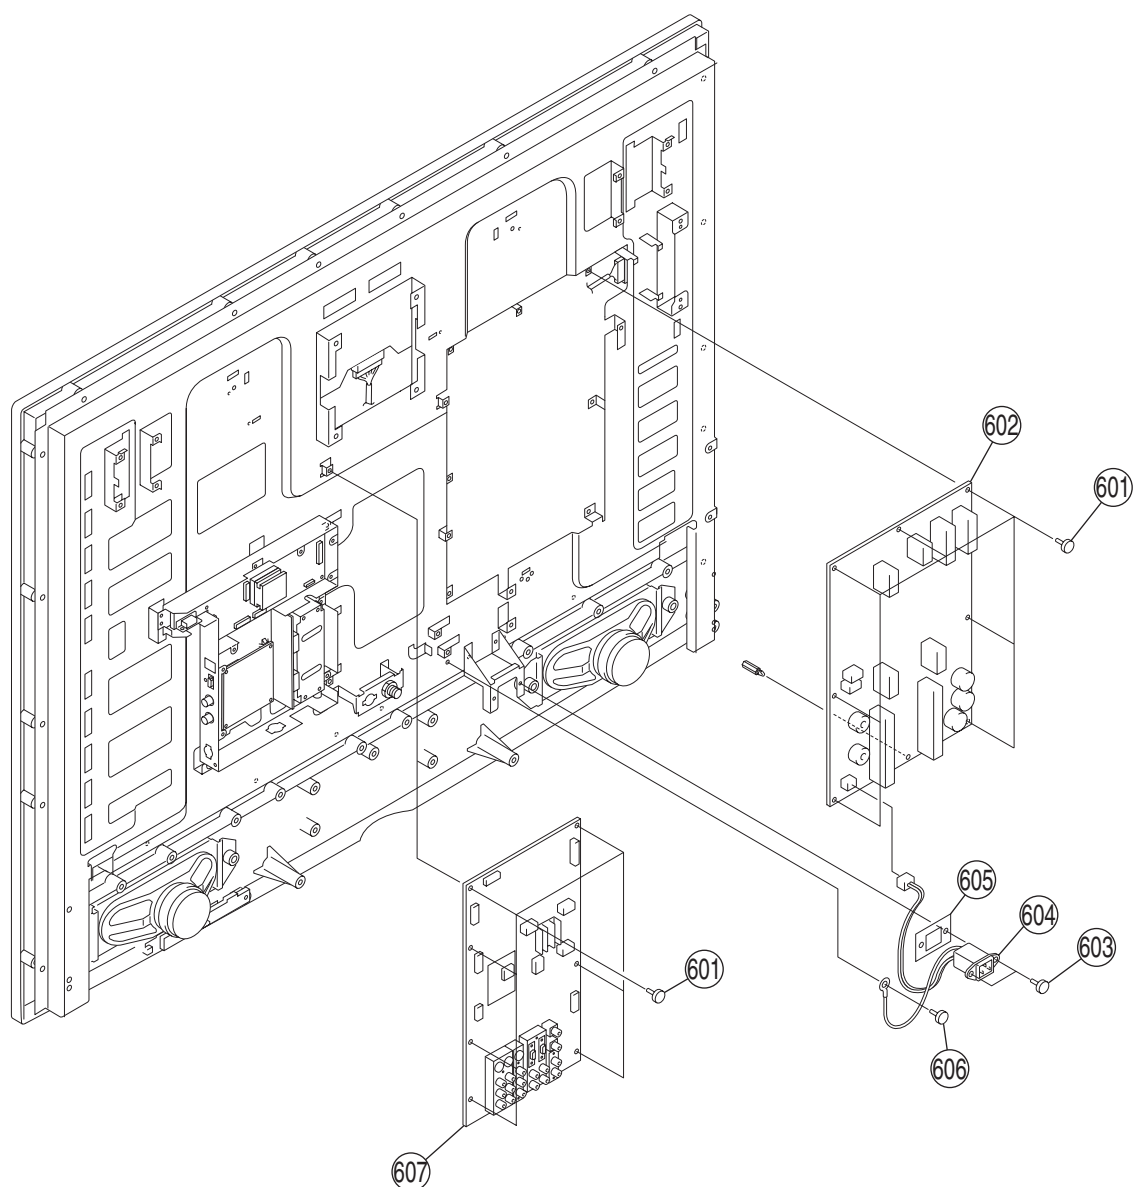

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|-------------------------------|------|
| 601 | 2-580-628-01 | SCREW +BVST 3X6 | |
| 602 | * A-1157-871-A | G3 MOUNT | |
| 603 | 2-596-649-01 | +KTT 3X10 (S TYPE) | |
| 604 | △ 1-819-763-11 | INLET, AC (WITH NOISE FILTER) | |
| 605 | * 2-656-788-01 | SHEET_PROTECT (AC) | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|-----------------|------|
| 606 | 2-580-600-01 | SCREW +PSW M4X8 | |
| 607 | * A-1157-870-B | A3U MOUNT | |


KLV-S40A10
5-2-4. CHASSIS-3

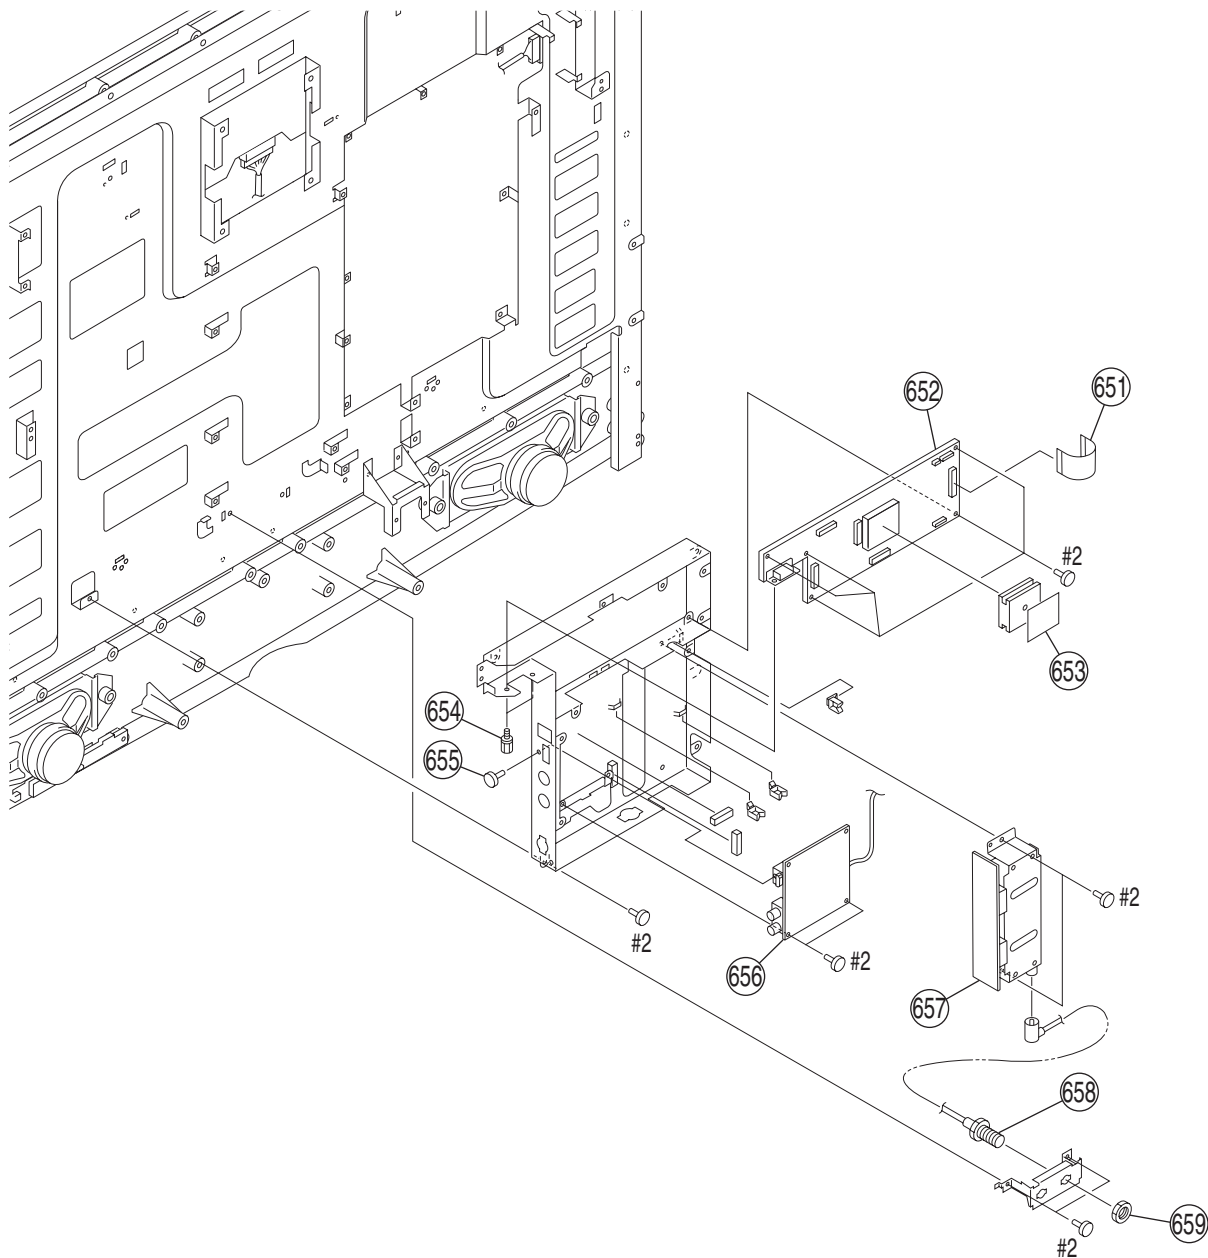

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|------------------------------|------|
| 651 | 1-910-022-46 | CONNECTOR ASSY 50P | |
| 652 | A-1164-481-A | B MOUNT | |
| 653 | 2-586-173-01 | SHEET A, RADIATION | |
| 654 | 4-635-966-01 | SCREW (HEX) | |
| 655 | 2-588-756-01 | +B 3X4 SCREW WITH SCOTCHGRIP | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|---------------------|------|
| 656 | * A-1161-924-A | P MOUNT | |
| 657 | * A-1128-523-A | TU MOUNT | |
| 658 | 1-827-467-41 | CORD, CONNECTION | |
| 659 | 3-682-691-00 | NUT, WASHER HEXAGON | |
| #2 | 7-685-871-01 | SCREW +BVTT 3X6 (S) | |


KLV-S40A10
5-2-5. CHASSIS-4

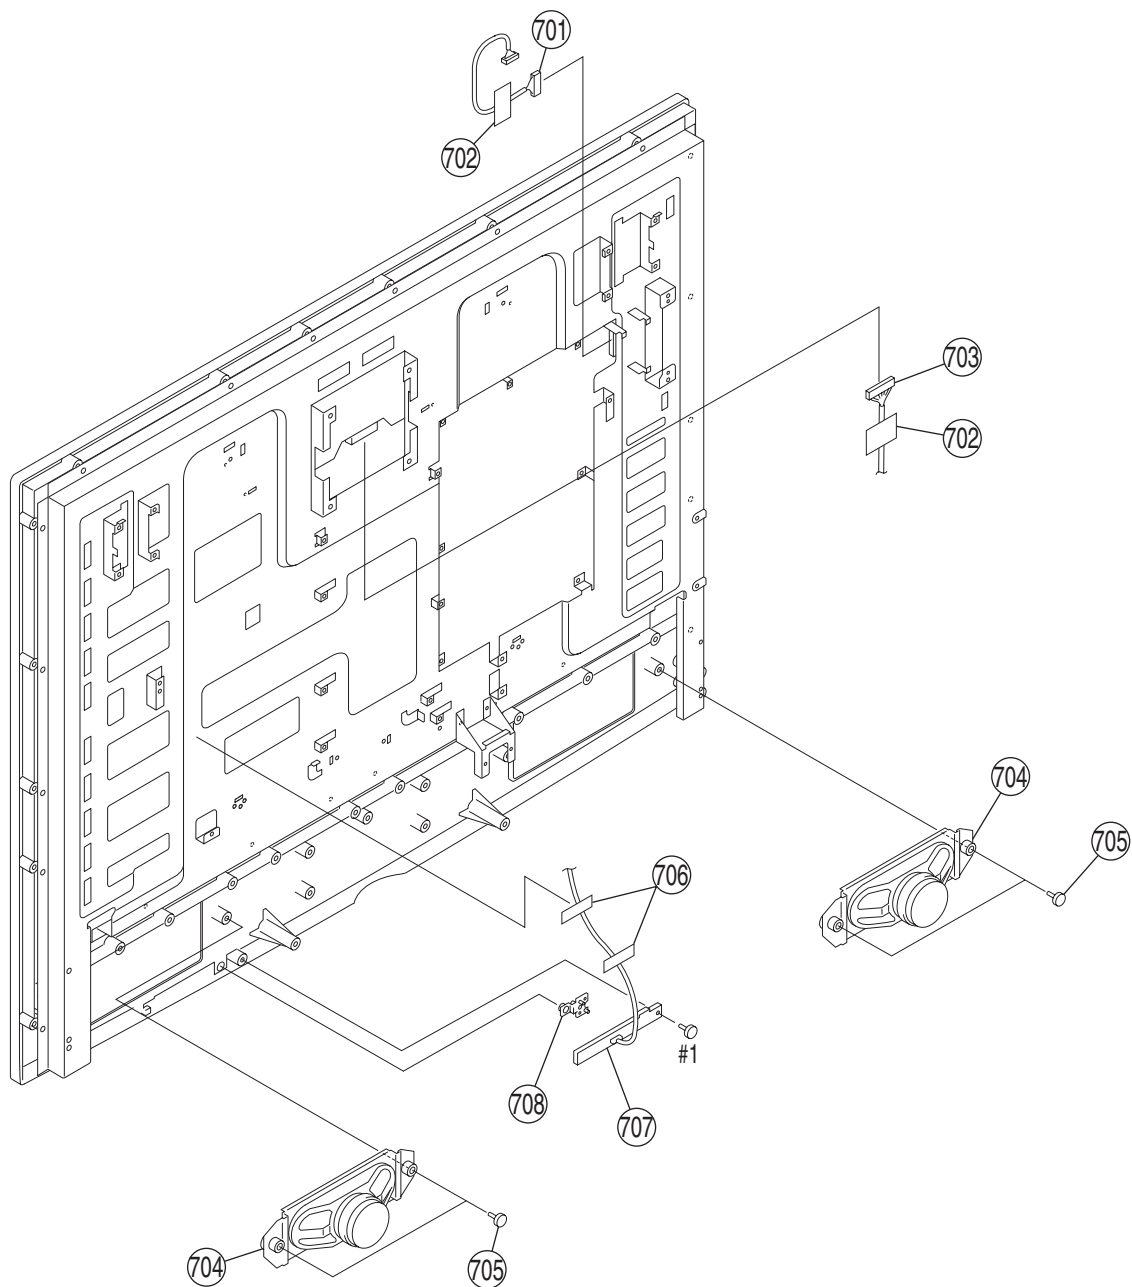

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|-------------------------------|------|
| 701 | * 1-910-019-25 | CONNECTOR ASSY 14P | |
| 702 | * 4-094-278-01 | SHEET, HOLD | |
| 703 | 1-830-852-11 | HARNESS WITH CONNECTOR (LVDS) | |
| 704 | 1-826-231-11 | SPEAKER | |
| 705 | 4-302-404-11 | TAPPING SCREW (+PWH 4X16) | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|-----------------------------|------|
| 706 | 4-660-752-01 | TAPE (LCD) | |
| 707 | A-1158-566-A | H3 MOUNT | |
| 708 | * 2-515-684-01 | GUIDE, LIGHT SENSOR | |
| #1 | 7-685-647-79 | SCREW +BVTP 3X10 TYPE2 IT-3 | |


KLV-S40A10
5-2-6. LCD PANEL

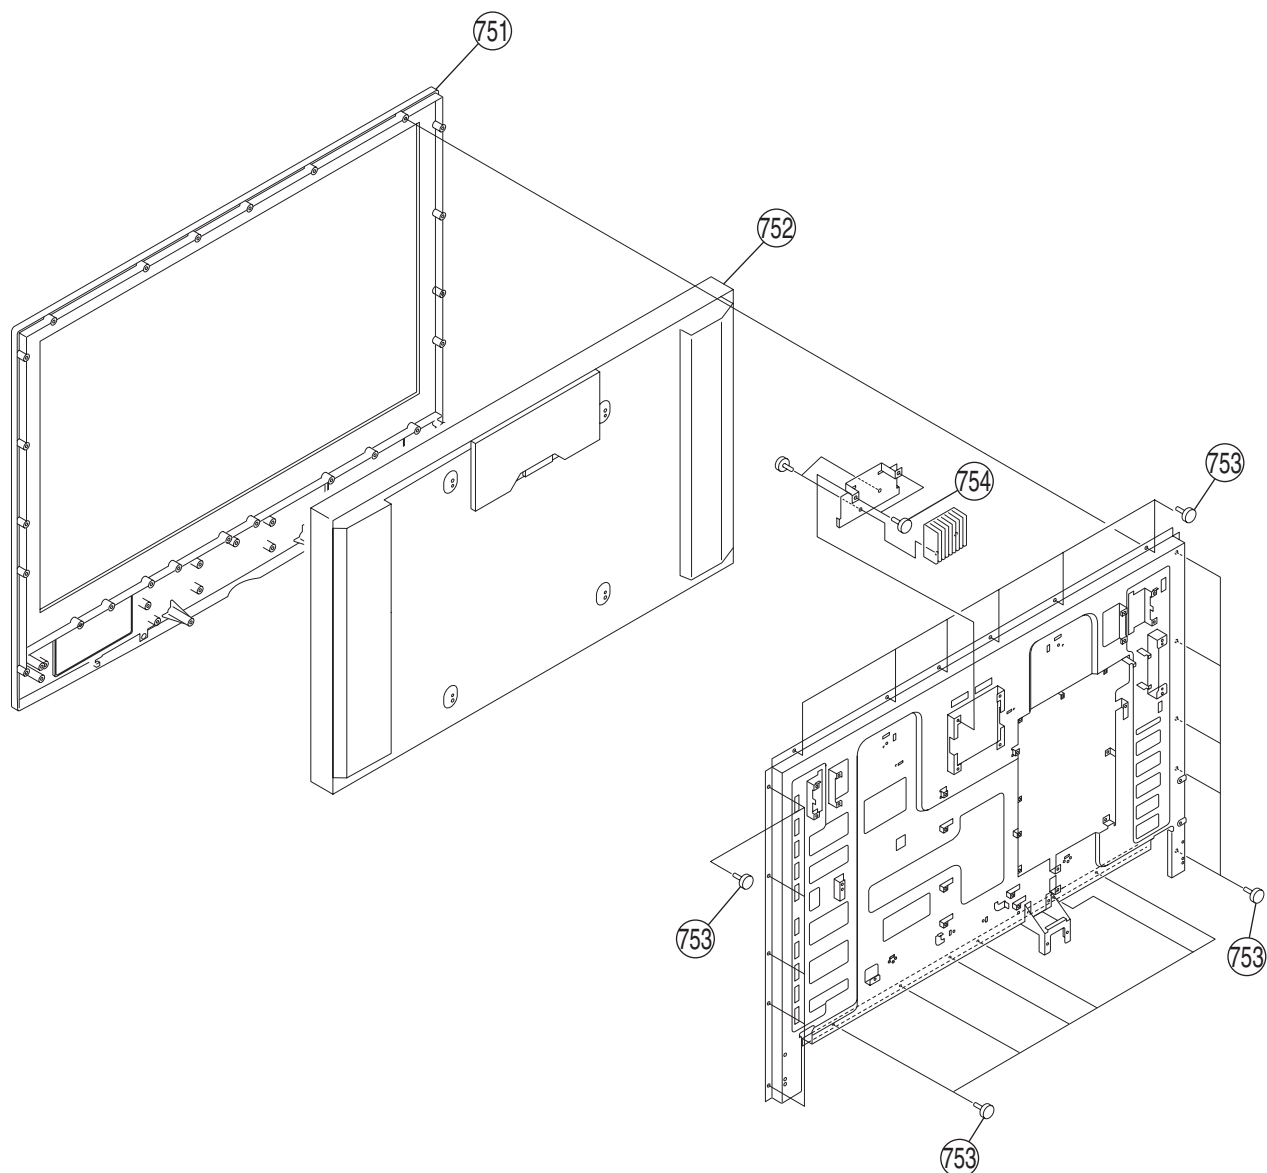

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|-------------------|------|
| 751 | X-2102-490-1 | BEZEL ASSY(40U) | |
| 752 | 1-805-879-31 | LCD PANEL | |
| 753 | 2-580-640-01 | SCREW +BVTP2 4X16 | |
| 754 | 2-580-600-01 | SCREW +PSW M4X8 | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------|---------------|------|
|----------|----------|---------------|------|

5-2-7. PACKING MATERIALS (KLV-S40A10 (CND/MX))

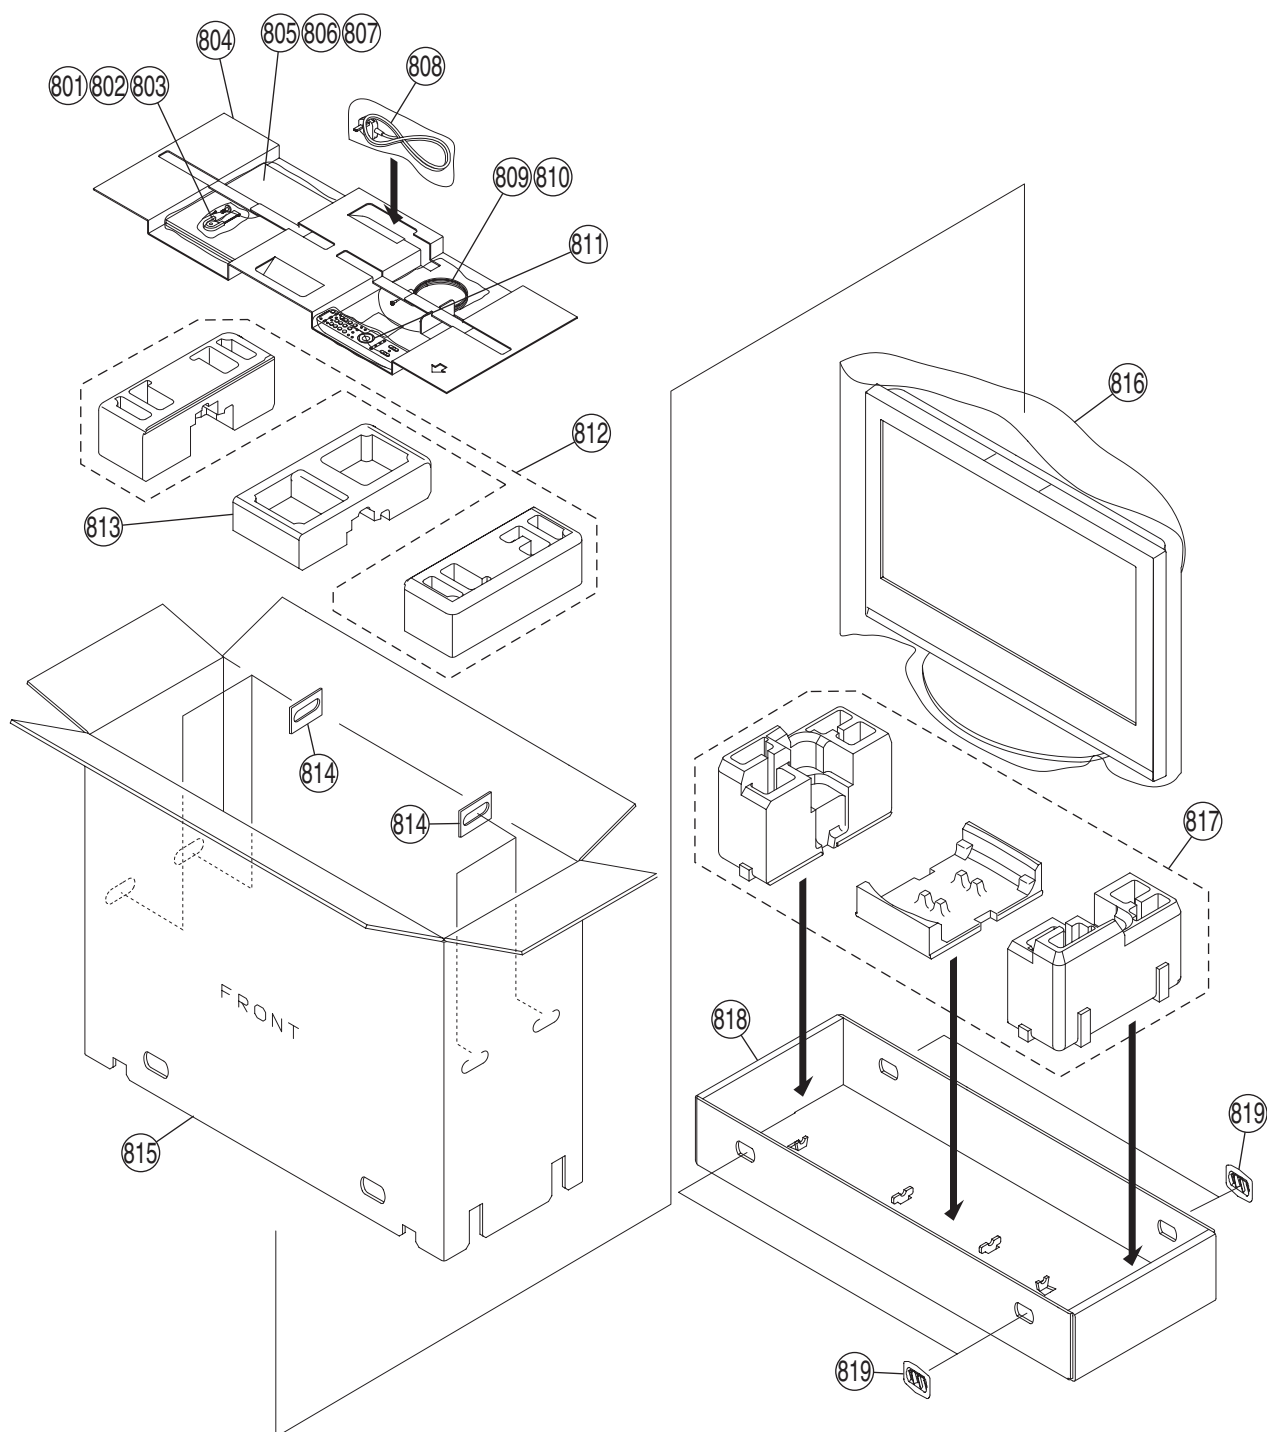

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|---------------------------------|------|
| 801 | X-2102-511-1 | BAG ASSY, RUDDER LOCK | |
| 802 | 2-593-320-02 | SCREW, CION (M6X18) | |
| 803 | 2-580-663-01 | SCREW, WOOD 3.8X20 | |
| 804 | * 2-654-420-01 | BOARD, TOP | |
| 805 | 2-650-915-11 | MANUAL, INSTRUCTION(US) | |
| | 2-650-915-21 | MANUAL, INSTRUCTION(FR) | |
| | 2-650-915-31 | MANUAL, INSTRUCTION(ES) | |
| 806 | 2-654-475-11 | GUIDE, QUICK SET UP(US) | |
| | 2-654-475-21 | GUIDE, QUICK SET UP(FR) | |
| | 2-654-475-31 | GUIDE, QUICK SET UP(ES) | |
| 807 | 2-659-446-11 | MANUAL (WALL MOUNT INSTRUCTION) | |
| 808 | △ 1-827-924-21 | CORD, AC | |
| 809 | 1-757-319-71 | COAXIAL CABLE WITH F-PLUG | |
| 810 | 1-830-686-11 | CABLE ASSY(15PDSUBCONNECTORX2) | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|-----------------------------|------|
| 811 | 1-479-278-11 | REMOTE COMMANDER (RM-YA001) | |
| 812 | * 2-638-242-11 | CUSHION (UPPER) | |
| 813 | * 2-654-128-11 | CUSHION UPPER CENTER | |
| 814 | * 4-067-995-01 | HANDLE (E) | |
| 815 | * 2-654-423-01 | INDIVIDUAL CARTON | |
| 816 | * 2-632-670-01 | BAG, PROTECTION | |
| 817 | * 2-638-243-11 | CUSHION (LOWER) | |
| 818 | * 2-638-241-01 | TRAY | |
| 819 | * 3-674-673-01 | JOINT | |

SECTION 6

ELECTRICAL PARTS LIST

NOTE:

The components identified \triangle marked are critical for safety.
Replace only with the part number specified.

Les composants identifiés par la marque \triangle sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

When indicating parts by reference number, please include the board name.

Electrical parts list of the specified boards for board replacement service are not included in this section.
See Appendix of this manual if you need them.

- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

RESISTORS

- All resistors are in ohms
- F : nonflammable

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|-----|----------|--------------|----------------------------------|----------------|-----------|
| 1 | | A3U | CAPACITOR | | C2518 | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V | | |
| 2 | | A3U | CAPACITOR | | C2519 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 3 | | A3U | CAPACITOR | | C2520 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 4 | | A3U | CAPACITOR | | C2525 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 5 | | A3U | CAPACITOR | | C2526 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 6 | | A3U | CAPACITOR | | C2527 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 7 | | A3U | CAPACITOR | | C2528 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 8 | | A3U | CAPACITOR | | C2529 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 9 | | A3U | CAPACITOR | | C2530 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 10 | | A3U | CAPACITOR | | C2531 | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V | | |
| 11 | | A3U | CAPACITOR | | C2532 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | KLV-S26/S32A10 | |
| 12 | | A3U | CAPACITOR | | C2532 | 1-100-385-91 | CERAMIC CHIP 0.47UF 25V | KLV-S40A10 | |
| 13 | | A3U | CAPACITOR | | C2533 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 14 | | A3U | CAPACITOR | | C2534 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 15 | | A3U | CAPACITOR | | C2535 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 16 | | A3U | CAPACITOR | | C2536 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 17 | | A3U | CAPACITOR | | C2538 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 18 | | A3U | CAPACITOR | | C2539 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 19 | | A3U | CAPACITOR | | C2540 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 20 | | A3U | CAPACITOR | | C2541 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 21 | | A3U | CAPACITOR | | C2543 | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V | KLV-S26/S32A10 | |
| 22 | | A3U | CAPACITOR | | C2543 | 1-100-816-21 | ELECT CHIP 33UF 20% 10V | KLV-S40A10 | |
| 23 | | A3U | CAPACITOR | | C2544 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 24 | | A3U | CAPACITOR | | C2549 | 1-162-923-11 | CERAMIC CHIP 47PF 5.00% 50V | | |
| 25 | | A3U | CAPACITOR | | C2550 | 1-162-923-11 | CERAMIC CHIP 47PF 5.00% 50V | | |
| 26 | | A3U | CAPACITOR | | C2553 | 1-126-395-11 | ELECT CHIP 22UF 20.00% 16V | | |
| 27 | | A3U | CAPACITOR | | C2555 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 28 | | A3U | CAPACITOR | | C2801 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 29 | | A3U | CAPACITOR | | C2802 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 30 | | A3U | CAPACITOR | | C2803 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 31 | | A3U | CAPACITOR | | C2804 | 1-131-661-21 | ELECT CHIP 100UF 20% 10V | | |
| 32 | | A3U | CAPACITOR | | C2805 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 33 | | A3U | CAPACITOR | | C7002 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | | |
| 34 | | A3U | CAPACITOR | | C7005 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 35 | | A3U | CAPACITOR | | C7007 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 36 | | A3U | CAPACITOR | | C7101 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 37 | | A3U | CAPACITOR | | C7102 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 38 | | A3U | CAPACITOR | | C7107 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 39 | | A3U | CAPACITOR | | C7108 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 40 | | A3U | CAPACITOR | | C7109 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 41 | | A3U | CAPACITOR | | C7112 | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V | | |
| 42 | | A3U | CAPACITOR | | C7113 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 43 | | A3U | CAPACITOR | | C7115 | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V | | |
| 44 | | A3U | CAPACITOR | | C7116 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 45 | | A3U | CAPACITOR | | C7315 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 46 | | A3U | CAPACITOR | | C7316 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 47 | | A3U | CAPACITOR | | C7317 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 48 | | A3U | CAPACITOR | | C7318 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 49 | | A3U | CAPACITOR | | C7319 | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V | | |
| 50 | | A3U | CAPACITOR | | C7320 | 1-162-967-11 | CERAMIC CHIP 0.0033UF 10.00% 50V | | |
| 51 | | A3U | CAPACITOR | | C7321 | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V | | |
| 52 | | A3U | CAPACITOR | | C7322 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 53 | | A3U | CAPACITOR | | C7323 | 1-128-934-91 | CERAMIC CHIP 0.33UF 20% 10V | | |
| 54 | | A3U | CAPACITOR | | C7324 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 55 | | A3U | CAPACITOR | | C7325 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 56 | | A3U | CAPACITOR | | C7326 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 57 | | A3U | CAPACITOR | | C7327 | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V | | |
| 58 | | A3U | CAPACITOR | | C7328 | 1-128-934-91 | CERAMIC CHIP 0.33UF 20% 10V | | |
| 59 | | A3U | CAPACITOR | | C7329 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 60 | | A3U | CAPACITOR | | C7330 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 61 | | A3U | CAPACITOR | | C7331 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 62 | | A3U | CAPACITOR | | C7333 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 63 | | A3U | CAPACITOR | | C7334 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 64 | | A3U | CAPACITOR | | C7335 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 65 | | A3U | CAPACITOR | | C7336 | 1-126-603-11 | ELECT CHIP 4.7UF 20.00% 35V | | |
| 66 | | A3U | CAPACITOR | | C7337 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 67 | | A3U | CAPACITOR | | C7338 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 68 | | A3U | CAPACITOR | | C7339 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 69 | | A3U | CAPACITOR | | C7340 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 70 | | A3U | CAPACITOR | | C7341 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 71 | | A3U | CAPACITOR | | C7342 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 72 | | A3U | CAPACITOR | | C7343 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 73 | | A3U | CAPACITOR | | C7344 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 74 | | A3U | CAPACITOR | | C7345 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|-----|----------|--------------|----------------------------------|----------------|-----------|
| 75 | | A3U | CAPACITOR | | C7346 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 76 | | A3U | CAPACITOR | | C7347 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 77 | | A3U | CAPACITOR | | C7348 | 1-162-967-11 | CERAMIC CHIP 0.0033UF 10.00% 50V | | |
| 78 | | A3U | CAPACITOR | | C7349 | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V | | |
| 79 | | A3U | CAPACITOR | | C7350 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 80 | | A3U | CAPACITOR | | C7351 | 1-128-934-91 | CERAMIC CHIP 0.33UF 20% 10V | | |
| 81 | | A3U | CAPACITOR | | C7352 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 82 | | A3U | CAPACITOR | | C7401 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 83 | | A3U | CAPACITOR | | C7404 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 84 | | A3U | CAPACITOR | | C7406 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 85 | | A3U | CAPACITOR | | C7422 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 86 | | A3U | CAPACITOR | | C7423 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 87 | | A3U | CAPACITOR | | C7424 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 88 | | A3U | CAPACITOR | | C7425 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 89 | | A3U | CAPACITOR | | C7426 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 90 | | A3U | CAPACITOR | | C7427 | 1-126-395-11 | ELECT CHIP 22UF 20.00% 16V | | |
| 91 | | A3U | CAPACITOR | | C7428 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 92 | | A3U | CAPACITOR | | C7429 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 93 | | A3U | CAPACITOR | | C7602 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 94 | | A3U | CAPACITOR | | C7603 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 95 | | A3U | CAPACITOR | | C7604 | 1-162-919-11 | CERAMIC CHIP 22PF 5.00% 50V | | |
| 96 | | A3U | CAPACITOR | | C7605 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 97 | | A3U | CAPACITOR | | C7606 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 98 | | A3U | CAPACITOR | | C7607 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 99 | | A3U | CAPACITOR | | C7608 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 100 | | A3U | CAPACITOR | | C7609 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 101 | | A3U | CAPACITOR | | C7610 | 1-162-919-11 | CERAMIC CHIP 22PF 5.00% 50V | | |
| 102 | | A3U | CAPACITOR | | C7611 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 103 | | A3U | CAPACITOR | | C7612 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 104 | | A3U | CAPACITOR | | C7701 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | KLV-S26/S32A10 | |
| 105 | | A3U | CAPACITOR | | C7702 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | KLV-S26/S32A10 | |
| 106 | | A3U | CAPACITOR | | C7703 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | KLV-S26/S32A10 | |
| 107 | | A3U | CAPACITOR | | C7704 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | KLV-S26/S32A10 | |
| 108 | | A3U | CAPACITOR | | C7705 | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V | KLV-S26/S32A10 | |
| 109 | | A3U | CAPACITOR | | C7706 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | KLV-S26/S32A10 | |
| 110 | | A3U | CAPACITOR | | C7707 | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V | KLV-S26/S32A10 | |
| 111 | | A3U | CAPACITOR | | C7708 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | KLV-S26/S32A10 | |
| 112 | | A3U | CAPACITOR | | C7709 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S26/S32A10 | |
| 113 | | A3U | CAPACITOR | | C7710 | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V | KLV-S26/S32A10 | |
| 114 | | A3U | CAPACITOR | | C7711 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S26/S32A10 | |
| 115 | | A3U | CAPACITOR | | C7712 | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V | KLV-S26/S32A10 | |
| 116 | | A3U | CAPACITOR | | C7713 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | KLV-S26/S32A10 | |
| 117 | | A3U | CAPACITOR | | C7714 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | KLV-S26/S32A10 | |
| 118 | | A3U | CAPACITOR | | C7715 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | KLV-S26/S32A10 | |
| 119 | | A3U | CAPACITOR | | C7716 | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V | KLV-S26/S32A10 | |
| 120 | | A3U | CAPACITOR | | C7717 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | KLV-S26/S32A10 | |
| 121 | | A3U | CAPACITOR | | C7718 | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V | KLV-S26/S32A10 | |
| 122 | | A3U | CAPACITOR | | C7719 | 1-126-603-11 | ELECT CHIP 4.7UF 20.00% 35V | KLV-S26/S32A10 | |
| 123 | | A3U | CAPACITOR | | C7720 | 1-126-603-11 | ELECT CHIP 4.7UF 20.00% 35V | KLV-S26/S32A10 | |
| 124 | | A3U | CAPACITOR | | C7721 | 1-126-603-11 | ELECT CHIP 4.7UF 20.00% 35V | KLV-S26/S32A10 | |
| 125 | | A3U | CAPACITOR | | C7722 | 1-126-603-11 | ELECT CHIP 4.7UF 20.00% 35V | KLV-S26/S32A10 | |
| 126 | | A3U | CAPACITOR | | C7723 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | KLV-S26/S32A10 | |
| 127 | | A3U | CAPACITOR | | C7724 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | KLV-S26/S32A10 | |
| 128 | | A3U | CAPACITOR | | C7725 | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V | KLV-S26/S32A10 | |
| 129 | | A3U | CAPACITOR | | C7726 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 130 | | A3U | CAPACITOR | | C7727 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 131 | | A3U | CAPACITOR | | C7728 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 132 | | A3U | CAPACITOR | | C7729 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 133 | | A3U | CAPACITOR | | C7730 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 134 | | A3U | CAPACITOR | | C7731 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 135 | | A3U | CAPACITOR | | C7732 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 136 | | A3U | CAPACITOR | | C7733 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 137 | | A3U | CAPACITOR | | C7736 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | | |
| 138 | | A3U | CAPACITOR | | C7737 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | | |
| 139 | | A3U | CAPACITOR | | C7738 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | | |
| 140 | | A3U | CAPACITOR | | C7739 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | | |
| 141 | | A3U | CAPACITOR | | C7740 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 142 | | A3U | CAPACITOR | | C7741 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 143 | | A3U | CAPACITOR | | C7742 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 144 | | A3U | CAPACITOR | | C7743 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 145 | | A3U | CAPACITOR | | C7751 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 146 | | A3U | CAPACITOR | | C7752 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | KLV-S26/S32A10 | |
| 147 | | A3U | CAPACITOR | | C7752 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | KLV-S40A10 | |
| 148 | | A3U | CAPACITOR | | C7753 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | KLV-S26/S32A10 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|-----|----------|--------------|--------------------------------|----------------|-----------|
| 149 | | A3U | CAPACITOR | | C7753 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | KLV-S40A10 | |
| 150 | | A3U | CAPACITOR | | C7754 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 151 | | A3U | CAPACITOR | | C7756 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 152 | | A3U | CAPACITOR | | C7757 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 153 | | A3U | CAPACITOR | | C7758 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 154 | | A3U | CAPACITOR | | C7760 | 1-128-953-31 | ELECT 470UF 20% 25V | | |
| 155 | | A3U | CAPACITOR | | C7761 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | | |
| 156 | | A3U | CAPACITOR | | C7762 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | | |
| 157 | | A3U | CAPACITOR | | C7763 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | | |
| 158 | | A3U | CAPACITOR | | C7764 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | | |
| 159 | | A3U | CAPACITOR | | C7765 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | | |
| 160 | | A3U | CAPACITOR | | C7766 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 161 | | A3U | CAPACITOR | | C7768 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 162 | | A3U | CAPACITOR | | C7770 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 163 | | A3U | CAPACITOR | | C7771 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 164 | | A3U | CAPACITOR | | C7772 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 165 | | A3U | CAPACITOR | | C7773 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 166 | | A3U | CAPACITOR | | C7774 | 1-126-399-11 | ELECT CHIP 10UF 20.00% 35V | | |
| 167 | | A3U | CAPACITOR | | C7775 | 1-137-989-11 | CERAMIC CHIP 110PF 1% 50V | | |
| 168 | | A3U | CAPACITOR | | C7776 | 1-128-536-11 | ELECT CHIP 100UF 20.00% 25V | | |
| 169 | | A3U | CAPACITOR | | C7777 | 1-128-536-11 | ELECT CHIP 100UF 20.00% 25V | | |
| 170 | | A3U | CAPACITOR | | C7779 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 171 | | A3U | CAPACITOR | | C7780 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 172 | | A3U | CAPACITOR | | C7784 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 173 | | A3U | CAPACITOR | | C7785 | 1-128-536-11 | ELECT CHIP 100UF 20.00% 25V | | |
| 174 | | A3U | CAPACITOR | | C7786 | 1-128-536-11 | ELECT CHIP 100UF 20.00% 25V | | |
| 175 | | A3U | CAPACITOR | | C7787 | 1-128-536-11 | ELECT CHIP 100UF 20.00% 25V | | |
| 176 | | A3U | CAPACITOR | | C7788 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 177 | | A3U | CAPACITOR | | C7789 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 178 | | A3U | CAPACITOR | | C7790 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 179 | | A3U | CAPACITOR | | C7791 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 180 | | A3U | CAPACITOR | | C7792 | 1-100-912-11 | CERAMIC CHIP 1UF 10% 25V | | |
| 181 | | A3U | CAPACITOR | | C7793 | 1-100-912-11 | CERAMIC CHIP 1UF 10% 25V | | |
| 182 | | A3U | CAPACITOR | | C7794 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 183 | | A3U | CAPACITOR | | C7795 | 1-128-536-11 | ELECT CHIP 100UF 20.00% 25V | | |
| 184 | | A3U | CAPACITOR | | C7796 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 185 | | A3U | CAPACITOR | | C7797 | 1-137-989-11 | CERAMIC CHIP 110PF 1% 50V | | |
| 186 | | A3U | CAPACITOR | | C7798 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 187 | | A3U | CAPACITOR | | C7799 | 1-164-230-11 | CERAMIC CHIP 220PF 5.00% 50V | | |
| 188 | | A3U | CAPACITOR | | C7800 | 1-164-230-11 | CERAMIC CHIP 220PF 5.00% 50V | | |
| 189 | | A3U | CAPACITOR | | C7801 | 1-164-230-11 | CERAMIC CHIP 220PF 5.00% 50V | | |
| 190 | | A3U | CAPACITOR | | C7802 | 1-164-230-11 | CERAMIC CHIP 220PF 5.00% 50V | | |
| 191 | | A3U | CAPACITOR | | C7803 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 192 | | A3U | CAPACITOR | | C7804 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | | |
| 193 | | A3U | CAPACITOR | | C7805 | 1-137-980-91 | CERAMIC CHIP 0.47UF 10% 50V | | |
| 194 | | A3U | CAPACITOR | | C7806 | 1-137-980-91 | CERAMIC CHIP 0.47UF 10% 50V | | |
| 195 | | A3U | CAPACITOR | | C7807 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | | |
| 196 | | A3U | CAPACITOR | | C7808 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 197 | | A3U | CAPACITOR | | C7809 | 1-128-953-31 | ELECT 470UF 20% 25V | | |
| 198 | | A3U | CAPACITOR | | C7810 | 1-128-536-11 | ELECT CHIP 100UF 20.00% 25V | | |
| 199 | | A3U | CAPACITOR | | C8426 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 200 | | A3U | CAPACITOR | | C8427 | 1-126-404-11 | ELECT CHIP 4.7UF 20.00% 50V | | |
| 201 | | A3U | CAPACITOR | | C8435 | 1-126-404-11 | ELECT CHIP 4.7UF 20.00% 50V | | |
| 202 | | A3U | CAPACITOR | | C8436 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | | |
| 203 | | A3U | CAPACITOR | | C8501 | 1-128-526-11 | ELECT 100UF 20% 25V | | |
| 204 | | A3U | CAPACITOR | | C8502 | 1-100-911-11 | CERAMIC CHIP 4.7UF 10% 25V | | |
| 205 | | A3U | CAPACITOR | | C8503 | 1-128-953-31 | ELECT 470UF 20% 25V | | |
| 206 | | A3U | CAPACITOR | | C8505 | 1-135-372-31 | ELECT 470UF 20% 10V | KLV-S26/S32A10 | |
| 207 | | A3U | CAPACITOR | | C8505 | 1-165-723-31 | ELECT 1000UF 20% 10V | KLV-S40A10 | |
| 208 | | A3U | CAPACITOR | | C8507 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 209 | | A3U | CAPACITOR | | C8551 | 1-128-526-11 | ELECT 100UF 20% 25V | | |
| 210 | | A3U | CAPACITOR | | C8552 | 1-128-953-31 | ELECT 470UF 20% 25V | | |
| 211 | | A3U | CAPACITOR | | C8555 | 1-100-911-11 | CERAMIC CHIP 4.7UF 10% 25V | | |
| 212 | | A3U | CAPACITOR | | C8558 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 213 | | A3U | CAPACITOR | | C8561 | 1-165-723-31 | ELECT 1000UF 20% 10V | KLV-S26/S32A10 | |
| 214 | | A3U | CAPACITOR | | C8561 | 1-131-975-11 | ELECT 1200UF 20% 10V | KLV-S40A10 | |
| 215 | | A3U | CAPACITOR | | C8566 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 216 | | A3U | CAPACITOR | | C8605 | 1-126-391-11 | ELECT CHIP 47UF 20.00% 6.3V | | |
| 217 | | A3U | CAPACITOR | | C8606 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 218 | | A3U | CAPACITOR | | C8608 | 1-127-760-11 | CERAMIC CHIP 4.7UF 10% 6.3V | | |
| 219 | | A3U | CAPACITOR | | C8609 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 220 | | A3U | CAPACITOR | | C8655 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 221 | | A3U | CAPACITOR | | C8656 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 222 | | A3U | CAPACITOR | | C8658 | 1-104-652-11 | ELECT 470UF 20% 10V | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|-----|----------|--------------|---------------------------------|----------------|-----------|
| 223 | | A3U | CAPACITOR | | C8659 | 1-128-528-11 | ELECT 470UF 20% 25V | | |
| 224 | | A3U | CAPACITOR | | C8660 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 225 | | A3U | CAPACITOR | | C8662 | 1-128-528-11 | ELECT 470UF 20% 25V | KLV-S26/S32A10 | |
| 226 | | A3U | CAPACITOR | | C8662 | 1-128-950-31 | ELECT 1000UF 20% 16V | KLV-S40A10 | |
| 227 | | A3U | CAPACITOR | | C8663 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 228 | | A3U | CAPACITOR | | C9001 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 229 | | A3U | CAPACITOR | | C9002 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 230 | | A3U | CAPACITOR | | C9003 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 231 | | A3U | CAPACITOR | | C9004 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 232 | | A3U | CAPACITOR | | C9005 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 233 | | A3U | CAPACITOR | | C9006 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 234 | | A3U | CAPACITOR | | C9007 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 235 | | A3U | CAPACITOR | | C9008 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 236 | | A3U | CAPACITOR | | C9009 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 237 | | A3U | CAPACITOR | | C9010 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 238 | | A3U | CAPACITOR | | C9011 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 239 | | A3U | CAPACITOR | | C9012 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 240 | | A3U | CAPACITOR | | C9060 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 241 | | A3U | CAPACITOR | | C9061 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 242 | | A3U | CAPACITOR | | C9062 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 243 | | A3U | CAPACITOR | | C9063 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 244 | | A3U | CAPACITOR | | C9064 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 245 | | A3U | CAPACITOR | | C9065 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 246 | | A3U | CAPACITOR | | C9066 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 247 | | A3U | CAPACITOR | | C9067 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 248 | | A3U | CAPACITOR | | C9073 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 249 | | A3U | CAPACITOR | | C9074 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 250 | | A3U | CAPACITOR | | C9075 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 251 | | A3U | CAPACITOR | | C9076 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 252 | | A3U | CAPACITOR | | C9306 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 253 | | A3U | CAPACITOR | | C9307 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 254 | | A3U | CAPACITOR | | C9412 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 255 | | A3U | CONNECTOR | | CN7503 | 1-573-290-21 | PIN, CONNECTOR (1.5MM) (SMD)4P | | |
| 256 | | A3U | CONNECTOR | * | CN7750 | 1-764-250-11 | PIN, CONNECTOR (PC BOARD) 4P | | |
| 257 | | A3U | CONNECTOR | | CN8601 | 1-794-519-21 | PIN, CONNECTOR (PC BOARD) 14P | | |
| 258 | | A3U | CONNECTOR | * | CN8602 | 1-573-768-21 | PIN, CONNECTOR (1.5MM) (SMD)5P | | |
| 259 | | A3U | CONNECTOR | | CN8603 | 1-573-806-21 | PIN, CONNECTOR (1.5MM) (SMD)6P | | |
| 260 | | A3U | CONNECTOR | | CN9300 | 1-794-519-21 | PIN, CONNECTOR (PC BOARD) 14P | | |
| 261 | | A3U | CONNECTOR | | CN9401 | 1-778-652-11 | CONNECTOR, FFC (ZIF) 50P | | |
| 262 | | A3U | CONNECTOR | | CN9405 | 1-816-296-21 | PIN, CONNECTOR (PC BOARD) 9P | | |
| 263 | | A3U | CONNECTOR | * | CN9501 | 1-764-333-11 | PLUG, CONNECTOR 10P | | |
| 264 | | A3U | DIODE | | D7409 | 8-719-085-31 | DIODE MM3Z2V4T1 | | |
| 265 | | A3U | DIODE | | D7410 | 8-719-085-31 | DIODE MM3Z2V4T1 | | |
| 266 | | A3U | DIODE | | D7411 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 267 | | A3U | DIODE | | D7412 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 268 | | A3U | DIODE | | D7413 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 269 | | A3U | DIODE | | D7415 | 8-719-977-28 | DIODE DTZ10B | | |
| 270 | | A3U | DIODE | | D7416 | 8-719-977-28 | DIODE DTZ10B | | |
| 271 | | A3U | DIODE | | D7603 | 8-719-085-31 | DIODE MM3Z2V4T1 | | |
| 272 | | A3U | DIODE | | D7604 | 8-719-085-31 | DIODE MM3Z2V4T1 | | |
| 273 | | A3U | DIODE | | D7605 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 274 | | A3U | DIODE | | D7755 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 275 | | A3U | DIODE | | D7756 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 276 | | A3U | DIODE | | D7757 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 277 | | A3U | DIODE | | D7758 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 278 | | A3U | DIODE | | D7759 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 279 | | A3U | DIODE | | D7767 | 6-500-884-01 | DIODE P6SMBJ30A-5 | | |
| 280 | | A3U | DIODE | | D7768 | 6-500-884-01 | DIODE P6SMBJ30A-5 | | |
| 281 | | A3U | DIODE | | D7769 | 6-500-884-01 | DIODE P6SMBJ30A-5 | | |
| 282 | | A3U | DIODE | | D7770 | 6-500-884-01 | DIODE P6SMBJ30A-5 | | |
| 283 | | A3U | DIODE | | D7775 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 284 | | A3U | DIODE | | D7832 | 8-719-085-31 | DIODE MM3Z2V4T1 | | |
| 285 | | A3U | DIODE | | D7833 | 8-719-085-31 | DIODE MM3Z2V4T1 | | |
| 286 | | A3U | DIODE | | D8413 | 8-719-056-83 | DIODE UDZ-TE-17-6.8B | | |
| 287 | | A3U | DIODE | | D8414 | 8-719-056-82 | DIODE UDZ-TE-17-6.2B | | |
| 288 | | A3U | DIODE | | D8415 | 8-719-056-93 | DIODE UDZ-TE-17-18B | | |
| 289 | | A3U | DIODE | | D8416 | 8-719-083-52 | DIODE UDZSTE-1716B | | |
| 290 | | A3U | DIODE | | D8417 | 8-719-083-52 | DIODE UDZSTE-1716B | | |
| 291 | | A3U | DIODE | | D8501 | 8-719-073-34 | DIODE EC21QS03L-TE12L | | |
| 292 | | A3U | DIODE | | D8551 | 8-719-073-34 | DIODE EC21QS03L-TE12L | | |
| 293 | | A3U | DIODE | | D8553 | 8-719-073-34 | DIODE EC21QS03L-TE12L | | |
| 294 | | A3U | DIODE | | D8558 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 295 | | A3U | DIODE | | D8565 | 6-500-027-01 | DIODE MM3Z8V2ST1 | | |
| 296 | | A3U | DIODE | | D8567 | 8-719-081-97 | DIODE MMDL914T1 | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|--------------|-----|----------|--------------|----------------------|----------------|-----------|
| 297 | | A3U | DIODE | | D9009 | 8-719-977-28 | DIODE DTZ10B | | |
| 298 | | A3U | DIODE | | D9010 | 8-719-977-28 | DIODE DTZ10B | | |
| 299 | | A3U | DIODE | | D9011 | 8-719-977-28 | DIODE DTZ10B | | |
| 300 | | A3U | DIODE | | D9012 | 8-719-977-28 | DIODE DTZ10B | | |
| 301 | | A3U | DIODE | | D9013 | 8-719-977-28 | DIODE DTZ10B | | |
| 302 | | A3U | DIODE | | D9014 | 8-719-977-28 | DIODE DTZ10B | | |
| 303 | | A3U | DIODE | | D9015 | 8-719-977-28 | DIODE DTZ10B | | |
| 304 | | A3U | DIODE | | D9016 | 8-719-977-28 | DIODE DTZ10B | | |
| 305 | | A3U | DIODE | | D9050 | 8-719-977-28 | DIODE DTZ10B | | |
| 306 | | A3U | DIODE | | D9051 | 8-719-977-28 | DIODE DTZ10B | | |
| 307 | | A3U | DIODE | | D9052 | 8-719-977-28 | DIODE DTZ10B | | |
| 308 | | A3U | DIODE | | D9053 | 8-719-977-28 | DIODE DTZ10B | | |
| 309 | | A3U | DIODE | | D9056 | 8-719-977-28 | DIODE DTZ10B | | |
| 310 | | A3U | DIODE | | D9057 | 8-719-977-28 | DIODE DTZ10B | | |
| 311 | | A3U | DIODE | | D9302 | 8-719-977-28 | DIODE DTZ10B | | |
| 312 | | A3U | DIODE | | D9303 | 8-719-977-28 | DIODE DTZ10B | | |
| 313 | | A3U | FERRITE BEAD | | FB7750 | 1-469-185-11 | FERRITE 0UH | | |
| 314 | | A3U | FERRITE BEAD | | FB7751 | 1-469-185-11 | FERRITE 0UH | | |
| 315 | | A3U | FERRITE BEAD | | FB7752 | 1-469-185-11 | FERRITE 0UH | | |
| 316 | | A3U | FERRITE BEAD | | FB7753 | 1-469-185-11 | FERRITE 0UH | | |
| 317 | | A3U | FERRITE BEAD | | FB7754 | 1-469-185-11 | FERRITE 0UH | | |
| 318 | | A3U | FERRITE BEAD | | FB7755 | 1-469-185-11 | FERRITE 0UH | | |
| 319 | | A3U | FERRITE BEAD | | FB7756 | 1-469-185-11 | FERRITE 0UH | | |
| 320 | | A3U | FERRITE BEAD | | FB7757 | 1-469-185-11 | FERRITE 0UH | | |
| 321 | | A3U | FERRITE BEAD | | FB8501 | 1-469-775-21 | FERRITE 0UH | | |
| 322 | | A3U | FERRITE BEAD | | FB8552 | 1-469-775-21 | FERRITE 0UH | | |
| 323 | | A3U | FERRITE BEAD | | FB8601 | 1-469-775-21 | FERRITE 0UH | | |
| 324 | | A3U | FERRITE BEAD | | FB8602 | 1-469-775-21 | FERRITE 0UH | | |
| 325 | | A3U | FERRITE BEAD | | FB8603 | 1-469-775-21 | FERRITE 0UH | | |
| 326 | | A3U | FERRITE BEAD | | FB8605 | 1-469-775-21 | FERRITE 0UH | | |
| 327 | | A3U | FERRITE BEAD | | FB8606 | 1-469-775-21 | FERRITE 0UH | | |
| 328 | | A3U | FERRITE BEAD | | FB8607 | 1-414-760-21 | FERRITE 0UH | | |
| 329 | | A3U | FERRITE BEAD | | FB8608 | 1-400-915-21 | FERRITE 0UH | | |
| 330 | | A3U | FERRITE BEAD | | FB8609 | 1-414-445-11 | FERRITE 0UH | | |
| 331 | | A3U | FERRITE BEAD | | FB8610 | 1-414-445-11 | FERRITE 0UH | | |
| 332 | | A3U | FERRITE BEAD | | FB8611 | 1-414-445-11 | FERRITE 0UH | | |
| 333 | | A3U | FERRITE BEAD | | FB8620 | 1-469-775-21 | FERRITE 0UH | | |
| 334 | | A3U | FERRITE BEAD | | FB8622 | 1-414-445-11 | FERRITE 0UH | | |
| 335 | | A3U | FERRITE BEAD | | FB8651 | 1-469-775-21 | FERRITE 0UH | | |
| 336 | | A3U | IC | | IC2505 | 8-753-204-12 | IC CXA2209Q-T6 | KLV-S26/S32A10 | |
| 337 | | A3U | IC | | IC2505 | 8-753-232-63 | IC CXA2229Q-T6 | KLV-S40A10 | |
| 338 | | A3U | IC | | IC7001 | 8-759-460-79 | IC BA09FP-E2 | | |
| 339 | | A3U | IC | | IC7103 | 8-752-107-98 | IC CXA2188Q-T4 | | |
| 340 | | A3U | IC | | IC7301 | 6-707-724-01 | IC NJW1149AFH1 | | |
| 341 | | A3U | IC | | IC7404 | 6-705-679-01 | IC RC4558PWR | | |
| 342 | | A3U | IC | | IC7405 | 6-703-042-01 | IC CD4052BNSR | | |
| 343 | | A3U | IC | | IC7601 | 8-759-359-49 | IC NJM3414AV(TE2) | | |
| 344 | | A3U | IC | | IC7701 | 8-759-972-97 | IC BA3U823LS | KLV-S26/S32A10 | |
| 345 | | A3U | IC | | IC7702 | 8-759-278-58 | IC NJM4558V-TE2 | | |
| 346 | | A3U | IC | | IC7703 | 8-759-836-72 | IC NJM2521V(TE2) | | |
| 347 | | A3U | IC | | IC7704 | 8-759-836-72 | IC NJM2521V(TE2) | | |
| 348 | | A3U | IC | | IC7750 | 6-705-679-01 | IC RC4558PWR | | |
| 349 | | A3U | IC | | IC7802 | 6-707-708-01 | IC TPA3U004D2PHPR | | |
| 350 | | A3U | IC | | IC8501 | 6-704-407-01 | IC PQ1CZ41H2ZPH | | |
| 351 | | A3U | IC | | IC8552 | 6-702-142-01 | IC PQ1CY1032ZP | | |
| 352 | | A3U | IC | | IC8652 | 8-759-592-79 | IC BA00AST-V5 | | |
| 353 | | A3U | IC | | IC8653 | 8-759-592-79 | IC BA00AST-V5 | | |
| 354 | | A3U | JACK | | J9001 | 1-815-015-11 | JACK BLOCK, PIN | | |
| 355 | | A3U | JACK | | J9002 | 1-780-243-11 | TERMINAL BLOCK, S 6P | | |
| 356 | | A3U | JACK | | J9004 | 1-793-725-11 | JACK BLOCK, PIN 2P | | |
| 357 | | A3U | JACK | | J9011 | 1-507-792-00 | JACK | | |
| 358 | | A3U | COIL | | L2501 | 1-412-058-11 | INDUCTOR 10UH | | |
| 359 | | A3U | COIL | | L2502 | 1-412-058-11 | INDUCTOR 10UH | | |
| 360 | | A3U | COIL | | L2503 | 1-412-058-11 | INDUCTOR 10UH | | |
| 361 | | A3U | COIL | | L2504 | 1-412-058-11 | INDUCTOR 10UH | | |
| 362 | | A3U | COIL | | L2801 | 1-412-030-11 | INDUCTOR 22UH | | |
| 363 | | A3U | COIL | | L2802 | 1-412-030-11 | INDUCTOR 22UH | | |
| 364 | | A3U | COIL | | L2803 | 1-412-030-11 | INDUCTOR 22UH | | |
| 365 | | A3U | COIL | | L2804 | 1-412-030-11 | INDUCTOR 22UH | | |
| 366 | | A3U | COIL | | L7001 | 1-412-549-31 | INDUCTOR 1MH | | |
| 367 | | A3U | COIL | | L7401 | 1-412-058-11 | INDUCTOR 10UH | | |
| 368 | | A3U | COIL | | L7750 | 1-419-823-21 | INDUCTOR 33UH | | |
| 369 | | A3U | COIL | | L7751 | 1-419-823-21 | INDUCTOR 33UH | | |
| 370 | | A3U | COIL | | L7752 | 1-419-823-21 | INDUCTOR 33UH | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|------------|-----|----------|--------------|-----------------------------|----------------|-----------|
| 371 | | A3U | COIL | | L7753 | 1-419-823-21 | INDUCTOR 33UH | | |
| 372 | | A3U | COIL | | L7801 | 1-406-977-61 | INDUCTOR 100UH | | |
| 373 | | A3U | COIL | | L8501 | 1-412-525-31 | INDUCTOR 10UH | | |
| 374 | | A3U | COIL | | L8502 | 1-456-786-21 | INDUCTOR 47UH | | |
| 375 | | A3U | COIL | | L8551 | 1-412-525-31 | INDUCTOR 10UH | | |
| 376 | | A3U | COIL | | L8553 | 1-424-976-21 | INDUCTOR 47UH | | |
| 377 | | A3U | COIL | | L9400 | 1-424-922-21 | INDUCTOR 10UH | | |
| 378 | | A3U | IC LINK | △ | PS7754 | 1-576-873-11 | IC LINK 3.15A 35V | | |
| 379 | | A3U | IC LINK | △ | PS8401 | 1-576-646-11 | FUSE 0.5A 50V | | |
| 380 | | A3U | IC LINK | △ | PS8501 | 1-533-593-42 | IC LINK 2A 90V | | |
| 381 | | A3U | IC LINK | △ | PS8551 | 1-533-595-42 | IC LINK 3.15A 90V | | |
| 382 | | A3U | TRANSISTOR | | Q2503 | 8-729-905-35 | TRANSISTOR 2SC4081-R | | |
| 383 | | A3U | TRANSISTOR | | Q2504 | 8-729-905-35 | TRANSISTOR 2SC4081-R | | |
| 384 | | A3U | TRANSISTOR | | Q2507 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | | |
| 385 | | A3U | TRANSISTOR | | Q2508 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | | |
| 386 | | A3U | TRANSISTOR | | Q2509 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | | |
| 387 | | A3U | TRANSISTOR | | Q2512 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | | |
| 388 | | A3U | TRANSISTOR | | Q2513 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | | |
| 389 | | A3U | TRANSISTOR | | Q2514 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | | |
| 390 | | A3U | TRANSISTOR | | Q2801 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 391 | | A3U | TRANSISTOR | | Q2802 | 6-550-586-01 | TRANSISTOR 2PA1576R-115 | | |
| 392 | | A3U | TRANSISTOR | | Q7001 | 8-729-029-00 | TRANSISTOR DTC115EUA-T106 | | |
| 393 | | A3U | TRANSISTOR | | Q7406 | 8-729-920-21 | TRANSISTOR DTC314TK-T-146 | | |
| 394 | | A3U | TRANSISTOR | | Q7407 | 8-729-920-21 | TRANSISTOR DTC314TK-T-146 | | |
| 395 | | A3U | TRANSISTOR | | Q7411 | 8-729-905-35 | TRANSISTOR 2SC4081-R | | |
| 396 | | A3U | TRANSISTOR | | Q7413 | 6-550-076-01 | TRANSISTOR MUN5213T1 | | |
| 397 | | A3U | TRANSISTOR | | Q7601 | 6-550-076-01 | TRANSISTOR MUN5213T1 | | |
| 398 | | A3U | TRANSISTOR | | Q7602 | 8-729-905-35 | TRANSISTOR 2SC4081-R | | |
| 399 | | A3U | TRANSISTOR | | Q7605 | 8-729-015-39 | TRANSISTOR DTC323TK | | |
| 400 | | A3U | TRANSISTOR | | Q7606 | 8-729-920-21 | TRANSISTOR DTC314TK-T-146 | | |
| 401 | | A3U | TRANSISTOR | | Q7607 | 8-729-920-21 | TRANSISTOR DTC314TK-T-146 | | |
| 402 | | A3U | TRANSISTOR | | Q7608 | 8-729-920-21 | TRANSISTOR DTC314TK-T-146 | | |
| 403 | | A3U | TRANSISTOR | | Q7740 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | | |
| 404 | | A3U | TRANSISTOR | | Q7741 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | | |
| 405 | | A3U | TRANSISTOR | | Q7742 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | | |
| 406 | | A3U | TRANSISTOR | | Q7743 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | | |
| 407 | | A3U | TRANSISTOR | | Q7744 | 8-729-905-35 | TRANSISTOR 2SC4081-R | | |
| 408 | | A3U | TRANSISTOR | | Q7752 | 8-729-920-21 | TRANSISTOR DTC314TK-T-146 | | |
| 409 | | A3U | TRANSISTOR | | Q7753 | 8-729-920-21 | TRANSISTOR DTC314TK-T-146 | | |
| 410 | | A3U | TRANSISTOR | | Q7754 | 6-550-076-01 | TRANSISTOR MUN5213T1 | | |
| 411 | | A3U | TRANSISTOR | | Q7755 | 6-550-076-01 | TRANSISTOR MUN5213T1 | | |
| 412 | | A3U | TRANSISTOR | | Q7757 | 6-550-076-01 | TRANSISTOR MUN5213T1 | | |
| 413 | | A3U | TRANSISTOR | | Q7758 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | | |
| 414 | | A3U | TRANSISTOR | | Q8403 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | | |
| 415 | | A3U | TRANSISTOR | | Q8404 | 8-729-905-35 | TRANSISTOR 2SC4081-R | | |
| 416 | | A3U | TRANSISTOR | | Q8405 | 8-729-905-35 | TRANSISTOR 2SC4081-R | | |
| 417 | | A3U | TRANSISTOR | | Q8552 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 418 | | A3U | TRANSISTOR | | Q8560 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 419 | | A3U | TRANSISTOR | | Q8561 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 420 | | A3U | TRANSISTOR | | Q8562 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 421 | | A3U | TRANSISTOR | | Q8563 | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX | | |
| 422 | | A3U | TRANSISTOR | | Q8601 | 8-729-029-00 | TRANSISTOR DTC115EUA-T106 | | |
| 423 | | A3U | TRANSISTOR | | Q8615 | 8-729-905-35 | TRANSISTOR 2SC4081-R | | |
| 424 | | A3U | TRANSISTOR | | Q8616 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 425 | | A3U | RESISTOR | | R2501 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 426 | | A3U | RESISTOR | | R2502 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 427 | | A3U | RESISTOR | | R2506 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 428 | | A3U | RESISTOR | | R2507 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 429 | | A3U | RESISTOR | | R2508 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 430 | | A3U | RESISTOR | | R2510 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 431 | | A3U | RESISTOR | | R2514 | 1-216-806-11 | METAL CHIP 56 5% 1/10W | | |
| 432 | | A3U | RESISTOR | | R2515 | 1-216-806-11 | METAL CHIP 56 5% 1/10W | | |
| 433 | | A3U | RESISTOR | | R2516 | 1-216-806-11 | METAL CHIP 56 5% 1/10W | | |
| 434 | | A3U | RESISTOR | | R2532 | 1-216-820-11 | METAL CHIP 820 5% 1/10W | | |
| 435 | | A3U | RESISTOR | | R2533 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 436 | | A3U | RESISTOR | | R2534 | 1-216-820-11 | METAL CHIP 820 5% 1/10W | | |
| 437 | | A3U | RESISTOR | | R2536 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 438 | | A3U | RESISTOR | | R2537 | 1-216-820-11 | METAL CHIP 820 5% 1/10W | | |
| 439 | | A3U | RESISTOR | | R2540 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 440 | | A3U | RESISTOR | | R2546 | 1-216-843-11 | METAL CHIP 68K 5% 1/10W | | |
| 441 | | A3U | RESISTOR | | R2550 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 442 | | A3U | RESISTOR | | R2552 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | KLV-S26/S32A10 | |
| 443 | | A3U | RESISTOR | | R2552 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S40A10 | |
| 444 | | A3U | RESISTOR | | R2554 | 1-216-820-11 | METAL CHIP 820 5% 1/10W | | |

| No. | # | Board | Type | Δ/\ast | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|---------------|----------|--------------|----------------------------|------------|-----------|
| 445 | | A3U | RESISTOR | | R2555 | 1-218-285-11 | METAL CHIP 75 5% 1/10W | | |
| 446 | | A3U | RESISTOR | | R2556 | 1-216-820-11 | METAL CHIP 820 5% 1/10W | | |
| 447 | | A3U | RESISTOR | | R2559 | 1-216-843-11 | METAL CHIP 68K 5% 1/10W | | |
| 448 | | A3U | RESISTOR | | R2560 | 1-218-285-11 | METAL CHIP 75 5% 1/10W | | |
| 449 | | A3U | RESISTOR | | R2562 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 450 | | A3U | RESISTOR | | R2564 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 451 | | A3U | RESISTOR | | R2565 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 452 | | A3U | RESISTOR | | R2567 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 453 | | A3U | RESISTOR | | R2568 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 454 | | A3U | RESISTOR | | R2569 | 1-216-861-11 | METAL CHIP 2.2M 5% 1/10W | | |
| 455 | | A3U | RESISTOR | | R2573 | 1-216-861-11 | METAL CHIP 2.2M 5% 1/10W | | |
| 456 | | A3U | RESISTOR | | R2577 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 457 | | A3U | RESISTOR | | R2578 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 458 | | A3U | RESISTOR | | R2579 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 459 | | A3U | RESISTOR | | R2580 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 460 | | A3U | RESISTOR | | R2581 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 461 | | A3U | RESISTOR | | R2582 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 462 | | A3U | RESISTOR | | R2583 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 463 | | A3U | RESISTOR | | R2596 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 464 | | A3U | RESISTOR | | R2597 | 1-216-815-11 | METAL CHIP 330 5% 1/10W | | |
| 465 | | A3U | RESISTOR | | R2801 | 1-218-849-11 | METAL CHIP 1.2K 0.5% 1/10W | | |
| 466 | | A3U | RESISTOR | | R2802 | 1-218-851-11 | METAL CHIP 1.5K 0.5% 1/10W | | |
| 467 | | A3U | RESISTOR | | R2803 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 468 | | A3U | RESISTOR | | R2804 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 469 | | A3U | RESISTOR | | R2805 | 1-216-864-11 | SHORT CHIP 0 | | |
| 470 | | A3U | RESISTOR | | R2806 | 1-218-689-11 | METAL CHIP 750 0.5% 1/10W | | |
| 471 | | A3U | RESISTOR | | R2807 | 1-216-864-11 | SHORT CHIP 0 | | |
| 472 | | A3U | RESISTOR | | R7002 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 473 | | A3U | RESISTOR | | R7003 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 474 | | A3U | RESISTOR | | R7004 | 1-216-864-11 | SHORT CHIP 0 | | |
| 475 | | A3U | RESISTOR | | R7007 | 1-216-864-11 | SHORT CHIP 0 | | |
| 476 | | A3U | RESISTOR | | R7008 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 477 | | A3U | RESISTOR | | R7028 | 1-216-864-11 | SHORT CHIP 0 | | |
| 478 | | A3U | RESISTOR | | R7030 | 1-216-864-11 | SHORT CHIP 0 | | |
| 479 | | A3U | RESISTOR | | R7031 | 1-216-864-11 | SHORT CHIP 0 | | |
| 480 | | A3U | RESISTOR | | R7032 | 1-216-864-11 | SHORT CHIP 0 | | |
| 481 | | A3U | RESISTOR | | R7033 | 1-216-864-11 | SHORT CHIP 0 | | |
| 482 | | A3U | RESISTOR | | R7034 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 483 | | A3U | RESISTOR | | R7035 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 484 | | A3U | RESISTOR | | R7036 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 485 | | A3U | RESISTOR | | R7101 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 486 | | A3U | RESISTOR | | R7102 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 487 | | A3U | RESISTOR | | R7103 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 488 | | A3U | RESISTOR | | R7104 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 489 | | A3U | RESISTOR | | R7105 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 490 | | A3U | RESISTOR | | R7106 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 491 | | A3U | RESISTOR | | R7107 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 492 | | A3U | RESISTOR | | R7108 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 493 | | A3U | RESISTOR | | R7113 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 494 | | A3U | RESISTOR | | R7114 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 495 | | A3U | RESISTOR | | R7117 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 496 | | A3U | RESISTOR | | R7118 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 497 | | A3U | RESISTOR | | R7122 | 1-216-864-11 | SHORT CHIP 0 | | |
| 498 | | A3U | RESISTOR | | R7123 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 499 | | A3U | RESISTOR | | R7124 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 500 | | A3U | RESISTOR | | R7125 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 501 | | A3U | RESISTOR | | R7126 | 1-216-864-11 | SHORT CHIP 0 | | |
| 502 | | A3U | RESISTOR | | R7127 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 503 | | A3U | RESISTOR | | R7313 | 1-218-856-11 | METAL CHIP 2.4K 0.5% 1/10W | | |
| 504 | | A3U | RESISTOR | | R7314 | 1-218-856-11 | METAL CHIP 2.4K 0.5% 1/10W | | |
| 505 | | A3U | RESISTOR | | R7315 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 506 | | A3U | RESISTOR | | R7316 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 507 | | A3U | RESISTOR | | R7317 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 508 | | A3U | RESISTOR | | R7318 | 1-216-864-11 | SHORT CHIP 0 | | |
| 509 | | A3U | RESISTOR | | R7320 | 1-218-292-11 | METAL CHIP 20K 5% 1/10W | | |
| 510 | | A3U | RESISTOR | | R7321 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 511 | | A3U | RESISTOR | | R7322 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 512 | | A3U | RESISTOR | | R7323 | 1-218-292-11 | METAL CHIP 20K 5% 1/10W | | |
| 513 | | A3U | RESISTOR | | R7324 | 1-218-292-11 | METAL CHIP 20K 5% 1/10W | | |
| 514 | | A3U | RESISTOR | | R7325 | 1-216-864-11 | SHORT CHIP 0 | | |
| 515 | | A3U | RESISTOR | | R7401 | 1-218-873-11 | METAL CHIP 12K 0.5% 1/10W | | |
| 516 | | A3U | RESISTOR | | R7402 | 1-218-875-11 | METAL CHIP 15K 0.5% 1/10W | | |
| 517 | | A3U | RESISTOR | | R7409 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 518 | | A3U | RESISTOR | | R7412 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |

| No. | # | Board | Type | Δ/\ast | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|---------------|----------|--------------|----------------------------|----------------|-----------|
| 519 | | A3U | RESISTOR | | R7423 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 520 | | A3U | RESISTOR | | R7424 | 1-218-889-11 | METAL CHIP 56K 0.5% 1/10W | | |
| 521 | | A3U | RESISTOR | | R7425 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 522 | | A3U | RESISTOR | | R7431 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 523 | | A3U | RESISTOR | | R7432 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 524 | | A3U | RESISTOR | | R7437 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 525 | | A3U | RESISTOR | | R7438 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 526 | | A3U | RESISTOR | | R7439 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 527 | | A3U | RESISTOR | | R7440 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 528 | | A3U | RESISTOR | | R7443 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 529 | | A3U | RESISTOR | | R7445 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 530 | | A3U | RESISTOR | | R7447 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 531 | | A3U | RESISTOR | | R7451 | 1-216-864-11 | SHORT CHIP 0 | | |
| 532 | | A3U | RESISTOR | | R7452 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 533 | | A3U | RESISTOR | | R7453 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 534 | | A3U | RESISTOR | | R7454 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 535 | | A3U | RESISTOR | | R7455 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 536 | | A3U | RESISTOR | | R7456 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 537 | | A3U | RESISTOR | | R7459 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 538 | | A3U | RESISTOR | | R7460 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 539 | | A3U | RESISTOR | | R7601 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 540 | | A3U | RESISTOR | | R7603 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 541 | | A3U | RESISTOR | | R7604 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 542 | | A3U | RESISTOR | | R7606 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 543 | | A3U | RESISTOR | | R7607 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 544 | | A3U | RESISTOR | | R7608 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 545 | | A3U | RESISTOR | | R7609 | 1-218-873-11 | METAL CHIP 12K 0.5% 1/10W | | |
| 546 | | A3U | RESISTOR | | R7610 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 547 | | A3U | RESISTOR | | R7611 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 548 | | A3U | RESISTOR | | R7612 | 1-216-839-11 | METAL CHIP 33K 5% 1/10W | | |
| 549 | | A3U | RESISTOR | | R7613 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 550 | | A3U | RESISTOR | | R7614 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 551 | | A3U | RESISTOR | | R7615 | 1-216-839-11 | METAL CHIP 33K 5% 1/10W | | |
| 552 | | A3U | RESISTOR | | R7616 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 553 | | A3U | RESISTOR | | R7617 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 554 | | A3U | RESISTOR | | R7619 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 555 | | A3U | RESISTOR | | R7620 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 556 | | A3U | RESISTOR | | R7621 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 557 | | A3U | RESISTOR | | R7622 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 558 | | A3U | RESISTOR | | R7623 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 559 | | A3U | RESISTOR | | R7624 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 560 | | A3U | RESISTOR | | R7625 | 1-216-864-11 | SHORT CHIP 0 | | |
| 561 | | A3U | RESISTOR | | R7626 | 1-216-864-11 | SHORT CHIP 0 | | |
| 562 | | A3U | RESISTOR | | R7627 | 1-216-864-11 | SHORT CHIP 0 | | |
| 563 | | A3U | RESISTOR | | R7628 | 1-216-864-11 | SHORT CHIP 0 | | |
| 564 | | A3U | RESISTOR | | R7629 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 565 | | A3U | RESISTOR | | R7701 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 566 | | A3U | RESISTOR | | R7702 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 567 | | A3U | RESISTOR | | R7703 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 568 | | A3U | RESISTOR | | R7704 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 569 | | A3U | RESISTOR | | R7705 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 570 | | A3U | RESISTOR | | R7706 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 571 | | A3U | RESISTOR | | R7707 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 572 | | A3U | RESISTOR | | R7708 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 573 | | A3U | RESISTOR | | R7709 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 574 | | A3U | RESISTOR | | R7710 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 575 | | A3U | RESISTOR | | R7711 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 576 | | A3U | RESISTOR | | R7712 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 577 | | A3U | RESISTOR | | R7713 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 578 | | A3U | RESISTOR | | R7714 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 579 | | A3U | RESISTOR | | R7715 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 580 | | A3U | RESISTOR | | R7716 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 581 | | A3U | RESISTOR | | R7717 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 582 | | A3U | RESISTOR | | R7718 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 583 | | A3U | RESISTOR | | R7719 | 1-218-835-11 | METAL CHIP 330 0.5% 1/10W | KLV-S26/S32A10 | |
| 584 | | A3U | RESISTOR | | R7720 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 585 | | A3U | RESISTOR | | R7721 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | KLV-S26/S32A10 | |
| 586 | | A3U | RESISTOR | | R7722 | 1-218-835-11 | METAL CHIP 330 0.5% 1/10W | KLV-S26/S32A10 | |
| 587 | | A3U | RESISTOR | | R7726 | 1-218-873-11 | METAL CHIP 12K 0.5% 1/10W | | |
| 588 | | A3U | RESISTOR | | R7727 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 589 | | A3U | RESISTOR | | R7728 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 590 | | A3U | RESISTOR | | R7729 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 591 | | A3U | RESISTOR | | R7730 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 592 | | A3U | RESISTOR | | R7731 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |

| No. | # | Board | Type | Δ/\ast | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|---------------|----------|--------------|----------------------------|----------------|-----------|
| 593 | | A3U | RESISTOR | | R7732 | 1-218-865-11 | METAL CHIP 5.6K 0.5% 1/10W | | |
| 594 | | A3U | RESISTOR | | R7733 | 1-218-865-11 | METAL CHIP 5.6K 0.5% 1/10W | | |
| 595 | | A3U | RESISTOR | | R7734 | 1-218-859-11 | METAL CHIP 3.3K 0.5% 1/10W | | |
| 596 | | A3U | RESISTOR | | R7735 | 1-218-859-11 | METAL CHIP 3.3K 0.5% 1/10W | | |
| 597 | | A3U | RESISTOR | | R7736 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 598 | | A3U | RESISTOR | | R7738 | 1-216-864-11 | SHORT CHIP 0 | KLV-S26/S32A10 | |
| 599 | | A3U | RESISTOR | | R7738 | 1-218-861-11 | METAL CHIP 3.9K 0.5% 1/10W | KLV-S40A10 | |
| 600 | | A3U | RESISTOR | | R7739 | 1-216-864-11 | SHORT CHIP 0 | KLV-S26/S32A10 | |
| 601 | | A3U | RESISTOR | | R7739 | 1-218-861-11 | METAL CHIP 3.9K 0.5% 1/10W | KLV-S40A10 | |
| 602 | | A3U | RESISTOR | | R7740 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S26/S32A10 | |
| 603 | | A3U | RESISTOR | | R7740 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | KLV-S40A10 | |
| 604 | | A3U | RESISTOR | | R7741 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 605 | | A3U | RESISTOR | | R7742 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 606 | | A3U | RESISTOR | | R7743 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 607 | | A3U | RESISTOR | | R7744 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 608 | | A3U | RESISTOR | | R7747 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | KLV-S26/S32A10 | |
| 609 | | A3U | RESISTOR | | R7748 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | KLV-S26/S32A10 | |
| 610 | | A3U | RESISTOR | | R7749 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S26/S32A10 | |
| 611 | | A3U | RESISTOR | | R7749 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | KLV-S40A10 | |
| 612 | | A3U | RESISTOR | | R7759 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 613 | | A3U | RESISTOR | | R7760 | 1-218-865-11 | METAL CHIP 5.6K 0.5% 1/10W | | |
| 614 | | A3U | RESISTOR | | R7761 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 615 | | A3U | RESISTOR | | R7762 | 1-218-873-11 | METAL CHIP 12K 0.5% 1/10W | | |
| 616 | | A3U | RESISTOR | | R7763 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 617 | | A3U | RESISTOR | | R7764 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 618 | | A3U | RESISTOR | | R7765 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 619 | | A3U | RESISTOR | | R7766 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 620 | | A3U | RESISTOR | | R7767 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | | |
| 621 | | A3U | RESISTOR | | R7768 | 1-218-869-11 | METAL CHIP 8.2K 0.5% 1/10W | | |
| 622 | | A3U | RESISTOR | | R7769 | 1-218-869-11 | METAL CHIP 8.2K 0.5% 1/10W | | |
| 623 | | A3U | RESISTOR | | R7770 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | | |
| 624 | | A3U | RESISTOR | | R7771 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 625 | | A3U | RESISTOR | | R7772 | 1-218-861-11 | METAL CHIP 3.9K 0.5% 1/10W | KLV-S26/S32A10 | |
| 626 | | A3U | RESISTOR | | R7772 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | KLV-S40A10 | |
| 627 | | A3U | RESISTOR | | R7773 | 1-218-861-11 | METAL CHIP 3.9K 0.5% 1/10W | KLV-S26/S32A10 | |
| 628 | | A3U | RESISTOR | | R7773 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | KLV-S40A10 | |
| 629 | | A3U | RESISTOR | | R7774 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 630 | | A3U | RESISTOR | | R7775 | 1-218-875-11 | METAL CHIP 15K 0.5% 1/10W | KLV-S26/S32A10 | |
| 631 | | A3U | RESISTOR | | R7775 | 1-218-891-11 | METAL CHIP 68K 0.5% 1/10W | KLV-S40A10 | |
| 632 | | A3U | RESISTOR | | R7776 | 1-218-875-11 | METAL CHIP 15K 0.5% 1/10W | KLV-S26/S32A10 | |
| 633 | | A3U | RESISTOR | | R7776 | 1-218-891-11 | METAL CHIP 68K 0.5% 1/10W | KLV-S40A10 | |
| 634 | | A3U | RESISTOR | | R7777 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 635 | | A3U | RESISTOR | | R7787 | 1-216-864-11 | SHORT CHIP 0 | | |
| 636 | | A3U | RESISTOR | | R7789 | 1-216-864-11 | SHORT CHIP 0 | | |
| 637 | | A3U | RESISTOR | | R7790 | 1-218-875-11 | METAL CHIP 15K 0.5% 1/10W | KLV-S26/S32A10 | |
| 638 | | A3U | RESISTOR | | R7790 | 1-218-874-11 | METAL CHIP 13K 0.5% 1/10W | KLV-S40A10 | |
| 639 | | A3U | RESISTOR | | R7791 | 1-218-879-11 | METAL CHIP 22K 0.5% 1/10W | KLV-S26/S32A10 | |
| 640 | | A3U | RESISTOR | | R7791 | 1-218-878-11 | METAL CHIP 20K 0.5% 1/10W | KLV-S40A10 | |
| 641 | | A3U | RESISTOR | | R7792 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 642 | | A3U | RESISTOR | | R7793 | 1-216-864-11 | SHORT CHIP 0 | | |
| 643 | | A3U | RESISTOR | | R7794 | 1-216-864-11 | SHORT CHIP 0 | | |
| 644 | | A3U | RESISTOR | | R7795 | 1-216-864-11 | SHORT CHIP 0 | | |
| 645 | | A3U | RESISTOR | | R7796 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 646 | | A3U | RESISTOR | | R7799 | 1-216-864-11 | SHORT CHIP 0 | | |
| 647 | | A3U | RESISTOR | | R7800 | 1-216-864-11 | SHORT CHIP 0 | | |
| 648 | | A3U | RESISTOR | | R7801 | 1-216-864-11 | SHORT CHIP 0 | | |
| 649 | | A3U | RESISTOR | | R7802 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 650 | | A3U | RESISTOR | | R7803 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 651 | | A3U | RESISTOR | | R7804 | 1-218-897-11 | METAL CHIP 120K 0.5% 1/10W | | |
| 652 | | A3U | RESISTOR | | R7805 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 653 | | A3U | RESISTOR | | R7806 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 654 | | A3U | RESISTOR | | R7807 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 655 | | A3U | RESISTOR | | R7808 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 656 | | A3U | RESISTOR | | R7809 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 657 | | A3U | RESISTOR | | R7810 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 658 | | A3U | RESISTOR | | R7811 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 659 | | A3U | RESISTOR | | R7812 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 660 | | A3U | RESISTOR | | R7813 | 1-216-864-11 | SHORT CHIP 0 | | |
| 661 | | A3U | RESISTOR | | R7814 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 662 | | A3U | RESISTOR | | R7831 | 1-216-864-11 | SHORT CHIP 0 | | |
| 663 | | A3U | RESISTOR | | R8433 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 664 | | A3U | RESISTOR | | R8434 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 665 | | A3U | RESISTOR | | R8436 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 666 | | A3U | RESISTOR | | R8441 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |

| No. | # | Board | Type | Δ/\ast | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|---------------|----------|--------------|----------------------------|-----------|-----------|
| 667 | | A3U | RESISTOR | | R8442 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 668 | | A3U | RESISTOR | | R8443 | 1-216-864-11 | SHORT CHIP 0 | | |
| 669 | | A3U | RESISTOR | | R8445 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 670 | | A3U | RESISTOR | | R8446 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 671 | | A3U | RESISTOR | | R8501 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 672 | | A3U | RESISTOR | | R8503 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 673 | | A3U | RESISTOR | | R8504 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 674 | | A3U | RESISTOR | | R8505 | 1-218-849-11 | METAL CHIP 1.2K 0.5% 1/10W | | |
| 675 | | A3U | RESISTOR | | R8550 | 1-216-864-11 | SHORT CHIP 0 | | |
| 676 | | A3U | RESISTOR | | R8553 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 677 | | A3U | RESISTOR | | R8560 | 1-218-865-11 | METAL CHIP 5.6K 0.5% 1/10W | | |
| 678 | | A3U | RESISTOR | | R8561 | 1-218-857-11 | METAL CHIP 2.7K 0.5% 1/10W | | |
| 679 | | A3U | RESISTOR | | R8565 | 1-218-889-11 | METAL CHIP 56K 0.5% 1/10W | | |
| 680 | | A3U | RESISTOR | | R8569 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 681 | | A3U | RESISTOR | | R8572 | 1-216-864-11 | SHORT CHIP 0 | | |
| 682 | | A3U | RESISTOR | | R8582 | 1-216-864-11 | SHORT CHIP 0 | | |
| 683 | | A3U | RESISTOR | | R8586 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 684 | | A3U | RESISTOR | | R8587 | 1-216-843-11 | METAL CHIP 68K 5% 1/10W | | |
| 685 | | A3U | RESISTOR | | R8588 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 686 | | A3U | RESISTOR | | R8589 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 687 | | A3U | RESISTOR | | R8590 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 688 | | A3U | RESISTOR | | R8591 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 689 | | A3U | RESISTOR | | R8592 | 1-216-864-11 | SHORT CHIP 0 | | |
| 690 | | A3U | RESISTOR | | R8594 | 1-218-861-11 | METAL CHIP 3.9K 0.5% 1/10W | | |
| 691 | | A3U | RESISTOR | | R8605 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 692 | | A3U | RESISTOR | | R8606 | 1-216-864-11 | SHORT CHIP 0 | | |
| 693 | | A3U | RESISTOR | | R8610 | 1-216-864-11 | SHORT CHIP 0 | | |
| 694 | | A3U | RESISTOR | | R8613 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 695 | | A3U | RESISTOR | | R8614 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 696 | | A3U | RESISTOR | | R8615 | 1-218-712-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 697 | | A3U | RESISTOR | | R8616 | 1-218-712-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 698 | | A3U | RESISTOR | | R8617 | 1-218-688-11 | METAL CHIP 680 0.5% 1/10W | | |
| 699 | | A3U | RESISTOR | | R8618 | 1-218-688-11 | METAL CHIP 680 0.5% 1/10W | | |
| 700 | | A3U | RESISTOR | | R8619 | 1-216-843-11 | METAL CHIP 68K 5% 1/10W | | |
| 701 | | A3U | RESISTOR | | R8620 | 1-216-851-11 | METAL CHIP 330K 5% 1/10W | | |
| 702 | | A3U | RESISTOR | | R8622 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 703 | | A3U | RESISTOR | | R8623 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 704 | | A3U | RESISTOR | | R8624 | 1-216-835-11 | METAL CHIP 15K 5% 1/10W | | |
| 705 | | A3U | RESISTOR | | R8625 | 1-216-864-11 | SHORT CHIP 0 | | |
| 706 | | A3U | RESISTOR | | R8650 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 707 | | A3U | RESISTOR | | R8651 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 708 | | A3U | RESISTOR | | R8656 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 709 | | A3U | RESISTOR | | R8657 | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W | | |
| 710 | | A3U | RESISTOR | | R8658 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 711 | | A3U | RESISTOR | | R8659 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | | |
| 712 | | A3U | RESISTOR | | R8660 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 713 | | A3U | RESISTOR | | R8661 | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W | | |
| 714 | | A3U | RESISTOR | | R8662 | 1-218-877-11 | METAL CHIP 18K 0.5% 1/10W | | |
| 715 | | A3U | RESISTOR | | R8663 | 1-218-891-11 | METAL CHIP 68K 0.5% 1/10W | | |
| 716 | | A3U | RESISTOR | | R8664 | 1-216-864-11 | SHORT CHIP 0 | | |
| 717 | | A3U | RESISTOR | | R8830 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 718 | | A3U | RESISTOR | | R9002 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | | |
| 719 | | A3U | RESISTOR | | R9003 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | | |
| 720 | | A3U | RESISTOR | | R9004 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 721 | | A3U | RESISTOR | | R9005 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 722 | | A3U | RESISTOR | | R9006 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 723 | | A3U | RESISTOR | | R9007 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 724 | | A3U | RESISTOR | | R9009 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 725 | | A3U | RESISTOR | | R9010 | 1-218-285-11 | METAL CHIP 75 5% 1/10W | | |
| 726 | | A3U | RESISTOR | | R9011 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 727 | | A3U | RESISTOR | | R9012 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 728 | | A3U | RESISTOR | | R9013 | 1-218-285-11 | METAL CHIP 75 5% 1/10W | | |
| 729 | | A3U | RESISTOR | | R9014 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 730 | | A3U | RESISTOR | | R9015 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 731 | | A3U | RESISTOR | | R9016 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 732 | | A3U | RESISTOR | | R9017 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 733 | | A3U | RESISTOR | | R9018 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 734 | | A3U | RESISTOR | | R9019 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 735 | | A3U | RESISTOR | | R9021 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 736 | | A3U | RESISTOR | | R9023 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 737 | | A3U | RESISTOR | | R9024 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 738 | | A3U | RESISTOR | | R9026 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 739 | | A3U | RESISTOR | | R9030 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 740 | | A3U | RESISTOR | | R9047 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|--------------|----------|--------------|--------------------------------|----------------|-----------|
| 741 | | A3U | RESISTOR | | R9048 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 742 | | A3U | RESISTOR | | R9049 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 743 | | A3U | RESISTOR | | R9050 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 744 | | A3U | RESISTOR | | R9051 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 745 | | A3U | RESISTOR | | R9052 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 746 | | A3U | RESISTOR | | R9053 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 747 | | A3U | RESISTOR | | R9054 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 748 | | A3U | RESISTOR | | R9055 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 749 | | A3U | RESISTOR | | R9056 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 750 | | A3U | RESISTOR | | R9120 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 751 | | A3U | RESISTOR | | R9121 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 752 | | A3U | RESISTOR | | R9122 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 753 | | A3U | RESISTOR | | R9123 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 754 | | A3U | RESISTOR | | R9124 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 755 | | A3U | RESISTOR | | R9125 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 756 | | A3U | RESISTOR | | R9126 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 757 | | A3U | RESISTOR | | R9127 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 758 | | A3U | RESISTOR | | R9132 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 759 | | A3U | RESISTOR | | R9133 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 760 | | A3U | RESISTOR | | R9134 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 761 | | A3U | RESISTOR | | R9135 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 762 | | A3U | RESISTOR | | R9308 | 1-218-285-11 | METAL CHIP 75 5% 1/10W | | |
| 763 | | A3U | RESISTOR | | R9309 | 1-218-285-11 | METAL CHIP 75 5% 1/10W | | |
| 764 | | A3U | RESISTOR | | R9310 | 1-218-285-11 | METAL CHIP 75 5% 1/10W | | |
| 765 | | A3U | RESISTOR | | R9327 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 766 | | A3U | RESISTOR | | R9329 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 767 | | A3U | RESISTOR | | R9401 | 1-216-864-11 | SHORT CHIP 0 | | |
| 768 | | A3U | RESISTOR | | R9402 | 1-216-864-11 | SHORT CHIP 0 | | |
| 769 | | A3U | RESISTOR | | R9404 | 1-216-864-11 | SHORT CHIP 0 | | |
| 770 | | A3U | RESISTOR | | R9406 | 1-216-864-11 | SHORT CHIP 0 | | |
| 771 | | A3U | RESISTOR | | R9407 | 1-216-864-11 | SHORT CHIP 0 | | |
| 772 | | A3U | RESISTOR | | R9408 | 1-216-864-11 | SHORT CHIP 0 | | |
| 773 | | A3U | RESISTOR | | R9409 | 1-216-864-11 | SHORT CHIP 0 | | |
| 774 | | A3U | RESISTOR | | R9411 | 1-216-864-11 | SHORT CHIP 0 | | |
| 775 | | A3U | RESISTOR | | R9474 | 1-218-889-11 | METAL CHIP 56K 0.5% 1/10W | | |
| 776 | | A3U | VARISTOR | | VD7601 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 777 | | A3U | VARISTOR | | VD7750 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 778 | | A3U | VARISTOR | | VD7751 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 779 | | A3U | VARISTOR | | VD7752 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 780 | | A3U | VARISTOR | | VD7753 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 781 | | A3U | VARISTOR | | VD9001 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 782 | | A3U | VARISTOR | | VD9002 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 783 | | A3U | VARISTOR | | VD9003 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 784 | | A3U | VARISTOR | | VD9004 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 785 | | A3U | VARISTOR | | VD9005 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 786 | | A3U | VARISTOR | | VD9006 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 787 | | A3U | VARISTOR | | VD9007 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 788 | | A3U | VARISTOR | | VD9008 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 789 | | A3U | VARISTOR | | VD9009 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 790 | | A3U | VARISTOR | | VD9010 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 791 | | A3U | VARISTOR | | VD9011 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 792 | | A3U | VARISTOR | | VD9013 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 793 | | A3U | VARISTOR | | VD9015 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 794 | | A3U | VARISTOR | | VD9017 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 795 | | A3U | VARISTOR | | VD9050 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 796 | | A3U | VARISTOR | | VD9051 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 797 | | A3U | VARISTOR | | VD9052 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 798 | | A3U | VARISTOR | | VD9053 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 799 | | A3U | VARISTOR | | VD9056 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 800 | | A3U | VARISTOR | | VD9057 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 801 | | A3U | CRYSTAL | | X2501 | 1-781-922-21 | VIBRATOR, CERAMIC | | |
| 802 | | G2 | CAPACITOR | | C6000 | 1-161-964-91 | CERAMIC 0.0047UF 250V | KLV-S26/S32A10 | |
| 803 | | G2 | CAPACITOR | | C6001 | 1-119-891-51 | CERAMIC 220PF 10.00% 250V | KLV-S26/S32A10 | |
| 804 | | G2 | CAPACITOR | | C6002 | 1-165-529-31 | MYLAR 0.22UF 10 0V | KLV-S26/S32A10 | |
| 805 | | G2 | CAPACITOR | | C6003 | 1-161-964-91 | CERAMIC 0.0047UF 250V | KLV-S26/S32A10 | |
| 806 | | G2 | CAPACITOR | | C6004 | 1-165-529-31 | MYLAR 0.22UF 10 0V | KLV-S26/S32A10 | |
| 807 | | G2 | CAPACITOR | | C6005 | 1-119-891-51 | CERAMIC 220PF 10.00% 250V | KLV-S26/S32A10 | |
| 808 | | G2 | CAPACITOR | | C6008 | 1-112-312-11 | ELECT(BLOCK) 270UF 20% 450V | KLV-S26/S32A10 | |
| 809 | | G2 | CAPACITOR | | C6010 | 1-128-954-11 | ELECT 1000UF 20% 25V | KLV-S26/S32A10 | |
| 810 | | G2 | CAPACITOR | | C6012 | 1-113-889-11 | CERAMIC 0.001UF 20.00% 250V | KLV-S26/S32A10 | |
| 811 | | G2 | CAPACITOR | | C6013 | 1-119-891-51 | CERAMIC 220PF 10.00% 250V | KLV-S26/S32A10 | |
| 812 | | G2 | CAPACITOR | | C6014 | 1-119-891-51 | CERAMIC 220PF 10.00% 250V | KLV-S26/S32A10 | |
| 813 | | G2 | CAPACITOR | | C6100 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S26/S32A10 | |
| 814 | | G2 | CAPACITOR | | C6101 | 1-107-905-11 | ELECT 4.7UF 20% 50V | KLV-S26/S32A10 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|-----|----------|--------------|---------------------------------|----------------|-----------|
| 815 | | G2 | CAPACITOR | | C6102 | 1-107-910-11 | ELECT 100UF 20% 50V | KLV-S26/S32A10 | |
| 816 | | G2 | CAPACITOR | | C6103 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S26/S32A10 | |
| 817 | | G2 | CAPACITOR | | C6104 | 1-100-831-91 | CERAMIC CHIP 0.001UF 2% 50V | KLV-S26/S32A10 | |
| 818 | | G2 | CAPACITOR | | C6105 | 1-107-906-11 | ELECT 10UF 20% 50V | KLV-S26/S32A10 | |
| 819 | | G2 | CAPACITOR | | C6108 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | KLV-S26/S32A10 | |
| 820 | | G2 | CAPACITOR | | C6109 | 1-107-888-11 | ELECT 47UF 20% 25V | KLV-S26/S32A10 | |
| 821 | | G2 | CAPACITOR | | C6111 | 1-100-613-81 | CERAMIC 470PF 5% 1KV | KLV-S26/S32A10 | |
| 822 | | G2 | CAPACITOR | | C6112 | 1-100-311-91 | FILM 22000PF 3% 800V | KLV-S26/S32A10 | |
| 823 | | G2 | CAPACITOR | | C6116 | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V | KLV-S26/S32A10 | |
| 824 | | G2 | CAPACITOR | | C6200 | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V | KLV-S26/S32A10 | |
| 825 | | G2 | CAPACITOR | | C6202 | 1-131-976-11 | ELECT 820UF 20% 25V | KLV-S26/S32A10 | |
| 826 | | G2 | CAPACITOR | | C6203 | 1-107-907-11 | ELECT 22UF 20% 50V | KLV-S26/S32A10 | |
| 827 | | G2 | CAPACITOR | | C6204 | 1-128-954-11 | ELECT 1000UF 20% 25V | KLV-S26/S32A10 | |
| 828 | | G2 | CAPACITOR | | C6205 | 1-128-954-11 | ELECT 1000UF 20% 25V | KLV-S26/S32A10 | |
| 829 | | G2 | CAPACITOR | | C6206 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S26/S32A10 | |
| 830 | | G2 | CAPACITOR | | C6213 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S26/S32A10 | |
| 831 | | G2 | CAPACITOR | | C6216 | 1-107-928-11 | ELECT 4.7UF 20% 100V | KLV-S26/S32A10 | |
| 832 | | G2 | CAPACITOR | | C6217 | 1-135-362-31 | ELECT 1500UF 20% 16V | KLV-S26/S32A10 | |
| 833 | | G2 | CAPACITOR | | C6300 | 1-161-964-91 | CERAMIC 0.0047UF 250V | KLV-S26/S32A10 | |
| 834 | | G2 | CAPACITOR | | C6301 | 1-161-964-91 | CERAMIC 0.0047UF 250V | KLV-S26/S32A10 | |
| 835 | | G2 | CAPACITOR | | C6304 | 1-100-780-31 | ELECT 22UF 20% 450V | KLV-S26/S32A10 | |
| 836 | | G2 | CAPACITOR | | C6305 | 1-107-974-11 | CERAMIC 47PF 5.00% 2KV | KLV-S26/S32A10 | |
| 837 | | G2 | CAPACITOR | | C6306 | 1-107-903-11 | ELECT 2.2UF 20% 50V | KLV-S26/S32A10 | |
| 838 | | G2 | CAPACITOR | | C6307 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S26/S32A10 | |
| 839 | | G2 | CAPACITOR | | C6308 | 1-165-127-11 | CERAMIC 470PF 10.00% 500V | KLV-S26/S32A10 | |
| 840 | | G2 | CAPACITOR | | C6309 | 1-107-905-11 | ELECT 4.7UF 20% 50V | KLV-S26/S32A10 | |
| 841 | | G2 | CAPACITOR | | C6310 | 1-107-910-11 | ELECT 100UF 20% 50V | KLV-S26/S32A10 | |
| 842 | | G2 | CAPACITOR | | C6314 | 1-165-729-31 | ELECT 470UF 20% 16V | KLV-S26/S32A10 | |
| 843 | | G2 | CAPACITOR | | C6315 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | KLV-S26/S32A10 | |
| 844 | | G2 | CAPACITOR | | C6400 | 1-107-902-11 | ELECT 1UF 20% 50V | KLV-S26/S32A10 | |
| 845 | | G2 | CAPACITOR | | C6401 | 1-107-882-91 | ELECT 100UF 20% 16V | KLV-S26/S32A10 | |
| 846 | | G2 | CAPACITOR | | C6403 | 1-107-902-11 | ELECT 1UF 20% 50V | KLV-S26/S32A10 | |
| 847 | | G2 | CAPACITOR | | C6404 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | KLV-S26/S32A10 | |
| 848 | | G2 | CAPACITOR | | C6405 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | KLV-S26/S32A10 | |
| 849 | | G2 | CAPACITOR | | C6412 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S26/S32A10 | |
| 850 | | G2 | CAPACITOR | | C6502 | 1-164-645-11 | CERAMIC 1000PF 10.00% 500V | KLV-S26/S32A10 | |
| 851 | | G2 | CAPACITOR | | C6503 | 1-164-645-11 | CERAMIC 1000PF 10.00% 500V | KLV-S26/S32A10 | |
| 852 | | G2 | CAPACITOR | | C6504 | 1-164-645-11 | CERAMIC 1000PF 10.00% 500V | KLV-S26/S32A10 | |
| 853 | | G2 | CAPACITOR | | C6505 | 1-164-645-11 | CERAMIC 1000PF 10.00% 500V | KLV-S26/S32A10 | |
| 854 | | G2 | CAPACITOR | | C6517 | 1-117-227-11 | MYLAR 1UF 10.00% 450V | KLV-S26/S32A10 | |
| 855 | | G2 | CAPACITOR | | C6518 | 1-117-227-11 | MYLAR 1UF 10.00% 450V | KLV-S26/S32A10 | |
| 856 | | G2 | CAPACITOR | | C6519 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S26/S32A10 | |
| 857 | | G2 | CAPACITOR | | C6520 | 1-117-227-11 | MYLAR 1UF 10.00% 450V | KLV-S26/S32A10 | |
| 858 | | G2 | CAPACITOR | | C6521 | 1-107-823-11 | CERAMIC CHIP 0.47UF 10.00% 16V | KLV-S26/S32A10 | |
| 859 | | G2 | CAPACITOR | | C6522 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S26/S32A10 | |
| 860 | | G2 | CAPACITOR | | C6523 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S26/S32A10 | |
| 861 | | G2 | CAPACITOR | | C6524 | 1-162-923-11 | CERAMIC CHIP 47PF 5.00% 50V | KLV-S26/S32A10 | |
| 862 | | G2 | CAPACITOR | | C6525 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | KLV-S26/S32A10 | |
| 863 | | G2 | CAPACITOR | | C6526 | 1-107-906-11 | ELECT 10UF 20% 50V | KLV-S26/S32A10 | |
| 864 | | G2 | CAPACITOR | | C6527 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S26/S32A10 | |
| 865 | | G2 | CAPACITOR | | C6528 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S26/S32A10 | |
| 866 | | G2 | CONNECTOR | * | CN6001 | 1-793-660-11 | PIN, CONNECTOR (PC BOARD) 3P | KLV-S26/S32A10 | |
| 867 | | G2 | CONNECTOR | * | CN6200 | 1-564-595-11 | PLUG, CONNECTOR 14P | KLV-S26/S32A10 | |
| 868 | | G2 | CONNECTOR | * | CN6202 | 1-564-512-11 | PLUG, CONNECTOR 9P | KLV-S26/S32A10 | |
| 869 | | G2 | CONNECTOR | * | CN6203 | 1-564-508-11 | PLUG, CONNECTOR 5P | KLV-S26/S32A10 | |
| 870 | | G2 | DIODE | | D6000 | 8-719-510-53 | DIODE D4SB60L | KLV-S26/S32A10 | |
| 871 | | G2 | DIODE | | D6001 | 8-719-948-45 | DIODE ERA22-08 | KLV-S26/S32A10 | |
| 872 | | G2 | DIODE | | D6002 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S26/S32A10 | |
| 873 | | G2 | DIODE | | D6102 | 6-500-137-01 | DIODE BAT54HT1 | KLV-S26/S32A10 | |
| 874 | | G2 | DIODE | | D6103 | 8-719-979-64 | DIODE UF4005/23 | KLV-S26/S32A10 | |
| 875 | | G2 | DIODE | | D6104 | 6-501-043-01 | DIODE UMZ16NT106 | KLV-S26/S32A10 | |
| 876 | | G2 | DIODE | | D6105 | 6-501-043-01 | DIODE UMZ16NT106 | KLV-S26/S32A10 | |
| 877 | | G2 | DIODE | | D6106 | 8-719-081-67 | DIODE M1FM3 | KLV-S26/S32A10 | |
| 878 | | G2 | DIODE | | D6107 | 8-719-081-67 | DIODE M1FM3 | KLV-S26/S32A10 | |
| 879 | | G2 | DIODE | | D6108 | 8-719-041-97 | DIODE MA113-(TX) | KLV-S26/S32A10 | |
| 880 | | G2 | DIODE | | D6200 | 8-719-510-09 | DIODE D10SC6M | KLV-S26/S32A10 | |
| 881 | | G2 | DIODE | | D6201 | 8-719-510-09 | DIODE D10SC6M | KLV-S26/S32A10 | |
| 882 | | G2 | DIODE | △ | D6202 | 8-719-510-09 | DIODE D10SC6M | KLV-S26/S32A10 | |
| 883 | | G2 | DIODE | | D6203 | 8-719-510-09 | DIODE D10SC6M | KLV-S26/S32A10 | |
| 884 | | G2 | DIODE | | D6204 | 6-500-567-31 | DIODE 10ERB20-TB3 | KLV-S26/S32A10 | |
| 885 | | G2 | DIODE | | D6205 | 6-500-567-31 | DIODE 10ERB20-TB3 | KLV-S26/S32A10 | |
| 886 | | G2 | DIODE | | D6300 | 8-719-077-76 | DIODE D2SB60A-F04 | KLV-S26/S32A10 | |
| 887 | | G2 | DIODE | | D6301 | 8-719-036-94 | DIODE RD5.6SB-T1 | KLV-S26/S32A10 | |
| 888 | | G2 | DIODE | | D6302 | 6-500-849-01 | DIODE ERA22-08KFLB | KLV-S26/S32A10 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|---------------|-----|----------|--------------|-------------------------------|----------------|-----------|
| 889 | | G2 | DIODE | | D6303 | 8-719-052-90 | DIODE D1NL40-TA2 | KLV-S26/S32A10 | |
| 890 | | G2 | DIODE | | D6304 | 8-719-052-90 | DIODE D1NL40-TA2 | KLV-S26/S32A10 | |
| 891 | | G2 | DIODE | | D6305 | 8-719-032-12 | DIODE D1NS6 | KLV-S26/S32A10 | |
| 892 | | G2 | DIODE | | D6307 | 6-500-567-31 | DIODE 10ERB20-TB3 | KLV-S26/S32A10 | |
| 893 | | G2 | DIODE | | D6400 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S26/S32A10 | |
| 894 | | G2 | DIODE | | D6402 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S26/S32A10 | |
| 895 | | G2 | DIODE | | D6408 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S26/S32A10 | |
| 896 | | G2 | DIODE | | D6501 | 6-501-043-01 | DIODE UMZ16NT106 | KLV-S26/S32A10 | |
| 897 | | G2 | DIODE | | D6502 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S26/S32A10 | |
| 898 | | G2 | DIODE | | D6505 | 8-719-054-59 | DIODE FSF05A60 | KLV-S26/S32A10 | |
| 899 | | G2 | DIODE | | D6506 | 8-719-054-59 | DIODE FSF05A60 | KLV-S26/S32A10 | |
| 900 | | G2 | DIODE | | D6509 | 6-500-108-01 | DIODE EP05FA20 | KLV-S26/S32A10 | |
| 901 | | G2 | DIODE | | D6510 | 6-500-137-01 | DIODE BAT54HT1 | KLV-S26/S32A10 | |
| 902 | | G2 | DIODE | | D6511 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S26/S32A10 | |
| 903 | | G2 | DIODE | | D6512 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S26/S32A10 | |
| 904 | | G2 | DIODE | | D6513 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S26/S32A10 | |
| 905 | | G2 | FUSE | △ | F6000 | 1-576-867-11 | FUSE 4A 250V | KLV-S26/S32A10 | |
| 906 | | G2 | FERRITE BEAD | | FB6100 | 1-410-397-21 | FERRITE 1.1UH | KLV-S26/S32A10 | |
| 907 | | G2 | FERRITE BEAD | | FB6101 | 1-410-397-21 | FERRITE 1.1UH | KLV-S26/S32A10 | |
| 908 | | G2 | FUSE HOLDER | | FH6000 | 1-533-223-11 | FUSE HOLDER 0A 0V | KLV-S26/S32A10 | |
| 909 | | G2 | FUSE HOLDER | | FH6001 | 1-533-223-11 | FUSE HOLDER 0A 0V | KLV-S26/S32A10 | |
| 910 | | G2 | IC | | IC6100 | 6-706-852-01 | IC CXD9841M | KLV-S26/S32A10 | |
| 911 | | G2 | IC | | IC6200 | 8-759-682-42 | IC MM1431ATT | KLV-S26/S32A10 | |
| 912 | | G2 | IC | △ | IC6300 | 6-600-279-01 | IC STR-A6169 | KLV-S26/S32A10 | |
| 913 | | G2 | IC | | IC6301 | 8-759-682-42 | IC MM1431ATT | KLV-S26/S32A10 | |
| 914 | | G2 | IC | | IC6402 | 8-759-682-42 | IC MM1431ATT | KLV-S26/S32A10 | |
| 915 | | G2 | IC | △ | IC6502 | 6-704-815-01 | IC FA5501N-TE1 | KLV-S26/S32A10 | |
| 916 | | G2 | IC | | IC6503 | 8-759-682-42 | IC MM1431ATT | KLV-S26/S32A10 | |
| 917 | | G2 | COIL | | L6000 | 1-456-678-11 | LINE FILTER COIL | KLV-S26/S32A10 | |
| 918 | | G2 | COIL | | L6001 | 1-456-678-11 | LINE FILTER COIL | KLV-S26/S32A10 | |
| 919 | | G2 | COIL | | L6201 | 1-406-971-21 | INDUCTOR 10UH | KLV-S26/S32A10 | |
| 920 | | G2 | COIL | | L6202 | 1-406-971-21 | INDUCTOR 10UH | KLV-S26/S32A10 | |
| 921 | | G2 | COIL | | L6300 | 1-414-934-21 | INDUCTOR 10UH | KLV-S26/S32A10 | |
| 922 | | G2 | COIL | | L6500 | 1-457-039-12 | INDUCTOR 110UH | KLV-S26/S32A10 | |
| 923 | | G2 | COIL | | L6502 | 1-456-982-11 | INDUCTOR 295UH | KLV-S26/S32A10 | |
| 924 | | G2 | PHOTO COUPLER | | PH6000 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | KLV-S26/S32A10 | |
| 925 | | G2 | PHOTO COUPLER | | PH6100 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | KLV-S26/S32A10 | |
| 926 | | G2 | PHOTO COUPLER | | PH6300 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | KLV-S26/S32A10 | |
| 927 | | G2 | PHOTO COUPLER | | PH6400 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | KLV-S26/S32A10 | |
| 928 | | G2 | PHOTO COUPLER | | PH6402 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | KLV-S26/S32A10 | |
| 929 | | G2 | PHOTO COUPLER | | PH6501 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | KLV-S26/S32A10 | |
| 930 | | G2 | TRANSISTOR | △ | Q6100 | 6-551-297-01 | TRANSISTOR 2SK3568(LBS1SONY.Q | KLV-S26/S32A10 | |
| 931 | | G2 | TRANSISTOR | △ | Q6101 | 6-551-297-01 | TRANSISTOR 2SK3568(LBS1SONY.Q | KLV-S26/S32A10 | |
| 932 | | G2 | TRANSISTOR | | Q6400 | 8-729-804-41 | TRANSISTOR 2SB1122-S | KLV-S26/S32A10 | |
| 933 | | G2 | TRANSISTOR | | Q6401 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | KLV-S26/S32A10 | |
| 934 | | G2 | TRANSISTOR | | Q6402 | 8-729-023-22 | TRANSISTOR 2SD2114K | KLV-S26/S32A10 | |
| 935 | | G2 | TRANSISTOR | | Q6403 | 8-729-026-49 | TRANSISTOR 2SA1037AK-T146-R | KLV-S26/S32A10 | |
| 936 | | G2 | TRANSISTOR | | Q6404 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | KLV-S26/S32A10 | |
| 937 | | G2 | TRANSISTOR | △ | Q6500 | 6-551-336-01 | TRANSISTOR 2SK3934(LBS1SONY.Q | KLV-S26/S32A10 | |
| 938 | | G2 | TRANSISTOR | | Q6501 | 8-729-820-90 | TRANSISTOR 2SD1621-ST | KLV-S26/S32A10 | |
| 939 | | G2 | TRANSISTOR | △ | Q6502 | 8-729-804-41 | TRANSISTOR 2SB1122-S | KLV-S26/S32A10 | |
| 940 | | G2 | TRANSISTOR | | Q6503 | 8-729-026-49 | TRANSISTOR 2SA1037AK-T146-R | KLV-S26/S32A10 | |
| 941 | | G2 | TRANSISTOR | | Q6504 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | KLV-S26/S32A10 | |
| 942 | | G2 | RESISTOR | | R6001 | 1-240-938-91 | METAL 1.5M 5% 0.5W | KLV-S26/S32A10 | |
| 943 | | G2 | RESISTOR | △ | R6002 | 1-240-251-11 | CEMENTED 6.8 5% 10W | KLV-S26/S32A10 | |
| 944 | | G2 | RESISTOR | | R6003 | 1-247-752-11 | CARBON 1K 5% 1/2W | KLV-S26/S32A10 | |
| 945 | | G2 | RESISTOR | | R6004 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S26/S32A10 | |
| 946 | | G2 | RESISTOR | | R6014 | 1-215-859-00 | METAL OXIDE 22 5% 1W | KLV-S26/S32A10 | |
| 947 | | G2 | RESISTOR | | R6016 | 1-243-681-71 | METAL OXIDE 33 5% 1W | KLV-S26/S32A10 | |
| 948 | | G2 | RESISTOR | | R6101 | 1-249-385-11 | CARBON 2.2 5% 1/4W | KLV-S26/S32A10 | |
| 949 | | G2 | RESISTOR | △ | R6102 | 1-202-933-61 | FUSIBLE 0.1 10% 1/2W | KLV-S26/S32A10 | |
| 950 | | G2 | RESISTOR | | R6103 | 1-218-823-11 | METAL CHIP 100 0.5% 1/10W | KLV-S26/S32A10 | |
| 951 | | G2 | RESISTOR | | R6104 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | KLV-S26/S32A10 | |
| 952 | | G2 | RESISTOR | | R6105 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S26/S32A10 | |
| 953 | | G2 | RESISTOR | | R6106 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S26/S32A10 | |
| 954 | | G2 | RESISTOR | | R6107 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S26/S32A10 | |
| 955 | | G2 | RESISTOR | | R6108 | 1-208-836-11 | METAL CHIP 180K 0.5% 1/10W | KLV-S26/S32A10 | |
| 956 | | G2 | RESISTOR | | R6109 | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W | KLV-S26/S32A10 | |
| 957 | | G2 | RESISTOR | | R6110 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | KLV-S26/S32A10 | |
| 958 | | G2 | RESISTOR | | R6111 | 1-218-873-11 | METAL CHIP 12K 0.5% 1/10W | KLV-S26/S32A10 | |
| 959 | | G2 | RESISTOR | | R6114 | 1-211-969-11 | METAL CHIP 10 0.5% 1/10W | KLV-S26/S32A10 | |
| 960 | | G2 | RESISTOR | △ | R6116 | 1-216-009-91 | RES-CHIP 22 5% 1/10W | KLV-S26/S32A10 | |
| 961 | | G2 | RESISTOR | | R6117 | 1-216-009-91 | RES-CHIP 22 5% 1/10W | KLV-S26/S32A10 | |
| 962 | | G2 | RESISTOR | | R6118 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S26/S32A10 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|----------|-----|----------|--------------|----------------------------|----------------|-----------|
| 963 | | G2 | RESISTOR | | R6119 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S26/S32A10 | |
| 964 | | G2 | RESISTOR | | R6122 | 1-245-315-71 | METAL OXIDE 0.1 5% 2W | KLV-S26/S32A10 | |
| 965 | | G2 | RESISTOR | | R6123 | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W | KLV-S26/S32A10 | |
| 966 | | G2 | RESISTOR | | R6127 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S26/S32A10 | |
| 967 | | G2 | RESISTOR | | R6200 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S26/S32A10 | |
| 968 | | G2 | RESISTOR | | R6201 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S26/S32A10 | |
| 969 | | G2 | RESISTOR | | R6203 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S26/S32A10 | |
| 970 | | G2 | RESISTOR | | R6204 | 1-218-843-11 | METAL CHIP 680 0.5% 1/10W | KLV-S26/S32A10 | |
| 971 | | G2 | RESISTOR | | R6205 | 1-218-865-11 | METAL CHIP 5.6K 0.5% 1/10W | KLV-S26/S32A10 | |
| 972 | | G2 | RESISTOR | | R6207 | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W | KLV-S26/S32A10 | |
| 973 | | G2 | RESISTOR | △ | R6208 | 1-249-377-11 | CARBON 0.47 5% 1/4W | KLV-S26/S32A10 | |
| 974 | | G2 | RESISTOR | | R6226 | 1-249-389-11 | CARBON 4.7 5% 1/4W | KLV-S26/S32A10 | |
| 975 | | G2 | RESISTOR | △ | R6300 | 1-249-381-11 | CARBON 1 5% 1/4W | KLV-S26/S32A10 | |
| 976 | | G2 | RESISTOR | | R6301 | 1-216-353-00 | METAL OXIDE 2.2 5% 1W | KLV-S26/S32A10 | |
| 977 | | G2 | RESISTOR | | R6305 | 1-260-129-11 | CARBON 330K 5% 1/2W | KLV-S26/S32A10 | |
| 978 | | G2 | RESISTOR | | R6306 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | KLV-S26/S32A10 | |
| 979 | | G2 | RESISTOR | | R6307 | 1-249-385-11 | CARBON 2.2 5% 1/4W | KLV-S26/S32A10 | |
| 980 | | G2 | RESISTOR | | R6308 | 1-249-393-11 | CARBON 10 5% 1/4W | KLV-S26/S32A10 | |
| 981 | | G2 | RESISTOR | | R6310 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | KLV-S26/S32A10 | |
| 982 | | G2 | RESISTOR | | R6311 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | KLV-S26/S32A10 | |
| 983 | | G2 | RESISTOR | | R6313 | 1-216-839-11 | METAL CHIP 33K 5% 1/10W | KLV-S26/S32A10 | |
| 984 | | G2 | RESISTOR | | R6314 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | KLV-S26/S32A10 | |
| 985 | | G2 | RESISTOR | | R6315 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | KLV-S26/S32A10 | |
| 986 | | G2 | RESISTOR | | R6400 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S26/S32A10 | |
| 987 | | G2 | RESISTOR | | R6401 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | KLV-S26/S32A10 | |
| 988 | | G2 | RESISTOR | | R6402 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S26/S32A10 | |
| 989 | | G2 | RESISTOR | | R6403 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | KLV-S26/S32A10 | |
| 990 | | G2 | RESISTOR | | R6404 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S26/S32A10 | |
| 991 | | G2 | RESISTOR | | R6405 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S26/S32A10 | |
| 992 | | G2 | RESISTOR | | R6407 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S26/S32A10 | |
| 993 | | G2 | RESISTOR | | R6408 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | KLV-S26/S32A10 | |
| 994 | | G2 | RESISTOR | | R6409 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S26/S32A10 | |
| 995 | | G2 | RESISTOR | | R6410 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | KLV-S26/S32A10 | |
| 996 | | G2 | RESISTOR | | R6412 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S26/S32A10 | |
| 997 | | G2 | RESISTOR | | R6413 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | KLV-S26/S32A10 | |
| 998 | | G2 | RESISTOR | | R6436 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S26/S32A10 | |
| 999 | | G2 | RESISTOR | | R6437 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S26/S32A10 | |
| 1000 | | G2 | RESISTOR | | R6441 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | KLV-S26/S32A10 | |
| 1001 | | G2 | RESISTOR | | R6442 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S26/S32A10 | |
| 1002 | | G2 | RESISTOR | | R6452 | 1-218-851-11 | METAL CHIP 1.5K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1003 | | G2 | RESISTOR | | R6453 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1004 | | G2 | RESISTOR | | R6454 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S26/S32A10 | |
| 1005 | | G2 | RESISTOR | | R6455 | 1-218-899-11 | METAL CHIP 150K 0.5% 1/16W | KLV-S26/S32A10 | |
| 1006 | | G2 | RESISTOR | | R6456 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1007 | | G2 | RESISTOR | | R6457 | 1-218-903-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1008 | | G2 | RESISTOR | | R6458 | 1-216-839-11 | METAL CHIP 33K 5% 1/10W | KLV-S26/S32A10 | |
| 1009 | | G2 | RESISTOR | | R6459 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | KLV-S26/S32A10 | |
| 1010 | | G2 | RESISTOR | | R6502 | 1-215-882-00 | METAL OXIDE 22 5% 2W | KLV-S26/S32A10 | |
| 1011 | | G2 | RESISTOR | | R6503 | 1-215-882-00 | METAL OXIDE 22 5% 2W | KLV-S26/S32A10 | |
| 1012 | | G2 | RESISTOR | | R6505 | 1-216-864-11 | SHORT CHIP 0 | KLV-S26/S32A10 | |
| 1013 | | G2 | RESISTOR | | R6507 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S26/S32A10 | |
| 1014 | | G2 | RESISTOR | | R6508 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S26/S32A10 | |
| 1015 | | G2 | RESISTOR | | R6509 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S26/S32A10 | |
| 1016 | | G2 | RESISTOR | | R6512 | 1-218-907-11 | METAL CHIP 330K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1017 | | G2 | RESISTOR | | R6513 | 1-218-879-11 | METAL CHIP 22K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1018 | | G2 | RESISTOR | | R6514 | 1-218-895-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1019 | | G2 | RESISTOR | | R6516 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1020 | | G2 | RESISTOR | | R6517 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1021 | | G2 | RESISTOR | | R6518 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1022 | | G2 | RESISTOR | | R6519 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1023 | | G2 | RESISTOR | | R6526 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1024 | | G2 | RESISTOR | | R6527 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1025 | | G2 | RESISTOR | | R6528 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1026 | | G2 | RESISTOR | | R6531 | 1-217-611-00 | METAL 0.1 10% 2W | KLV-S26/S32A10 | |
| 1027 | | G2 | RESISTOR | | R6532 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | KLV-S26/S32A10 | |
| 1028 | | G2 | RESISTOR | | R6533 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S26/S32A10 | |
| 1029 | | G2 | RESISTOR | | R6534 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | KLV-S26/S32A10 | |
| 1030 | | G2 | RESISTOR | △ | R6537 | 1-249-389-11 | CARBON 4.7 5% 1/4W | KLV-S26/S32A10 | |
| 1031 | | G2 | RESISTOR | | R6538 | 1-249-405-11 | CARBON 100 5% 1/4W | KLV-S26/S32A10 | |
| 1032 | | G2 | RESISTOR | | R6539 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | KLV-S26/S32A10 | |
| 1033 | | G2 | RESISTOR | | R6542 | 1-216-835-11 | METAL CHIP 15K 5% 1/10W | KLV-S26/S32A10 | |
| 1034 | | G2 | RESISTOR | | R6545 | 1-208-840-11 | METAL CHIP 270K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1035 | | G2 | RESISTOR | | R6546 | 1-208-840-11 | METAL CHIP 270K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1036 | | G2 | RESISTOR | | R6547 | 1-208-840-11 | METAL CHIP 270K 0.5% 1/10W | KLV-S26/S32A10 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-------------|-----|----------|--------------|----------------------------------|----------------|-----------|
| 1037 | | G2 | RESISTOR | | R6548 | 1-208-840-11 | METAL CHIP 270K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1038 | | G2 | RESISTOR | | R6549 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1039 | | G2 | RESISTOR | | R6550 | 1-218-869-11 | METAL CHIP 8.2K 0.5% 1/10W | KLV-S26/S32A10 | |
| 1040 | | G2 | RESISTOR | | R6551 | 1-249-393-11 | CARBON 10 5% 1/4W | KLV-S26/S32A10 | |
| 1041 | | G2 | RESISTOR | | R6552 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | KLV-S26/S32A10 | |
| 1042 | | G2 | RESISTOR | | R6553 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S26/S32A10 | |
| 1043 | | G2 | RESISTOR | | R6554 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S26/S32A10 | |
| 1044 | | G2 | RESISTOR | | R6555 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | KLV-S26/S32A10 | |
| 1045 | | G2 | RESISTOR | | R6556 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | KLV-S26/S32A10 | |
| 1046 | | G2 | RESISTOR | | R6557 | 1-218-823-11 | METAL CHIP 100 0.5% 1/10W | KLV-S26/S32A10 | |
| 1047 | | G2 | RELAY | | RY6003 | 1-755-418-12 | RELAY (AC POWER) | KLV-S26/S32A10 | |
| 1048 | | G2 | RELAY | | RY6004 | 1-755-418-12 | RELAY (AC POWER) | KLV-S26/S32A10 | |
| 1049 | | G2 | TRANSFORMER | | T6100 | 1-443-589-11 | CONVERTER TRANSFORMER (PIT) | KLV-S26/S32A10 | |
| 1050 | | G2 | TRANSFORMER | | T6101 | 1-443-588-11 | CONVERTER TRANSFORMER (PIT) | KLV-S26/S32A10 | |
| 1051 | | G2 | TRANSFORMER | | T6300 | 1-443-313-21 | TRANSFORMER, CONVERTER (SBT) | KLV-S26/S32A10 | |
| 1052 | | G2 | THERMISTOR | | TH6300 | 1-803-586-41 | THERMISTOR | KLV-S26/S32A10 | |
| 1053 | | G2 | VARISTOR | | VD6000 | 1-805-479-21 | VARISTOR | KLV-S26/S32A10 | |
| 1054 | | G2 | VARISTOR | | VD6001 | 1-805-479-21 | VARISTOR | KLV-S26/S32A10 | |
| 1055 | | TU | CAPACITOR | | C6400 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1056 | | TU | CAPACITOR | | C6401 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1057 | | TU | CAPACITOR | | C6402 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 1058 | | TU | CAPACITOR | | C6403 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 1059 | | TU | CAPACITOR | | C6404 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 1060 | | TU | CAPACITOR | | C6405 | 1-127-820-11 | CERAMIC CHIP 4.7UF 10% 16V | | |
| 1061 | | TU | CAPACITOR | | C6406 | 1-127-820-11 | CERAMIC CHIP 4.7UF 10% 16V | | |
| 1062 | | TU | CAPACITOR | | C6407 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1063 | | TU | CAPACITOR | | C6408 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1064 | | TU | CAPACITOR | | C6409 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1065 | | TU | CAPACITOR | | C6410 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1066 | | TU | CAPACITOR | | C6411 | 1-127-820-11 | CERAMIC CHIP 4.7UF 10% 16V | | |
| 1067 | | TU | CAPACITOR | | C6412 | 1-127-820-11 | CERAMIC CHIP 4.7UF 10% 16V | | |
| 1068 | | TU | CAPACITOR | | C6413 | 1-127-820-11 | CERAMIC CHIP 4.7UF 10% 16V | | |
| 1069 | | TU | CAPACITOR | | C6414 | 1-127-820-11 | CERAMIC CHIP 4.7UF 10% 16V | | |
| 1070 | | TU | CAPACITOR | | C6415 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1071 | | TU | CAPACITOR | | C6416 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1072 | | TU | CAPACITOR | | C6417 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 1073 | | TU | CAPACITOR | | C6418 | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V | | |
| 1074 | | TU | CAPACITOR | | C6419 | 1-126-404-11 | ELECT CHIP 4.7UF 20.00% 50V | | |
| 1075 | | TU | CAPACITOR | | C6420 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 1076 | | TU | CAPACITOR | | C6421 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 1077 | | TU | CAPACITOR | | C6422 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 1078 | | TU | CAPACITOR | | C6423 | 1-162-995-11 | CERAMIC CHIP 0.022UF 50V | | |
| 1079 | | TU | CAPACITOR | | C6424 | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V | | |
| 1080 | | TU | CAPACITOR | | C6425 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1081 | | TU | CAPACITOR | | C6426 | 1-127-820-11 | CERAMIC CHIP 4.7UF 10% 16V | | |
| 1082 | | TU | CAPACITOR | | C6427 | 1-127-820-11 | CERAMIC CHIP 4.7UF 10% 16V | | |
| 1083 | | TU | CAPACITOR | | C6428 | 1-127-820-11 | CERAMIC CHIP 4.7UF 10% 16V | | |
| 1084 | | TU | CAPACITOR | | C6429 | 1-127-820-11 | CERAMIC CHIP 4.7UF 10% 16V | | |
| 1085 | | TU | CAPACITOR | | C6430 | 1-127-820-11 | CERAMIC CHIP 4.7UF 10% 16V | | |
| 1086 | | TU | CAPACITOR | | C6431 | 1-127-820-11 | CERAMIC CHIP 4.7UF 10% 16V | | |
| 1087 | | TU | CONNECTOR | * | CN6401 | 1-764-334-11 | PLUG, CONNECTOR 11P | | |
| 1088 | | TU | CONNECTOR | * | CN6403 | 1-564-516-11 | PLUG, CONNECTOR 13P | | |
| 1089 | | TU | DIODE | | D6401 | 8-719-977-28 | DIODE DTZ10B | | |
| 1090 | | TU | DIODE | | D6402 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 1091 | | TU | IC | | IC6401 | 6-703-225-01 | IC S-80928CNMC-G8YT2G | | |
| 1092 | | TU | TRANSISTOR | | Q6401 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1093 | | TU | TRANSISTOR | | Q6402 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1094 | | TU | TRANSISTOR | | Q6403 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1095 | | TU | TRANSISTOR | | Q6404 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1096 | | TU | TRANSISTOR | | Q6406 | 6-550-586-01 | TRANSISTOR 2PA1576R-115 | | |
| 1097 | | TU | TRANSISTOR | | Q6407 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1098 | | TU | TRANSISTOR | | Q6408 | 6-550-586-01 | TRANSISTOR 2PA1576R-115 | | |
| 1099 | | TU | TRANSISTOR | | Q6457 | 6-550-549-01 | TRANSISTOR DTC114EUAFT106 | | |
| 1100 | | TU | TRANSISTOR | | Q6459 | 6-550-549-01 | TRANSISTOR DTC114EUAFT106 | | |
| 1101 | | TU | TRANSISTOR | | Q6460 | 6-550-549-01 | TRANSISTOR DTC114EUAFT106 | | |
| 1102 | | TU | TRANSISTOR | | Q6461 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1103 | | TU | TRANSISTOR | | Q6462 | 6-550-586-01 | TRANSISTOR 2PA1576R-115 | | |
| 1104 | | TU | RESISTOR | | R6400 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1105 | | TU | RESISTOR | | R6401 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1106 | | TU | RESISTOR | | R6402 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1107 | | TU | RESISTOR | | R6403 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1108 | | TU | RESISTOR | | R6404 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1109 | | TU | RESISTOR | | R6405 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1110 | | TU | RESISTOR | | R6409 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |

| No. | # | Board | Type | Δ/\ast | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-----------|---------------|----------|--------------|---------------------------------|-----------|-----------|
| 1111 | | TU | RESISTOR | | R6410 | 1-216-839-11 | METAL CHIP 33K 5% 1/10W | | |
| 1112 | | TU | RESISTOR | | R6412 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1113 | | TU | RESISTOR | | R6413 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 1114 | | TU | RESISTOR | | R6414 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1115 | | TU | RESISTOR | | R6415 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1116 | | TU | RESISTOR | | R6416 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1117 | | TU | RESISTOR | | R6417 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1118 | | TU | RESISTOR | | R6418 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1119 | | TU | RESISTOR | | R6420 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1120 | | TU | RESISTOR | | R6421 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1121 | | TU | RESISTOR | | R6423 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1122 | | TU | RESISTOR | | R6424 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1123 | | TU | RESISTOR | | R6425 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1124 | | TU | RESISTOR | | R6426 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1125 | | TU | RESISTOR | | R6427 | 1-216-836-11 | METAL CHIP 18K 5% 1/10W | | |
| 1126 | | TU | RESISTOR | | R6428 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1127 | | TU | RESISTOR | | R6430 | 1-216-826-11 | METAL CHIP 2.7K 5% 1/10W | | |
| 1128 | | TU | RESISTOR | | R6431 | 1-216-839-11 | METAL CHIP 33K 5% 1/10W | | |
| 1129 | | TU | RESISTOR | | R6432 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1130 | | TU | RESISTOR | | R6433 | 1-216-828-11 | METAL CHIP 3.9K 5% 1/10W | | |
| 1131 | | TU | RESISTOR | | R6434 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1132 | | TU | RESISTOR | | R6435 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1133 | | TU | RESISTOR | | R6437 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1134 | | TU | RESISTOR | | R6438 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1135 | | TU | RESISTOR | | R6468 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1136 | | TU | RESISTOR | | R6469 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1137 | | TU | RESISTOR | | R6470 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1138 | | TU | RESISTOR | | R6471 | 1-216-828-11 | METAL CHIP 3.9K 5% 1/10W | | |
| 1139 | | TU | RESISTOR | | R6472 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1140 | | TU | RESISTOR | | R6473 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1141 | | TU | RESISTOR | | R6474 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 1142 | | TU | RESISTOR | | R6475 | 1-216-828-11 | METAL CHIP 3.9K 5% 1/10W | | |
| 1143 | | TU | RESISTOR | | R6476 | 1-216-826-11 | METAL CHIP 2.7K 5% 1/10W | | |
| 1144 | | TU | RESISTOR | | R6477 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1145 | | TU | RESISTOR | | R6478 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 1146 | | TU | RESISTOR | | R6479 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1147 | | TU | TUNER | | TU6400 | 8-598-593-60 | TUNER, FSS BTF-WA421 | | |
| 1148 | | H1 | CAPACITOR | | C9802 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1149 | | H1 | CAPACITOR | | C9803 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1150 | | H1 | CONNECTOR | * | CN9801 | 1-793-137-21 | PIN, CONNECTOR 3P | | |
| 1151 | | H1 | DIODE | | D9801 | 8-719-036-94 | DIODE RD5.6SB-T1 | | |
| 1152 | | H1 | RESISTOR | | R9801 | 1-218-859-11 | METAL CHIP 3.3K 0.5% 1/10W | | |
| 1153 | | H1 | RESISTOR | | R9802 | 1-218-848-11 | METAL CHIP 1.1K 0.5% 1/10W | | |
| 1154 | | H1 | RESISTOR | | R9803 | 1-218-841-11 | METAL CHIP 560 0.5% 1/10W | | |
| 1155 | | H1 | RESISTOR | | R9804 | 1-218-835-11 | METAL CHIP 330 0.5% 1/10W | | |
| 1156 | | H1 | RESISTOR | | R9805 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1157 | | H1 | RESISTOR | | R9806 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 1158 | | H1 | SWITCH | | S9801 | 1-771-105-11 | SWITCH, TACTILE | | |
| 1159 | | H1 | SWITCH | | S9802 | 1-771-105-11 | SWITCH, TACTILE | | |
| 1160 | | H1 | SWITCH | | S9803 | 1-771-105-11 | SWITCH, TACTILE | | |
| 1161 | | H1 | SWITCH | | S9804 | 1-771-105-11 | SWITCH, TACTILE | | |
| 1162 | | H1 | SWITCH | | S9805 | 1-771-105-11 | SWITCH, TACTILE | | |
| 1163 | | H1 | SWITCH | | S9806 | 1-771-105-11 | SWITCH, TACTILE | | |
| 1164 | | H1 | SWITCH | | S9807 | 1-771-105-11 | SWITCH, TACTILE | | |
| 1165 | | H1 | SWITCH | | S9808 | 1-771-105-11 | SWITCH, TACTILE | | |
| 1166 | | H1 | VARISTOR | | VD9801 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 1167 | | H1 | VARISTOR | | VD9802 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 1168 | | H1 | VARISTOR | | VD9803 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 1169 | | H1 | VARISTOR | | VD9804 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 1170 | | H1 | VARISTOR | | VD9805 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 1171 | | H1 | VARISTOR | | VD9806 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 1172 | | H1 | VARISTOR | | VD9807 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 1173 | | H1 | VARISTOR | | VD9808 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 1174 | | H2 | CAPACITOR | | C9041 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 1175 | | H2 | CAPACITOR | | C9048 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 1176 | | H2 | CAPACITOR | | C9049 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 1177 | | H2 | CAPACITOR | | C9050 | 1-165-815-91 | CERAMIC CHIP 2.2UF 25V | | |
| 1178 | | H2 | CAPACITOR | | C9077 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 1179 | | H2 | CAPACITOR | | C9078 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 1180 | | H2 | CAPACITOR | | C9079 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 1181 | | H2 | CAPACITOR | | C9080 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 1182 | | H2 | CONNECTOR | | CN9851 | 1-573-290-21 | PIN, CONNECTOR (1.5MM) (SMD)4P | | |
| 1183 | | H2 | DIODE | | D9035 | 8-719-977-28 | DIODE DTZ10B | | |
| 1184 | | H2 | DIODE | | D9036 | 8-719-977-28 | DIODE DTZ10B | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|------------|-----|----------|--------------|---------------------------------|------------|-----------|
| 1185 | | H2 | DIODE | | D9037 | 8-719-977-28 | DIODE DTZ10B | | |
| 1186 | | H2 | DIODE | | D9038 | 8-719-977-28 | DIODE DTZ10B | | |
| 1187 | | H2 | DIODE | | D9058 | 8-719-977-28 | DIODE DTZ10B | | |
| 1188 | | H2 | DIODE | | D9059 | 8-719-977-28 | DIODE DTZ10B | | |
| 1189 | | H2 | JACK | | J9006 | 1-780-244-11 | TERMINAL BLOCK, S(RIGHT ANGLE) | | |
| 1190 | | H2 | JACK | | J9852 | 1-815-325-11 | JACK | | |
| 1191 | | H2 | RESISTOR | | R9103 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 1192 | | H2 | RESISTOR | | R9104 | 1-218-285-11 | METAL CHIP 75 5% 1/10W | | |
| 1193 | | H2 | RESISTOR | | R9105 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 1194 | | H2 | RESISTOR | | R9108 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 1195 | | H2 | RESISTOR | | R9109 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 1196 | | H2 | RESISTOR | | R9112 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1197 | | H2 | RESISTOR | | R9113 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1198 | | H2 | RESISTOR | | R9114 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1199 | | H2 | RESISTOR | | R9115 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1200 | | H2 | RESISTOR | | R9116 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1201 | | H2 | RESISTOR | | R9136 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 1202 | | H2 | RESISTOR | | R9137 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1203 | | H2 | RESISTOR | | R9138 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 1204 | | H2 | RESISTOR | | R9139 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1205 | | H2 | RESISTOR | | R9142 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1206 | | H2 | RESISTOR | | R9851 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1207 | | H2 | RESISTOR | | R9852 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1208 | | H2 | VARISTOR | | VD9851 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 1209 | | H2 | VARISTOR | | VD9852 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 1210 | | H2 | VARISTOR | | VD9853 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 1211 | | H3 | CAPACITOR | | C9902 | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V | | |
| 1212 | | H3 | CAPACITOR | | C9904 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 1213 | | H3 | CAPACITOR | | C9905 | 1-119-667-11 | CERAMIC CHIP 22UF 10V | | |
| 1214 | | H3 | CAPACITOR | | C9907 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1215 | | H3 | CAPACITOR | | C9908 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 1216 | | H3 | CONNECTOR | | CN9901 | 1-784-254-11 | CONNECTOR 10P | | |
| 1217 | | H3 | DIODE | | D9903 | 6-500-861-01 | DIODE SML-020MVT-T86 | | |
| 1218 | | H3 | DIODE | | D9906 | 6-500-861-01 | DIODE SML-020MVT-T86 | | |
| 1219 | | H3 | DIODE | | D9909 | 8-719-036-94 | DIODE RD5.6SB-T1 | | |
| 1220 | | H3 | DIODE | | D9912 | 8-719-064-07 | DIODE SML-310LTT86 | | |
| 1221 | | H3 | IC | | IC9901 | 6-600-271-01 | IC RPM7140-H8 | | |
| 1222 | | H3 | IC | | IC9902 | 6-600-418-01 | IC TPS851(A.SONY) | | |
| 1223 | | H3 | TRANSISTOR | | Q9902 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 1224 | | H3 | TRANSISTOR | | Q9903 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 1225 | | H3 | TRANSISTOR | | Q9904 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 1226 | | H3 | TRANSISTOR | | Q9905 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 1227 | | H3 | TRANSISTOR | | Q9906 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | | |
| 1228 | | H3 | TRANSISTOR | | Q9907 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 1229 | | H3 | RESISTOR | | R9902 | 1-216-818-11 | METAL CHIP 560 5% 1/10W | | |
| 1230 | | H3 | RESISTOR | | R9903 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1231 | | H3 | RESISTOR | | R9904 | 1-216-818-11 | METAL CHIP 560 5% 1/10W | | |
| 1232 | | H3 | RESISTOR | | R9906 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |
| 1233 | | H3 | RESISTOR | | R9907 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1234 | | H3 | RESISTOR | | R9908 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 1235 | | H3 | RESISTOR | | R9910 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1236 | | H3 | RESISTOR | | R9911 | 1-216-839-11 | METAL CHIP 33K 5% 1/10W | | |
| 1237 | | H3 | RESISTOR | | R9912 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1238 | | H3 | RESISTOR | | R9914 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | | |
| 1239 | | H3 | RESISTOR | | R9915 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | | |
| 1240 | | H3 | RESISTOR | | R9916 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 1241 | | H3 | RESISTOR | | R9917 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1242 | | H3 | RESISTOR | | R9918 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1243 | | G3 | CAPACITOR | | C6002 | 1-165-531-11 | MYLAR 1UF 10 275V | KLV-S40A10 | |
| 1244 | | G3 | CAPACITOR | | C6004 | 1-165-529-31 | MYLAR 0.22UF 10 0V | KLV-S40A10 | |
| 1245 | | G3 | CAPACITOR | | C6005 | 1-119-886-51 | CERAMIC 470PF 10.00% 250V | KLV-S40A10 | |
| 1246 | | G3 | CAPACITOR | | C6006 | 1-119-886-51 | CERAMIC 470PF 10.00% 250V | KLV-S40A10 | |
| 1247 | | G3 | CAPACITOR | | C6102 | 1-104-760-11 | CERAMIC CHIP 0.047UF 10.00% 50V | KLV-S40A10 | |
| 1248 | | G3 | CAPACITOR | | C6103 | 1-115-350-51 | CERAMIC 0.0047UF 2KV | KLV-S40A10 | |
| 1249 | | G3 | CAPACITOR | | C6104 | 1-115-350-51 | CERAMIC 0.0047UF 2KV | KLV-S40A10 | |
| 1250 | | G3 | CAPACITOR | | C6106 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | KLV-S40A10 | |
| 1251 | | G3 | CAPACITOR | | C6107 | 1-107-823-11 | CERAMIC CHIP 0.47UF 10.00% 16V | KLV-S40A10 | |
| 1252 | | G3 | CAPACITOR | | C6108 | 1-115-350-51 | CERAMIC 0.0047UF 2KV | KLV-S40A10 | |
| 1253 | | G3 | CAPACITOR | | C6109 | 1-115-350-51 | CERAMIC 0.0047UF 2KV | KLV-S40A10 | |
| 1254 | | G3 | CAPACITOR | | C6110 | 1-165-531-11 | MYLAR 1UF 10 275V | KLV-S40A10 | |
| 1255 | | G3 | CAPACITOR | | C6113 | 1-112-024-21 | MYLAR 1UF 10% 450V | KLV-S40A10 | |
| 1256 | | G3 | CAPACITOR | | C6114 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | KLV-S40A10 | |
| 1257 | | G3 | CAPACITOR | | C6115 | 1-112-188-11 | MYLAR 1.5UF 5% 450V | KLV-S40A10 | |
| 1258 | | G3 | CAPACITOR | | C6116 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S40A10 | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-----------|--------------|----------|--------------|---------------------------------|------------|-----------|
| 1259 | | G3 | CAPACITOR | | C6117 | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V | KLV-S40A10 | |
| 1260 | | G3 | CAPACITOR | | C6118 | 1-162-962-11 | CERAMIC CHIP 470PF 10.00% 50V | KLV-S40A10 | |
| 1261 | | G3 | CAPACITOR | | C6119 | 1-119-886-51 | CERAMIC 470PF 10.00% 250V | KLV-S40A10 | |
| 1262 | | G3 | CAPACITOR | | C6120 | 1-128-526-11 | ELECT 100UF 20% 25V | KLV-S40A10 | |
| 1263 | | G3 | CAPACITOR | | C6121 | 1-163-037-11 | CERAMIC CHIP 0.022UF 10.00% 50V | KLV-S40A10 | |
| 1264 | | G3 | CAPACITOR | | C6122 | 1-107-889-11 | ELECT 220UF 20% 25V | KLV-S40A10 | |
| 1265 | | G3 | CAPACITOR | | C6123 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | KLV-S40A10 | |
| 1266 | | G3 | CAPACITOR | | C6124 | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V | KLV-S40A10 | |
| 1267 | | G3 | CAPACITOR | | C6125 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | KLV-S40A10 | |
| 1268 | | G3 | CAPACITOR | | C6126 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | KLV-S40A10 | |
| 1269 | | G3 | CAPACITOR | | C6127 | 1-104-760-11 | CERAMIC CHIP 0.047UF 10.00% 50V | KLV-S40A10 | |
| 1270 | | G3 | CAPACITOR | | C6128 | 1-100-613-81 | CERAMIC 470PF 5% 1KV | KLV-S40A10 | |
| 1271 | | G3 | CAPACITOR | | C6129 | 1-100-613-81 | CERAMIC 470PF 5% 1KV | KLV-S40A10 | |
| 1272 | | G3 | CAPACITOR | | C6130 | 1-163-145-00 | CERAMIC CHIP 0.0015UF 5.00% 50V | KLV-S40A10 | |
| 1273 | | G3 | CAPACITOR | | C6131 | 1-100-613-81 | CERAMIC 470PF 5% 1KV | KLV-S40A10 | |
| 1274 | | G3 | CAPACITOR | | C6132 | 1-100-613-81 | CERAMIC 470PF 5% 1KV | KLV-S40A10 | |
| 1275 | | G3 | CAPACITOR | | C6133 | 1-135-361-11 | ELECT 180UF 20% 450V | KLV-S40A10 | |
| 1276 | | G3 | CAPACITOR | | C6134 | 1-135-361-11 | ELECT 180UF 20% 450V | KLV-S40A10 | |
| 1277 | | G3 | CAPACITOR | | C6135 | 1-135-361-11 | ELECT 180UF 20% 450V | KLV-S40A10 | |
| 1278 | | G3 | CAPACITOR | | C6136 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S40A10 | |
| 1279 | | G3 | CAPACITOR | | C6137 | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V | KLV-S40A10 | |
| 1280 | | G3 | CAPACITOR | | C6139 | 1-107-903-11 | ELECT 2.2UF 20% 50V | KLV-S40A10 | |
| 1281 | | G3 | CAPACITOR | | C6140 | 1-112-188-11 | MYLAR 1.5UF 5% 450V | KLV-S40A10 | |
| 1282 | | G3 | CAPACITOR | | C6141 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | KLV-S40A10 | |
| 1283 | | G3 | CAPACITOR | | C6300 | 1-115-350-51 | CERAMIC 0.0047UF 2KV | KLV-S40A10 | |
| 1284 | | G3 | CAPACITOR | | C6301 | 1-115-350-51 | CERAMIC 0.0047UF 2KV | KLV-S40A10 | |
| 1285 | | G3 | CAPACITOR | | C6304 | 1-107-680-91 | ELECT 22UF 20.00% 450V | KLV-S40A10 | |
| 1286 | | G3 | CAPACITOR | | C6305 | 1-107-974-11 | CERAMIC 47PF 5.00% 2KV | KLV-S40A10 | |
| 1287 | | G3 | CAPACITOR | | C6306 | 1-107-905-11 | ELECT 4.7UF 20% 50V | KLV-S40A10 | |
| 1288 | | G3 | CAPACITOR | | C6307 | 1-102-228-00 | CERAMIC 470PF 10.00% 500V | KLV-S40A10 | |
| 1289 | | G3 | CAPACITOR | | C6308 | 1-107-903-11 | ELECT 2.2UF 20% 50V | KLV-S40A10 | |
| 1290 | | G3 | CAPACITOR | | C6309 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S40A10 | |
| 1291 | | G3 | CAPACITOR | | C6312 | 1-107-910-11 | ELECT 100UF 20% 50V | KLV-S40A10 | |
| 1292 | | G3 | CAPACITOR | | C6313 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | KLV-S40A10 | |
| 1293 | | G3 | CAPACITOR | | C6314 | 1-119-886-51 | CERAMIC 470PF 10.00% 250V | KLV-S40A10 | |
| 1294 | | G3 | CAPACITOR | | C6316 | 1-128-949-31 | ELECT 470UF 20% 16V | KLV-S40A10 | |
| 1295 | | G3 | CAPACITOR | | C6317 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | KLV-S40A10 | |
| 1296 | | G3 | CAPACITOR | | C6318 | 1-128-526-11 | ELECT 100UF 20% 25V | KLV-S40A10 | |
| 1297 | | G3 | CAPACITOR | | C6320 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S40A10 | |
| 1298 | | G3 | CAPACITOR | | C6321 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S40A10 | |
| 1299 | | G3 | CAPACITOR | | C6400 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S40A10 | |
| 1300 | | G3 | CAPACITOR | | C6401 | 1-104-653-11 | ELECT 220UF 20% 16V | KLV-S40A10 | |
| 1301 | | G3 | CAPACITOR | | C6403 | 1-107-902-11 | ELECT 1UF 20% 50V | KLV-S40A10 | |
| 1302 | | G3 | CAPACITOR | | C6404 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | KLV-S40A10 | |
| 1303 | | G3 | CAPACITOR | | C6420 | 1-163-037-11 | CERAMIC CHIP 0.022UF 10.00% 50V | KLV-S40A10 | |
| 1304 | | G3 | CAPACITOR | | C6421 | 1-107-906-11 | ELECT 10UF 20% 50V | KLV-S40A10 | |
| 1305 | | G3 | CAPACITOR | | C6422 | 1-163-037-11 | CERAMIC CHIP 0.022UF 10.00% 50V | KLV-S40A10 | |
| 1306 | | G3 | CAPACITOR | | C6423 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S40A10 | |
| 1307 | | G3 | CAPACITOR | | C6424 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S40A10 | |
| 1308 | | G3 | CAPACITOR | | C6425 | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V | KLV-S40A10 | |
| 1309 | | G3 | CAPACITOR | | C6426 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S40A10 | |
| 1310 | | G3 | CAPACITOR | | C6427 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S40A10 | |
| 1311 | | G3 | CAPACITOR | | C6428 | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V | KLV-S40A10 | |
| 1312 | | G3 | CAPACITOR | | C6429 | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V | KLV-S40A10 | |
| 1313 | | G3 | CAPACITOR | | C6430 | 1-107-905-11 | ELECT 4.7UF 20% 50V | KLV-S40A10 | |
| 1314 | | G3 | CAPACITOR | | C6431 | 1-107-888-11 | ELECT 47UF 20% 25V | KLV-S40A10 | |
| 1315 | | G3 | CAPACITOR | | C6432 | 1-107-905-11 | ELECT 4.7UF 20% 50V | KLV-S40A10 | |
| 1316 | | G3 | CAPACITOR | | C6433 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S40A10 | |
| 1317 | | G3 | CAPACITOR | | C6434 | 1-107-902-11 | ELECT 1UF 20% 50V | KLV-S40A10 | |
| 1318 | | G3 | CAPACITOR | | C6435 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S40A10 | |
| 1319 | | G3 | CAPACITOR | | C6436 | 1-107-910-11 | ELECT 100UF 20% 50V | KLV-S40A10 | |
| 1320 | | G3 | CAPACITOR | | C6437 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S40A10 | |
| 1321 | | G3 | CAPACITOR | | C6439 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S40A10 | |
| 1322 | | G3 | CAPACITOR | | C6472 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S40A10 | |
| 1323 | | G3 | CAPACITOR | | C6500 | 1-112-744-51 | CAP, METALIZED PET FILM 1.0MF | KLV-S40A10 | |
| 1324 | | G3 | CAPACITOR | | C6501 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S40A10 | |
| 1325 | | G3 | CAPACITOR | | C6502 | 1-107-905-11 | ELECT 4.7UF 20% 50V | KLV-S40A10 | |
| 1326 | | G3 | CAPACITOR | | C6503 | 1-107-909-11 | ELECT 47UF 20% 50V | KLV-S40A10 | |
| 1327 | | G3 | CAPACITOR | | C6504 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S40A10 | |
| 1328 | | G3 | CAPACITOR | | C6505 | 1-100-831-91 | CERAMIC CHIP 0.001UF 2% 50V | KLV-S40A10 | |
| 1329 | | G3 | CAPACITOR | | C6506 | 1-107-906-11 | ELECT 10UF 20% 50V | KLV-S40A10 | |
| 1330 | | G3 | CAPACITOR | | C6508 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S40A10 | |
| 1331 | | G3 | CAPACITOR | | C6509 | 1-136-169-00 | FILM 0.22UF 5.00% 50V | KLV-S40A10 | |
| 1332 | | G3 | CAPACITOR | | C6510 | 1-107-888-11 | ELECT 47UF 20% 25V | KLV-S40A10 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-----------|-----|----------|--------------|---------------------------------|------------|-----------|
| 1333 | | G3 | CAPACITOR | | C6511 | 1-107-824-11 | CERAMIC 220PF 5.00% 1KV | KLV-S40A10 | |
| 1334 | | G3 | CAPACITOR | | C6512 | 1-107-824-11 | CERAMIC 220PF 5.00% 1KV | KLV-S40A10 | |
| 1335 | | G3 | CAPACITOR | | C6513 | 1-165-953-11 | FILM 47000PF 3% 800V | KLV-S40A10 | |
| 1336 | | G3 | CAPACITOR | | C6600 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S40A10 | |
| 1337 | | G3 | CAPACITOR | | C6602 | 1-131-969-11 | ELECT 1800UF 20% 25V | KLV-S40A10 | |
| 1338 | | G3 | CAPACITOR | | C6603 | 1-131-969-11 | ELECT 1800UF 20% 25V | KLV-S40A10 | |
| 1339 | | G3 | CAPACITOR | | C6604 | 1-131-969-11 | ELECT 1800UF 20% 25V | KLV-S40A10 | |
| 1340 | | G3 | CAPACITOR | | C6607 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S40A10 | |
| 1341 | | G3 | CAPACITOR | | C6608 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S40A10 | |
| 1342 | | G3 | CAPACITOR | | C6609 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S40A10 | |
| 1343 | | G3 | CAPACITOR | | C6610 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S40A10 | |
| 1344 | | G3 | CAPACITOR | | C6700 | 1-112-745-51 | CAP, METALIZED PET FILM 0.47MF | KLV-S40A10 | |
| 1345 | | G3 | CAPACITOR | | C6701 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S40A10 | |
| 1346 | | G3 | CAPACITOR | | C6702 | 1-107-905-11 | ELECT 4.7UF 20% 50V | KLV-S40A10 | |
| 1347 | | G3 | CAPACITOR | | C6704 | 1-107-909-11 | ELECT 47UF 20% 50V | KLV-S40A10 | |
| 1348 | | G3 | CAPACITOR | | C6705 | 1-100-831-91 | CERAMIC CHIP 0.001UF 2% 50V | KLV-S40A10 | |
| 1349 | | G3 | CAPACITOR | | C6706 | 1-107-906-11 | ELECT 10UF 20% 50V | KLV-S40A10 | |
| 1350 | | G3 | CAPACITOR | | C6707 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | KLV-S40A10 | |
| 1351 | | G3 | CAPACITOR | | C6708 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S40A10 | |
| 1352 | | G3 | CAPACITOR | | C6709 | 1-136-169-00 | FILM 0.22UF 5.00% 50V | KLV-S40A10 | |
| 1353 | | G3 | CAPACITOR | | C6710 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | KLV-S40A10 | |
| 1354 | | G3 | CAPACITOR | | C6713 | 1-107-888-11 | ELECT 47UF 20% 25V | KLV-S40A10 | |
| 1355 | | G3 | CAPACITOR | | C6714 | 1-107-910-11 | ELECT 100UF 20% 50V | KLV-S40A10 | |
| 1356 | | G3 | CAPACITOR | | C6715 | 1-107-824-11 | CERAMIC 220PF 5.00% 1KV | KLV-S40A10 | |
| 1357 | | G3 | CAPACITOR | | C6716 | 1-107-824-11 | CERAMIC 220PF 5.00% 1KV | KLV-S40A10 | |
| 1358 | | G3 | CAPACITOR | | C6717 | 1-100-919-11 | FILM 0.027UF 3% 1KV | KLV-S40A10 | |
| 1359 | | G3 | CAPACITOR | | C6718 | 1-119-886-51 | CERAMIC 470PF 10.00% 250V | KLV-S40A10 | |
| 1360 | | G3 | CAPACITOR | | C6800 | 1-126-967-11 | ELECT 47UF 20.00% 50V | KLV-S40A10 | |
| 1361 | | G3 | CAPACITOR | | C6801 | 1-128-582-11 | ELECT 10UF 20.00% 100V | KLV-S40A10 | |
| 1362 | | G3 | CAPACITOR | | C6802 | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V | KLV-S40A10 | |
| 1363 | | G3 | CAPACITOR | | C6803 | 1-128-959-31 | ELECT 1000UF 20% 35V | KLV-S40A10 | |
| 1364 | | G3 | CAPACITOR | | C6805 | 1-131-970-11 | ELECT 1500UF 20% 25V | KLV-S40A10 | |
| 1365 | | G3 | CAPACITOR | | C6806 | 1-128-951-31 | ELECT 2200UF 20% 16V | KLV-S40A10 | |
| 1366 | | G3 | CAPACITOR | | C6809 | 1-107-928-11 | ELECT 4.7UF 20% 100V | KLV-S40A10 | |
| 1367 | | G3 | CAPACITOR | | C6811 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | KLV-S40A10 | |
| 1368 | | G3 | CONNECTOR | * | CN6001 | 1-691-960-11 | PIN, CONNECTOR (PC BOARD) 3P | KLV-S40A10 | |
| 1369 | | G3 | CONNECTOR | | CN6200 | 1-794-519-21 | PIN, CONNECTOR (PC BOARD) 14P | KLV-S40A10 | |
| 1370 | | G3 | CONNECTOR | * | CN6201 | 1-564-508-11 | PLUG, CONNECTOR 5P | KLV-S40A10 | |
| 1371 | | G3 | CONNECTOR | | CN6202 | 1-816-296-21 | PIN, CONNECTOR (PC BOARD) 9P | KLV-S40A10 | |
| 1372 | | G3 | CONNECTOR | | CN6204 | 1-779-992-11 | PIN, CONNECTOR (PWB) 8P | KLV-S40A10 | |
| 1373 | | G3 | DIODE | | D6001 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S40A10 | |
| 1374 | | G3 | DIODE | | D6100 | 8-719-304-63 | DIODE RM11C | KLV-S40A10 | |
| 1375 | | G3 | DIODE | | D6102 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S40A10 | |
| 1376 | | G3 | DIODE | | D6103 | 8-719-978-33 | DIODE DTZ-TT11-6.8B | KLV-S40A10 | |
| 1377 | | G3 | DIODE | | D6104 | 8-719-054-89 | DIODE D15XB60 | KLV-S40A10 | |
| 1378 | | G3 | DIODE | | D6105 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S40A10 | |
| 1379 | | G3 | DIODE | | D6106 | 6-500-137-01 | DIODE BAT54HT1 | KLV-S40A10 | |
| 1380 | | G3 | DIODE | | D6107 | 8-719-304-63 | DIODE RM11C | KLV-S40A10 | |
| 1381 | | G3 | DIODE | | D6108 | 6-500-254-01 | DIODE MM3Z7V5T1 | KLV-S40A10 | |
| 1382 | | G3 | DIODE | | D6109 | 6-500-137-01 | DIODE BAT54HT1 | KLV-S40A10 | |
| 1383 | | G3 | DIODE | | D6110 | 6-500-137-01 | DIODE BAT54HT1 | KLV-S40A10 | |
| 1384 | | G3 | DIODE | | D6111 | 8-719-041-97 | DIODE MA113-(TX) | KLV-S40A10 | |
| 1385 | | G3 | DIODE | | D6112 | 8-719-041-97 | DIODE MA113-(TX) | KLV-S40A10 | |
| 1386 | | G3 | DIODE | | D6113 | 6-501-043-01 | DIODE UMZ16NT106 | KLV-S40A10 | |
| 1387 | | G3 | DIODE | | D6114 | 6-501-043-01 | DIODE UMZ16NT106 | KLV-S40A10 | |
| 1388 | | G3 | DIODE | | D6115 | 6-501-043-01 | DIODE UMZ16NT106 | KLV-S40A10 | |
| 1389 | | G3 | DIODE | | D6117 | 8-719-304-63 | DIODE RM11C | KLV-S40A10 | |
| 1390 | | G3 | DIODE | | D6118 | 6-500-407-01 | DIODE SF20L60U-4015 | KLV-S40A10 | |
| 1391 | | G3 | DIODE | | D6121 | 8-719-041-97 | DIODE MA113-(TX) | KLV-S40A10 | |
| 1392 | | G3 | DIODE | | D6122 | 6-500-849-01 | DIODE ERA22-08KFLB | KLV-S40A10 | |
| 1393 | | G3 | DIODE | | D6123 | 6-500-849-01 | DIODE ERA22-08KFLB | KLV-S40A10 | |
| 1394 | | G3 | DIODE | | D6300 | 8-719-077-76 | DIODE D2SB60A-F04 | KLV-S40A10 | |
| 1395 | | G3 | DIODE | | D6301 | 8-719-948-45 | DIODE ERA22-08 | KLV-S40A10 | |
| 1396 | | G3 | DIODE | | D6302 | 8-719-069-55 | DIODE UDZSTE-175.6B | KLV-S40A10 | |
| 1397 | | G3 | DIODE | | D6401 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S40A10 | |
| 1398 | | G3 | DIODE | | D6420 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S40A10 | |
| 1399 | | G3 | DIODE | | D6421 | 8-719-059-51 | DIODE MA3J142E0LSO | KLV-S40A10 | |
| 1400 | | G3 | DIODE | | D6422 | 8-719-083-63 | DIODE UDZSTE-1713B | KLV-S40A10 | |
| 1401 | | G3 | DIODE | | D6423 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S40A10 | |
| 1402 | | G3 | DIODE | | D6474 | 8-719-082-04 | DIODE MM3Z22VT1 | KLV-S40A10 | |
| 1403 | | G3 | DIODE | | D6475 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S40A10 | |
| 1404 | | G3 | DIODE | | D6500 | 8-719-082-03 | DIODE MM3Z15VT1 | KLV-S40A10 | |
| 1405 | | G3 | DIODE | | D6501 | 8-719-082-03 | DIODE MM3Z15VT1 | KLV-S40A10 | |
| 1406 | | G3 | DIODE | | D6502 | 8-719-082-03 | DIODE MM3Z15VT1 | KLV-S40A10 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|---------------|-----|----------|--------------|----------------------------|------------|-----------|
| 1407 | | G3 | DIODE | | D6503 | 8-719-979-64 | DIODE UF4005/23 | KLV-S40A10 | |
| 1408 | | G3 | DIODE | | D6504 | 6-501-043-01 | DIODE UMZ16NT106 | KLV-S40A10 | |
| 1409 | | G3 | DIODE | | D6505 | 6-501-043-01 | DIODE UMZ16NT106 | KLV-S40A10 | |
| 1410 | | G3 | DIODE | | D6506 | 8-719-080-69 | DIODE M1FS4-4063 | KLV-S40A10 | |
| 1411 | | G3 | DIODE | | D6507 | 8-719-080-69 | DIODE M1FS4-4063 | KLV-S40A10 | |
| 1412 | | G3 | DIODE | | D6508 | 8-719-082-03 | DIODE MM3Z15VT1 | KLV-S40A10 | |
| 1413 | | G3 | DIODE | | D6509 | 8-719-080-69 | DIODE M1FS4-4063 | KLV-S40A10 | |
| 1414 | | G3 | DIODE | | D6600 | 6-501-319-01 | DIODE FCQ10A06 | KLV-S40A10 | |
| 1415 | | G3 | DIODE | | D6601 | 6-501-319-01 | DIODE FCQ10A06 | KLV-S40A10 | |
| 1416 | | G3 | DIODE | | D6602 | 6-501-319-01 | DIODE FCQ10A06 | KLV-S40A10 | |
| 1417 | | G3 | DIODE | | D6603 | 6-501-319-01 | DIODE FCQ10A06 | KLV-S40A10 | |
| 1418 | | G3 | DIODE | | D6604 | 8-719-079-29 | DIODE PTZ-TE25-22B | KLV-S40A10 | |
| 1419 | | G3 | DIODE | | D6700 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S40A10 | |
| 1420 | | G3 | DIODE | | D6701 | 8-719-082-03 | DIODE MM3Z15VT1 | KLV-S40A10 | |
| 1421 | | G3 | DIODE | | D6702 | 8-719-082-03 | DIODE MM3Z15VT1 | KLV-S40A10 | |
| 1422 | | G3 | DIODE | | D6703 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S40A10 | |
| 1423 | | G3 | DIODE | | D6704 | 8-719-082-03 | DIODE MM3Z15VT1 | KLV-S40A10 | |
| 1424 | | G3 | DIODE | | D6705 | 8-719-979-64 | DIODE UF4005/23 | KLV-S40A10 | |
| 1425 | | G3 | DIODE | | D6706 | 6-501-043-01 | DIODE UMZ16NT106 | KLV-S40A10 | |
| 1426 | | G3 | DIODE | | D6707 | 6-501-043-01 | DIODE UMZ16NT106 | KLV-S40A10 | |
| 1427 | | G3 | DIODE | | D6709 | 6-500-567-31 | DIODE 10ERB20-TB3 | KLV-S40A10 | |
| 1428 | | G3 | DIODE | | D6710 | 8-719-080-69 | DIODE M1FS4-4063 | KLV-S40A10 | |
| 1429 | | G3 | DIODE | | D6711 | 8-719-080-69 | DIODE M1FS4-4063 | KLV-S40A10 | |
| 1430 | | G3 | DIODE | | D6712 | 8-719-082-03 | DIODE MM3Z15VT1 | KLV-S40A10 | |
| 1431 | | G3 | DIODE | | D6713 | 8-719-080-69 | DIODE M1FS4-4063 | KLV-S40A10 | |
| 1432 | | G3 | DIODE | | D6800 | 8-719-041-97 | DIODE MA113-(TX) | KLV-S40A10 | |
| 1433 | | G3 | DIODE | | D6803 | 8-719-063-73 | DIODE D1NL20U-TR | KLV-S40A10 | |
| 1434 | | G3 | DIODE | | D6804 | 6-500-747-01 | DIODE SBQF04A06 | KLV-S40A10 | |
| 1435 | | G3 | DIODE | | D6805 | 8-719-063-73 | DIODE D1NL20U-TR | KLV-S40A10 | |
| 1436 | | G3 | DIODE | | D6806 | 6-501-319-01 | DIODE FCQ10A06 | KLV-S40A10 | |
| 1437 | | G3 | DIODE | | D6807 | 6-501-319-01 | DIODE FCQ10A06 | KLV-S40A10 | |
| 1438 | | G3 | DIODE | | D6903 | 6-500-567-31 | DIODE 10ERB20-TB3 | KLV-S40A10 | |
| 1439 | | G3 | DIODE | | D6904 | 8-719-032-12 | DIODE D1NS6 | KLV-S40A10 | |
| 1440 | | G3 | DIODE | | D6905 | 6-500-567-31 | DIODE 10ERB20-TB3 | KLV-S40A10 | |
| 1441 | | G3 | DIODE | | D6911 | 8-719-081-97 | DIODE MMDL914T1 | KLV-S40A10 | |
| 1442 | | G3 | DIODE | | D6912 | 8-719-948-45 | DIODE ERA22-08 | KLV-S40A10 | |
| 1443 | | G3 | FUSE | △ | F6001 | 1-576-233-51 | FUSE 6.3A 250V | KLV-S40A10 | |
| 1444 | | G3 | FERRITE BEAD | | FB6500 | 1-410-397-21 | FERRITE 1.1UH | KLV-S40A10 | |
| 1445 | | G3 | FERRITE BEAD | | FB6501 | 1-410-397-21 | FERRITE 1.1UH | KLV-S40A10 | |
| 1446 | | G3 | FUSE HOLDER | | FH6001 | 1-533-223-11 | FUSE HOLDER 0A 0V | KLV-S40A10 | |
| 1447 | | G3 | FUSE HOLDER | | FH6002 | 1-533-223-11 | FUSE HOLDER 0A 0V | KLV-S40A10 | |
| 1448 | | G3 | IC | | IC6100 | 6-703-132-01 | IC UC3854BN | KLV-S40A10 | |
| 1449 | | G3 | IC | | IC6101 | 8-759-682-42 | IC MM1431ATT | KLV-S40A10 | |
| 1450 | | G3 | IC | | IC6300 | 6-600-279-01 | IC STR-A6169 | KLV-S40A10 | |
| 1451 | | G3 | IC | | IC6301 | 8-759-682-42 | IC MM1431ATT | KLV-S40A10 | |
| 1452 | | G3 | IC | | IC6420 | 8-759-058-50 | IC XRA10324AF | KLV-S40A10 | |
| 1453 | | G3 | IC | | IC6421 | 6-704-924-01 | IC PQ12DZ5UJ00H | KLV-S40A10 | |
| 1454 | | G3 | IC | | IC6422 | 8-759-682-42 | IC MM1431ATT | KLV-S40A10 | |
| 1455 | | G3 | IC | | IC6500 | 6-706-852-01 | IC CXD9841M | KLV-S40A10 | |
| 1456 | | G3 | IC | | IC6600 | 8-759-682-42 | IC MM1431ATT | KLV-S40A10 | |
| 1457 | | G3 | IC | | IC6700 | 6-706-852-01 | IC CXD9841M | KLV-S40A10 | |
| 1458 | | G3 | IC | | IC6800 | 8-759-682-42 | IC MM1431ATT | KLV-S40A10 | |
| 1459 | | G3 | COIL | | L6002 | 1-456-856-21 | LINE FILTER COIL | KLV-S40A10 | |
| 1460 | | G3 | COIL | | L6003 | 1-456-856-21 | LINE FILTER COIL | KLV-S40A10 | |
| 1461 | | G3 | COIL | | L6101 | 1-456-917-11 | INDUCTOR 170UH | KLV-S40A10 | |
| 1462 | | G3 | COIL | | L6102 | 1-456-854-11 | INDUCTOR 58UH | KLV-S40A10 | |
| 1463 | | G3 | COIL | | L6104 | 1-456-854-11 | INDUCTOR 58UH | KLV-S40A10 | |
| 1464 | | G3 | COIL | | L6300 | 1-412-525-31 | INDUCTOR 10UH | KLV-S40A10 | |
| 1465 | | G3 | COIL | | L6500 | 1-406-665-11 | INDUCTOR 100UH | KLV-S40A10 | |
| 1466 | | G3 | COIL | | L6601 | 1-406-971-21 | INDUCTOR 10UH | KLV-S40A10 | |
| 1467 | | G3 | COIL | | L6602 | 1-406-971-21 | INDUCTOR 10UH | KLV-S40A10 | |
| 1468 | | G3 | COIL | | L6603 | 1-406-971-21 | INDUCTOR 10UH | KLV-S40A10 | |
| 1469 | | G3 | COIL | | L6700 | 1-406-667-11 | INDUCTOR 220UH | KLV-S40A10 | |
| 1470 | | G3 | COIL | | L6800 | 1-406-971-21 | INDUCTOR 10UH | KLV-S40A10 | |
| 1471 | | G3 | COIL | | L6801 | 1-406-971-21 | INDUCTOR 10UH | KLV-S40A10 | |
| 1472 | | G3 | PHOTO COUPLER | | PH6000 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | KLV-S40A10 | |
| 1473 | | G3 | PHOTO COUPLER | | PH6300 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | KLV-S40A10 | |
| 1474 | | G3 | PHOTO COUPLER | | PH6420 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | KLV-S40A10 | |
| 1475 | | G3 | PHOTO COUPLER | | PH6421 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | KLV-S40A10 | |
| 1476 | | G3 | PHOTO COUPLER | | PH6474 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | KLV-S40A10 | |
| 1477 | | G3 | PHOTO COUPLER | | PH6500 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | KLV-S40A10 | |
| 1478 | | G3 | PHOTO COUPLER | | PH6700 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | KLV-S40A10 | |
| 1479 | | G3 | TRANSISTOR | | Q6101 | 8-729-907-00 | TRANSISTOR DTC114EU | KLV-S40A10 | |
| 1480 | | G3 | TRANSISTOR | | Q6102 | 8-729-820-86 | TRANSISTOR 2SB1121-ST | KLV-S40A10 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|------------|-----|----------|--------------|------------------------------|------------|-----------|
| 1481 | | G3 | TRANSISTOR | | Q6103 | 8-729-905-35 | TRANSISTOR 2SC4081-R | KLV-S40A10 | |
| 1482 | | G3 | TRANSISTOR | | Q6104 | 8-729-807-17 | TRANSISTOR 2SD1621-S | KLV-S40A10 | |
| 1483 | | G3 | TRANSISTOR | | Q6105 | 6-550-372-01 | TRANSISTOR SPA20N60C3E8152 | KLV-S40A10 | |
| 1484 | | G3 | TRANSISTOR | | Q6106 | 6-550-372-01 | TRANSISTOR SPA20N60C3E8152 | KLV-S40A10 | |
| 1485 | | G3 | TRANSISTOR | | Q6107 | 6-550-372-01 | TRANSISTOR SPA20N60C3E8152 | KLV-S40A10 | |
| 1486 | | G3 | TRANSISTOR | | Q6400 | 8-729-023-22 | TRANSISTOR 2SD2114K | KLV-S40A10 | |
| 1487 | | G3 | TRANSISTOR | | Q6403 | 8-729-026-49 | TRANSISTOR 2SA1037AK-T146-R | KLV-S40A10 | |
| 1488 | | G3 | TRANSISTOR | | Q6404 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | KLV-S40A10 | |
| 1489 | | G3 | TRANSISTOR | | Q6420 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | KLV-S40A10 | |
| 1490 | | G3 | TRANSISTOR | | Q6421 | 8-729-905-35 | TRANSISTOR 2SC4081-R | KLV-S40A10 | |
| 1491 | | G3 | TRANSISTOR | | Q6422 | 8-729-905-35 | TRANSISTOR 2SC4081-R | KLV-S40A10 | |
| 1492 | | G3 | TRANSISTOR | | Q6423 | 8-729-905-35 | TRANSISTOR 2SC4081-R | KLV-S40A10 | |
| 1493 | | G3 | TRANSISTOR | | Q6424 | 8-729-905-35 | TRANSISTOR 2SC4081-R | KLV-S40A10 | |
| 1494 | | G3 | TRANSISTOR | | Q6425 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | KLV-S40A10 | |
| 1495 | | G3 | TRANSISTOR | | Q6426 | 8-729-907-00 | TRANSISTOR DTC114EU | KLV-S40A10 | |
| 1496 | | G3 | TRANSISTOR | | Q6427 | 8-729-905-35 | TRANSISTOR 2SC4081-R | KLV-S40A10 | |
| 1497 | | G3 | TRANSISTOR | | Q6428 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | KLV-S40A10 | |
| 1498 | | G3 | TRANSISTOR | | Q6429 | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR | KLV-S40A10 | |
| 1499 | | G3 | TRANSISTOR | | Q6430 | 8-729-804-41 | TRANSISTOR 2SB1122-S | KLV-S40A10 | |
| 1500 | | G3 | TRANSISTOR | | Q6431 | 8-729-907-00 | TRANSISTOR DTC114EU | KLV-S40A10 | |
| 1501 | | G3 | TRANSISTOR | | Q6500 | 6-550-526-11 | TRANSISTOR 2SK2842(LBS2SONY) | KLV-S40A10 | |
| 1502 | | G3 | TRANSISTOR | | Q6501 | 6-550-526-11 | TRANSISTOR 2SK2842(LBS2SONY) | KLV-S40A10 | |
| 1503 | | G3 | TRANSISTOR | | Q6700 | 6-550-526-11 | TRANSISTOR 2SK2842(LBS2SONY) | KLV-S40A10 | |
| 1504 | | G3 | TRANSISTOR | | Q6701 | 6-550-526-11 | TRANSISTOR 2SK2842(LBS2SONY) | KLV-S40A10 | |
| 1505 | | G3 | RESISTOR | | R6001 | 1-247-289-00 | METAL 8.2M 5% 1W | KLV-S40A10 | |
| 1506 | | G3 | RESISTOR | | R6002 | 1-219-759-11 | METAL 1M 5% 1/2W | KLV-S40A10 | |
| 1507 | | G3 | RESISTOR | | R6003 | 1-216-789-11 | METAL CHIP 2.2 5% 1/10W | KLV-S40A10 | |
| 1508 | | G3 | RESISTOR | | R6004 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S40A10 | |
| 1509 | | G3 | RESISTOR | | R6007 | 1-219-759-11 | METAL 1M 5% 1/2W | KLV-S40A10 | |
| 1510 | | G3 | RESISTOR | | R6014 | 1-215-859-00 | METAL OXIDE 22 5% 1W | KLV-S40A10 | |
| 1511 | | G3 | RESISTOR | | R6016 | 1-243-681-71 | METAL OXIDE 33 5% 1W | KLV-S40A10 | |
| 1512 | | G3 | RESISTOR | | R6101 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S40A10 | |
| 1513 | | G3 | RESISTOR | | R6103 | 1-218-903-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S40A10 | |
| 1514 | | G3 | RESISTOR | | R6104 | 1-245-474-21 | METAL 330K 1% 1/4W | KLV-S40A10 | |
| 1515 | | G3 | RESISTOR | | R6105 | 1-245-474-21 | METAL 330K 1% 1/4W | KLV-S40A10 | |
| 1516 | | G3 | RESISTOR | | R6106 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1517 | | G3 | RESISTOR | | R6107 | 1-245-474-21 | METAL 330K 1% 1/4W | KLV-S40A10 | |
| 1518 | | G3 | RESISTOR | | R6108 | 1-245-474-21 | METAL 330K 1% 1/4W | KLV-S40A10 | |
| 1519 | | G3 | RESISTOR | | R6109 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1520 | | G3 | RESISTOR | | R6110 | 1-218-895-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1521 | | G3 | RESISTOR | | R6111 | 1-218-877-11 | METAL CHIP 18K 0.5% 1/10W | KLV-S40A10 | |
| 1522 | | G3 | RESISTOR | | R6112 | 1-245-474-21 | METAL 330K 1% 1/4W | KLV-S40A10 | |
| 1523 | | G3 | RESISTOR | | R6113 | 1-245-474-21 | METAL 330K 1% 1/4W | KLV-S40A10 | |
| 1524 | | G3 | RESISTOR | | R6114 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1525 | | G3 | RESISTOR | | R6115 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | KLV-S40A10 | |
| 1526 | | G3 | RESISTOR | | R6116 | 1-218-845-11 | METAL CHIP 820 0.5% 1/10W | KLV-S40A10 | |
| 1527 | | G3 | RESISTOR | | R6117 | 1-216-835-11 | METAL CHIP 15K 5% 1/10W | KLV-S40A10 | |
| 1528 | | G3 | RESISTOR | | R6118 | 1-216-830-11 | METAL CHIP 5.6K 5% 1/10W | KLV-S40A10 | |
| 1529 | | G3 | RESISTOR | | R6119 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S40A10 | |
| 1530 | | G3 | RESISTOR | | R6120 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | KLV-S40A10 | |
| 1531 | | G3 | RESISTOR | | R6122 | 1-243-665-11 | METAL 0.05 5% 5W | KLV-S40A10 | |
| 1532 | | G3 | RESISTOR | | R6123 | 1-243-665-11 | METAL 0.05 5% 5W | KLV-S40A10 | |
| 1533 | | G3 | RESISTOR | | R6124 | 1-249-397-11 | CARBON 22 5% 1/4W | KLV-S40A10 | |
| 1534 | | G3 | RESISTOR | | R6125 | 1-216-797-11 | METAL CHIP 10 5% 1/10W | KLV-S40A10 | |
| 1535 | | G3 | RESISTOR | | R6126 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | KLV-S40A10 | |
| 1536 | | G3 | RESISTOR | | R6127 | 1-249-397-11 | CARBON 22 5% 1/4W | KLV-S40A10 | |
| 1537 | | G3 | RESISTOR | | R6128 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | KLV-S40A10 | |
| 1538 | | G3 | RESISTOR | | R6129 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1539 | | G3 | RESISTOR | | R6130 | 1-216-797-11 | METAL CHIP 10 5% 1/10W | KLV-S40A10 | |
| 1540 | | G3 | RESISTOR | | R6131 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1541 | | G3 | RESISTOR | | R6132 | 1-249-393-11 | CARBON 10 5% 1/4W | KLV-S40A10 | |
| 1542 | | G3 | RESISTOR | | R6133 | 1-249-401-11 | CARBON 47 5% 1/4W | KLV-S40A10 | |
| 1543 | | G3 | RESISTOR | | R6134 | 1-249-393-11 | CARBON 10 5% 1/4W | KLV-S40A10 | |
| 1544 | | G3 | RESISTOR | | R6135 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | KLV-S40A10 | |
| 1545 | | G3 | RESISTOR | | R6136 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1546 | | G3 | RESISTOR | | R6137 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | KLV-S40A10 | |
| 1547 | | G3 | RESISTOR | | R6138 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S40A10 | |
| 1548 | | G3 | RESISTOR | | R6139 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | KLV-S40A10 | |
| 1549 | | G3 | RESISTOR | | R6140 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S40A10 | |
| 1550 | | G3 | RESISTOR | | R6141 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1551 | | G3 | RESISTOR | | R6142 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1552 | | G3 | RESISTOR | | R6143 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1553 | | G3 | RESISTOR | | R6144 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1554 | | G3 | RESISTOR | | R6145 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |

| No. | # | Board | Type | Δ / [*] | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|----------|-------------------------|----------|--------------|----------------------------|------------|-----------|
| 1555 | | G3 | RESISTOR | | R6146 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1556 | | G3 | RESISTOR | | R6147 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1557 | | G3 | RESISTOR | | R6148 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1558 | | G3 | RESISTOR | | R6149 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1559 | | G3 | RESISTOR | | R6150 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1560 | | G3 | RESISTOR | | R6151 | 1-218-869-11 | METAL CHIP 8.2K 0.5% 1/10W | KLV-S40A10 | |
| 1561 | | G3 | RESISTOR | | R6152 | 1-218-851-11 | METAL CHIP 1.5K 0.5% 1/10W | KLV-S40A10 | |
| 1562 | | G3 | RESISTOR | | R6153 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | KLV-S40A10 | |
| 1563 | | G3 | RESISTOR | | R6154 | 1-216-835-11 | METAL CHIP 15K 5% 1/10W | KLV-S40A10 | |
| 1564 | | G3 | RESISTOR | | R6155 | 1-215-882-00 | METAL OXIDE 22 5% 2W | KLV-S40A10 | |
| 1565 | | G3 | RESISTOR | | R6156 | 1-215-882-00 | METAL OXIDE 22 5% 2W | KLV-S40A10 | |
| 1566 | | G3 | RESISTOR | | R6157 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1567 | | G3 | RESISTOR | | R6158 | 1-216-797-11 | METAL CHIP 10 5% 1/10W | KLV-S40A10 | |
| 1568 | | G3 | RESISTOR | | R6159 | 1-249-397-11 | CARBON 22 5% 1/4W | KLV-S40A10 | |
| 1569 | | G3 | RESISTOR | | R6160 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S40A10 | |
| 1570 | | G3 | RESISTOR | | R6161 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S40A10 | |
| 1571 | | G3 | RESISTOR | | R6162 | 1-216-842-11 | METAL CHIP 56K 5% 1/10W | KLV-S40A10 | |
| 1572 | | G3 | RESISTOR | | R6167 | 1-218-823-11 | METAL CHIP 100 0.5% 1/10W | KLV-S40A10 | |
| 1573 | | G3 | RESISTOR | | R6168 | 1-208-832-11 | METAL CHIP 120K 0.5% 1/10W | KLV-S40A10 | |
| 1574 | | G3 | RESISTOR | | R6169 | 1-208-832-11 | METAL CHIP 120K 0.5% 1/10W | KLV-S40A10 | |
| 1575 | | G3 | RESISTOR | | R6170 | 1-208-832-11 | METAL CHIP 120K 0.5% 1/10W | KLV-S40A10 | |
| 1576 | | G3 | RESISTOR | | R6300 | 1-216-353-00 | METAL OXIDE 2.2 5% 1W | KLV-S40A10 | |
| 1577 | | G3 | RESISTOR | | R6301 | 1-249-381-11 | CARBON 1 5% 1/4W | KLV-S40A10 | |
| 1578 | | G3 | RESISTOR | | R6302 | 1-260-129-11 | CARBON 330K 5% 1/2W | KLV-S40A10 | |
| 1579 | | G3 | RESISTOR | | R6303 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 1580 | | G3 | RESISTOR | | R6304 | 1-249-393-11 | CARBON 10 5% 1/4W | KLV-S40A10 | |
| 1581 | | G3 | RESISTOR | | R6305 | 1-249-385-11 | CARBON 2.2 5% 1/4W | KLV-S40A10 | |
| 1582 | | G3 | RESISTOR | | R6306 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | KLV-S40A10 | |
| 1583 | | G3 | RESISTOR | | R6307 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | KLV-S40A10 | |
| 1584 | | G3 | RESISTOR | | R6308 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | KLV-S40A10 | |
| 1585 | | G3 | RESISTOR | | R6309 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | KLV-S40A10 | |
| 1586 | | G3 | RESISTOR | | R6310 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 1587 | | G3 | RESISTOR | | R6311 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | KLV-S40A10 | |
| 1588 | | G3 | RESISTOR | | R6401 | 1-216-835-11 | METAL CHIP 15K 5% 1/10W | KLV-S40A10 | |
| 1589 | | G3 | RESISTOR | | R6402 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S40A10 | |
| 1590 | | G3 | RESISTOR | | R6404 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S40A10 | |
| 1591 | | G3 | RESISTOR | | R6405 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S40A10 | |
| 1592 | | G3 | RESISTOR | | R6409 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1593 | | G3 | RESISTOR | | R6412 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1594 | | G3 | RESISTOR | | R6413 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 1595 | | G3 | RESISTOR | | R6421 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | KLV-S40A10 | |
| 1596 | | G3 | RESISTOR | | R6422 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | KLV-S40A10 | |
| 1597 | | G3 | RESISTOR | | R6423 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1598 | | G3 | RESISTOR | | R6424 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S40A10 | |
| 1599 | | G3 | RESISTOR | | R6425 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | KLV-S40A10 | |
| 1600 | | G3 | RESISTOR | | R6426 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1601 | | G3 | RESISTOR | | R6427 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1602 | | G3 | RESISTOR | | R6428 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1603 | | G3 | RESISTOR | | R6429 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1604 | | G3 | RESISTOR | | R6430 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1605 | | G3 | RESISTOR | | R6431 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1606 | | G3 | RESISTOR | | R6432 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1607 | | G3 | RESISTOR | | R6433 | 1-216-835-11 | METAL CHIP 15K 5% 1/10W | KLV-S40A10 | |
| 1608 | | G3 | RESISTOR | | R6434 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1609 | | G3 | RESISTOR | | R6435 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | KLV-S40A10 | |
| 1610 | | G3 | RESISTOR | | R6436 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | KLV-S40A10 | |
| 1611 | | G3 | RESISTOR | | R6437 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1612 | | G3 | RESISTOR | | R6438 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1613 | | G3 | RESISTOR | | R6439 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S40A10 | |
| 1614 | | G3 | RESISTOR | | R6440 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S40A10 | |
| 1615 | | G3 | RESISTOR | | R6441 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | KLV-S40A10 | |
| 1616 | | G3 | RESISTOR | | R6442 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1617 | | G3 | RESISTOR | | R6443 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S40A10 | |
| 1618 | | G3 | RESISTOR | | R6444 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1619 | | G3 | RESISTOR | | R6445 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1620 | | G3 | RESISTOR | | R6446 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S40A10 | |
| 1621 | | G3 | RESISTOR | | R6447 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S40A10 | |
| 1622 | | G3 | RESISTOR | | R6448 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S40A10 | |
| 1623 | | G3 | RESISTOR | | R6449 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | KLV-S40A10 | |
| 1624 | | G3 | RESISTOR | | R6450 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | KLV-S40A10 | |
| 1625 | | G3 | RESISTOR | | R6451 | 1-216-797-11 | METAL CHIP 10 5% 1/10W | KLV-S40A10 | |
| 1626 | | G3 | RESISTOR | | R6452 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1627 | | G3 | RESISTOR | | R6453 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S40A10 | |
| 1628 | | G3 | RESISTOR | | R6454 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S40A10 | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|----------|--------------|----------|--------------|----------------------------|------------|-----------|
| 1629 | | G3 | RESISTOR | | R6455 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1630 | | G3 | RESISTOR | | R6456 | 1-218-853-11 | METAL CHIP 1.8K 0.5% 1/10W | KLV-S40A10 | |
| 1631 | | G3 | RESISTOR | | R6457 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | KLV-S40A10 | |
| 1632 | | G3 | RESISTOR | | R6458 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | KLV-S40A10 | |
| 1633 | | G3 | RESISTOR | | R6459 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1634 | | G3 | RESISTOR | | R6460 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | KLV-S40A10 | |
| 1635 | | G3 | RESISTOR | | R6461 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1636 | | G3 | RESISTOR | | R6462 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1637 | | G3 | RESISTOR | | R6463 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | KLV-S40A10 | |
| 1638 | | G3 | RESISTOR | | R6464 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1639 | | G3 | RESISTOR | | R6465 | 1-249-393-11 | CARBON 10 5% 1/4W | KLV-S40A10 | |
| 1640 | | G3 | RESISTOR | | R6466 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | KLV-S40A10 | |
| 1641 | | G3 | RESISTOR | | R6467 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1642 | | G3 | RESISTOR | | R6468 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | KLV-S40A10 | |
| 1643 | | G3 | RESISTOR | | R6469 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | KLV-S40A10 | |
| 1644 | | G3 | RESISTOR | | R6470 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 1645 | | G3 | RESISTOR | | R6474 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 1646 | | G3 | RESISTOR | | R6475 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | KLV-S40A10 | |
| 1647 | | G3 | RESISTOR | | R6476 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S40A10 | |
| 1648 | | G3 | RESISTOR | | R6477 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | KLV-S40A10 | |
| 1649 | | G3 | RESISTOR | | R6480 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1650 | | G3 | RESISTOR | | R6481 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S40A10 | |
| 1651 | | G3 | RESISTOR | | R6500 | 1-249-393-11 | CARBON 10 5% 1/4W | KLV-S40A10 | |
| 1652 | | G3 | RESISTOR | | R6501 | 1-202-933-61 | FUSIBLE 0.1 10% 1/2W | KLV-S40A10 | |
| 1653 | | G3 | RESISTOR | | R6502 | 1-218-823-11 | METAL CHIP 100 0.5% 1/10W | KLV-S40A10 | |
| 1654 | | G3 | RESISTOR | | R6503 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | KLV-S40A10 | |
| 1655 | | G3 | RESISTOR | | R6504 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S40A10 | |
| 1656 | | G3 | RESISTOR | | R6505 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S40A10 | |
| 1657 | | G3 | RESISTOR | | R6506 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S40A10 | |
| 1658 | | G3 | RESISTOR | | R6507 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | KLV-S40A10 | |
| 1659 | | G3 | RESISTOR | | R6508 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1660 | | G3 | RESISTOR | | R6509 | 1-218-854-11 | METAL CHIP 2K 0.5% 1/10W | KLV-S40A10 | |
| 1661 | | G3 | RESISTOR | | R6510 | 1-218-877-11 | METAL CHIP 18K 0.5% 1/10W | KLV-S40A10 | |
| 1662 | | G3 | RESISTOR | | R6513 | 1-211-990-11 | METAL CHIP 75 0.5% 1/10W | KLV-S40A10 | |
| 1663 | | G3 | RESISTOR | | R6514 | 1-212-865-00 | FUSIBLE 22 5% 1/4W | KLV-S40A10 | |
| 1664 | | G3 | RESISTOR | | R6515 | 1-212-865-00 | FUSIBLE 22 5% 1/4W | KLV-S40A10 | |
| 1665 | | G3 | RESISTOR | | R6516 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | KLV-S40A10 | |
| 1666 | | G3 | RESISTOR | | R6517 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | KLV-S40A10 | |
| 1667 | | G3 | RESISTOR | | R6518 | 1-219-759-11 | METAL 1M 5% 1/2W | KLV-S40A10 | |
| 1668 | | G3 | RESISTOR | | R6519 | 1-219-759-11 | METAL 1M 5% 1/2W | KLV-S40A10 | |
| 1669 | | G3 | RESISTOR | | R6520 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S40A10 | |
| 1670 | | G3 | RESISTOR | | R6521 | 1-216-361-00 | METAL OXIDE 0.22 5% 2W | KLV-S40A10 | |
| 1671 | | G3 | RESISTOR | | R6522 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 1672 | | G3 | RESISTOR | | R6523 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S40A10 | |
| 1673 | | G3 | RESISTOR | | R6524 | 1-216-361-00 | METAL OXIDE 0.22 5% 2W | KLV-S40A10 | |
| 1674 | | G3 | RESISTOR | | R6600 | 1-218-853-11 | METAL CHIP 1.8K 0.5% 1/10W | KLV-S40A10 | |
| 1675 | | G3 | RESISTOR | | R6601 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S40A10 | |
| 1676 | | G3 | RESISTOR | | R6602 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 1677 | | G3 | RESISTOR | | R6603 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1678 | | G3 | RESISTOR | | R6604 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | KLV-S40A10 | |
| 1679 | | G3 | RESISTOR | | R6605 | 1-218-865-11 | METAL CHIP 5.6K 0.5% 1/10W | KLV-S40A10 | |
| 1680 | | G3 | RESISTOR | | R6607 | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W | KLV-S40A10 | |
| 1681 | | G3 | RESISTOR | | R6610 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S40A10 | |
| 1682 | | G3 | RESISTOR | | R6611 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S40A10 | |
| 1683 | | G3 | RESISTOR | | R6700 | 1-249-393-11 | CARBON 10 5% 1/4W | KLV-S40A10 | |
| 1684 | | G3 | RESISTOR | | R6701 | 1-202-933-61 | FUSIBLE 0.1 10% 1/2W | KLV-S40A10 | |
| 1685 | | G3 | RESISTOR | | R6702 | 1-218-868-11 | METAL CHIP 7.5K 0.5% 1/10W | KLV-S40A10 | |
| 1686 | | G3 | RESISTOR | | R6703 | 1-208-840-11 | METAL CHIP 270K 0.5% 1/10W | KLV-S40A10 | |
| 1687 | | G3 | RESISTOR | | R6704 | 1-208-840-11 | METAL CHIP 270K 0.5% 1/10W | KLV-S40A10 | |
| 1688 | | G3 | RESISTOR | | R6705 | 1-218-877-11 | METAL CHIP 18K 0.5% 1/10W | KLV-S40A10 | |
| 1689 | | G3 | RESISTOR | | R6706 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S40A10 | |
| 1690 | | G3 | RESISTOR | | R6707 | 1-218-823-11 | METAL CHIP 100 0.5% 1/10W | KLV-S40A10 | |
| 1691 | | G3 | RESISTOR | | R6709 | 1-212-865-00 | FUSIBLE 22 5% 1/4W | KLV-S40A10 | |
| 1692 | | G3 | RESISTOR | | R6710 | 1-249-393-11 | CARBON 10 5% 1/4W | KLV-S40A10 | |
| 1693 | | G3 | RESISTOR | | R6711 | 1-212-865-00 | FUSIBLE 22 5% 1/4W | KLV-S40A10 | |
| 1694 | | G3 | RESISTOR | | R6712 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | KLV-S40A10 | |
| 1695 | | G3 | RESISTOR | | R6713 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1696 | | G3 | RESISTOR | | R6714 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1697 | | G3 | RESISTOR | | R6716 | 1-249-393-11 | CARBON 10 5% 1/4W | KLV-S40A10 | |
| 1698 | | G3 | RESISTOR | | R6717 | 1-216-361-00 | METAL OXIDE 0.22 5% 2W | KLV-S40A10 | |
| 1699 | | G3 | RESISTOR | | R6718 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S40A10 | |
| 1700 | | G3 | RESISTOR | | R6720 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1701 | | G3 | RESISTOR | | R6721 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1702 | | G3 | RESISTOR | | R6722 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-------------------|--------------|----------|--------------|------------------------------|------------|-----------|
| 1703 | | G3 | RESISTOR | | R6723 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | KLV-S40A10 | |
| 1704 | | G3 | RESISTOR | | R6800 | 1-216-295-91 | SHORT CHIP 0 | KLV-S40A10 | |
| 1705 | | G3 | RESISTOR | | R6802 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S40A10 | |
| 1706 | | G3 | RESISTOR | | R6803 | 1-249-377-11 | CARBON 0.47 5% 1/4W | KLV-S40A10 | |
| 1707 | | G3 | RESISTOR | | R6804 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 1708 | | G3 | RESISTOR | | R6806 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S40A10 | |
| 1709 | | G3 | RESISTOR | | R6807 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 1710 | | G3 | RESISTOR | | R6808 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 1711 | | G3 | RESISTOR | | R6809 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 1712 | | G3 | RESISTOR | | R6810 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 1713 | | G3 | RESISTOR | | R6811 | 1-249-393-11 | CARBON 10 5% 1/4W | KLV-S40A10 | |
| 1714 | | G3 | RESISTOR | | R6812 | 1-216-793-11 | METAL CHIP 4.7 5% 1/10W | KLV-S40A10 | |
| 1715 | | G3 | RESISTOR | | R6813 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | KLV-S40A10 | |
| 1716 | | G3 | RESISTOR | | R6817 | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W | KLV-S40A10 | |
| 1717 | | G3 | RESISTOR | | R6818 | 1-218-875-11 | METAL CHIP 15K 0.5% 1/10W | KLV-S40A10 | |
| 1718 | | G3 | RESISTOR | | R6819 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | KLV-S40A10 | |
| 1719 | | G3 | RESISTOR | | R6820 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | KLV-S40A10 | |
| 1720 | | G3 | RESISTOR | | R6821 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S40A10 | |
| 1721 | | G3 | RESISTOR | | R6822 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S40A10 | |
| 1722 | | G3 | RESISTOR | | R6823 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S40A10 | |
| 1723 | | G3 | RESISTOR | | R6838 | 1-247-752-11 | CARBON 1K 5% 1/2W | KLV-S40A10 | |
| 1724 | | G3 | RESISTOR | | R6839 | 1-240-251-11 | CEMENTED 6.8 5% 10W | KLV-S40A10 | |
| 1725 | | G3 | RESISTOR | | R6840 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | KLV-S40A10 | |
| 1726 | | G3 | VARIABLE RESISTOR | | RV6100 | 1-227-703-91 | RES, CERMET VAR 1K | KLV-S40A10 | |
| 1727 | | G3 | RELAY | | RY6002 | 1-755-418-12 | RELAY (AC POWER) | KLV-S40A10 | |
| 1728 | | G3 | RELAY | | RY6004 | 1-755-418-12 | RELAY (AC POWER) | KLV-S40A10 | |
| 1729 | | G3 | TRANSFORMER | | T6100 | 1-443-463-11 | CONVERTER TRANSFORMER (PIT) | KLV-S40A10 | |
| 1730 | | G3 | TRANSFORMER | | T6101 | 1-443-463-11 | CONVERTER TRANSFORMER (PIT) | KLV-S40A10 | |
| 1731 | | G3 | TRANSFORMER | | T6300 | 1-443-313-21 | TRANSFORMER, CONVERTER (SBT) | KLV-S40A10 | |
| 1732 | | G3 | TRANSFORMER | | T6700 | 1-443-819-11 | CONVERTER TRANSFORMER (PIT) | KLV-S40A10 | |
| 1733 | | G3 | THERMISTOR | | TH6300 | 1-803-586-11 | THERMISTOR, NTC | KLV-S40A10 | |
| 1734 | | G3 | THERMISTOR | | TH6420 | 1-809-789-71 | THERMISTOR, POSITIVE | KLV-S40A10 | |
| 1735 | | G3 | VARISTOR | | VD6001 | 1-805-479-21 | VARISTOR | KLV-S40A10 | |
| 1736 | | G3 | VARISTOR | | VD6002 | 1-805-479-21 | VARISTOR | KLV-S40A10 | |

SERVICE MANUAL

FOR BOARD REPAIR CENTER

WAX CHASSIS

KLV-S26A10

KLV-S32A10

US Model

Canadian Model

KLV-S32A10

Taiwan Model

KLV-S40A10

Canadian Model

Mexican Model


This document describes the schematic diagrams and printed wiring boards and electrical parts list of board replacement service target boards only.


See the main Service Manual for other boards.

TABLE OF CONTENTS


| | |
|--|-----------|
| 1. B BOARD | 3 |
| 1-1. Schematic Diagrams (KLV-S26/S32A10 ONLY) | 3 |
| B (1/6) Board..... | 3 |
| B (2/6) Board..... | 4 |
| B (3/6) Board..... | 5 |
| B (4/6) Board..... | 6 |
| B (5/6) Board..... | 7 |
| B (6/6) Board..... | 8 |
| 1-2. Schematic Diagrams (KLV-S40A10 ONLY) | 9 |
| B (1/7) Board..... | 9 |
| B (2/7) Board..... | 10 |
| B (3/7) Board..... | 11 |
| B (4/7) Board..... | 12 |
| B (5/7) Board..... | 13 |
| B (6/7) Board..... | 14 |
| B (7/7) Board..... | 15 |
| 1-3. Printed Wiring Boards | |
| (MAP drawing, silkless boards) | 16 |
| B Board (A side) | 16 |
| B Board (B side) | 17 |
| 2. P BOARD | 18 |
| 2-1. Schematic Diagram (KLV-S26/S32A10 ONLY) | 18 |
| P Board | 18 |
| 2-2. Schematic Diagram (KLV-S40A10 ONLY) | 19 |
| P Board | 19 |
| 2-3. Printed Wiring Boards | |
| (KLV-S26/S32A10 ONLY) | 20 |
| P Board (A side) | 20 |
| P Board (B side) | 20 |
| 2-4. Printed Wiring Boards (KLV-S40A10 ONLY) | 21 |
| P Board (A side) | 21 |
| P Board (B side) | 21 |
| 3. ELECTRICAL PARTS LIST | 22 |


B (1/6) Board

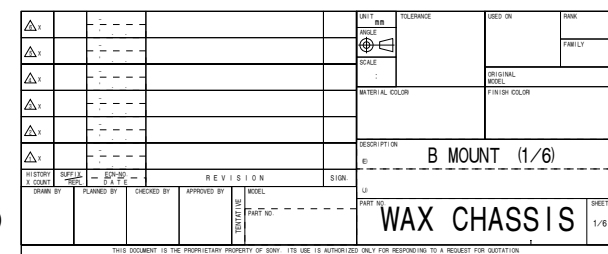

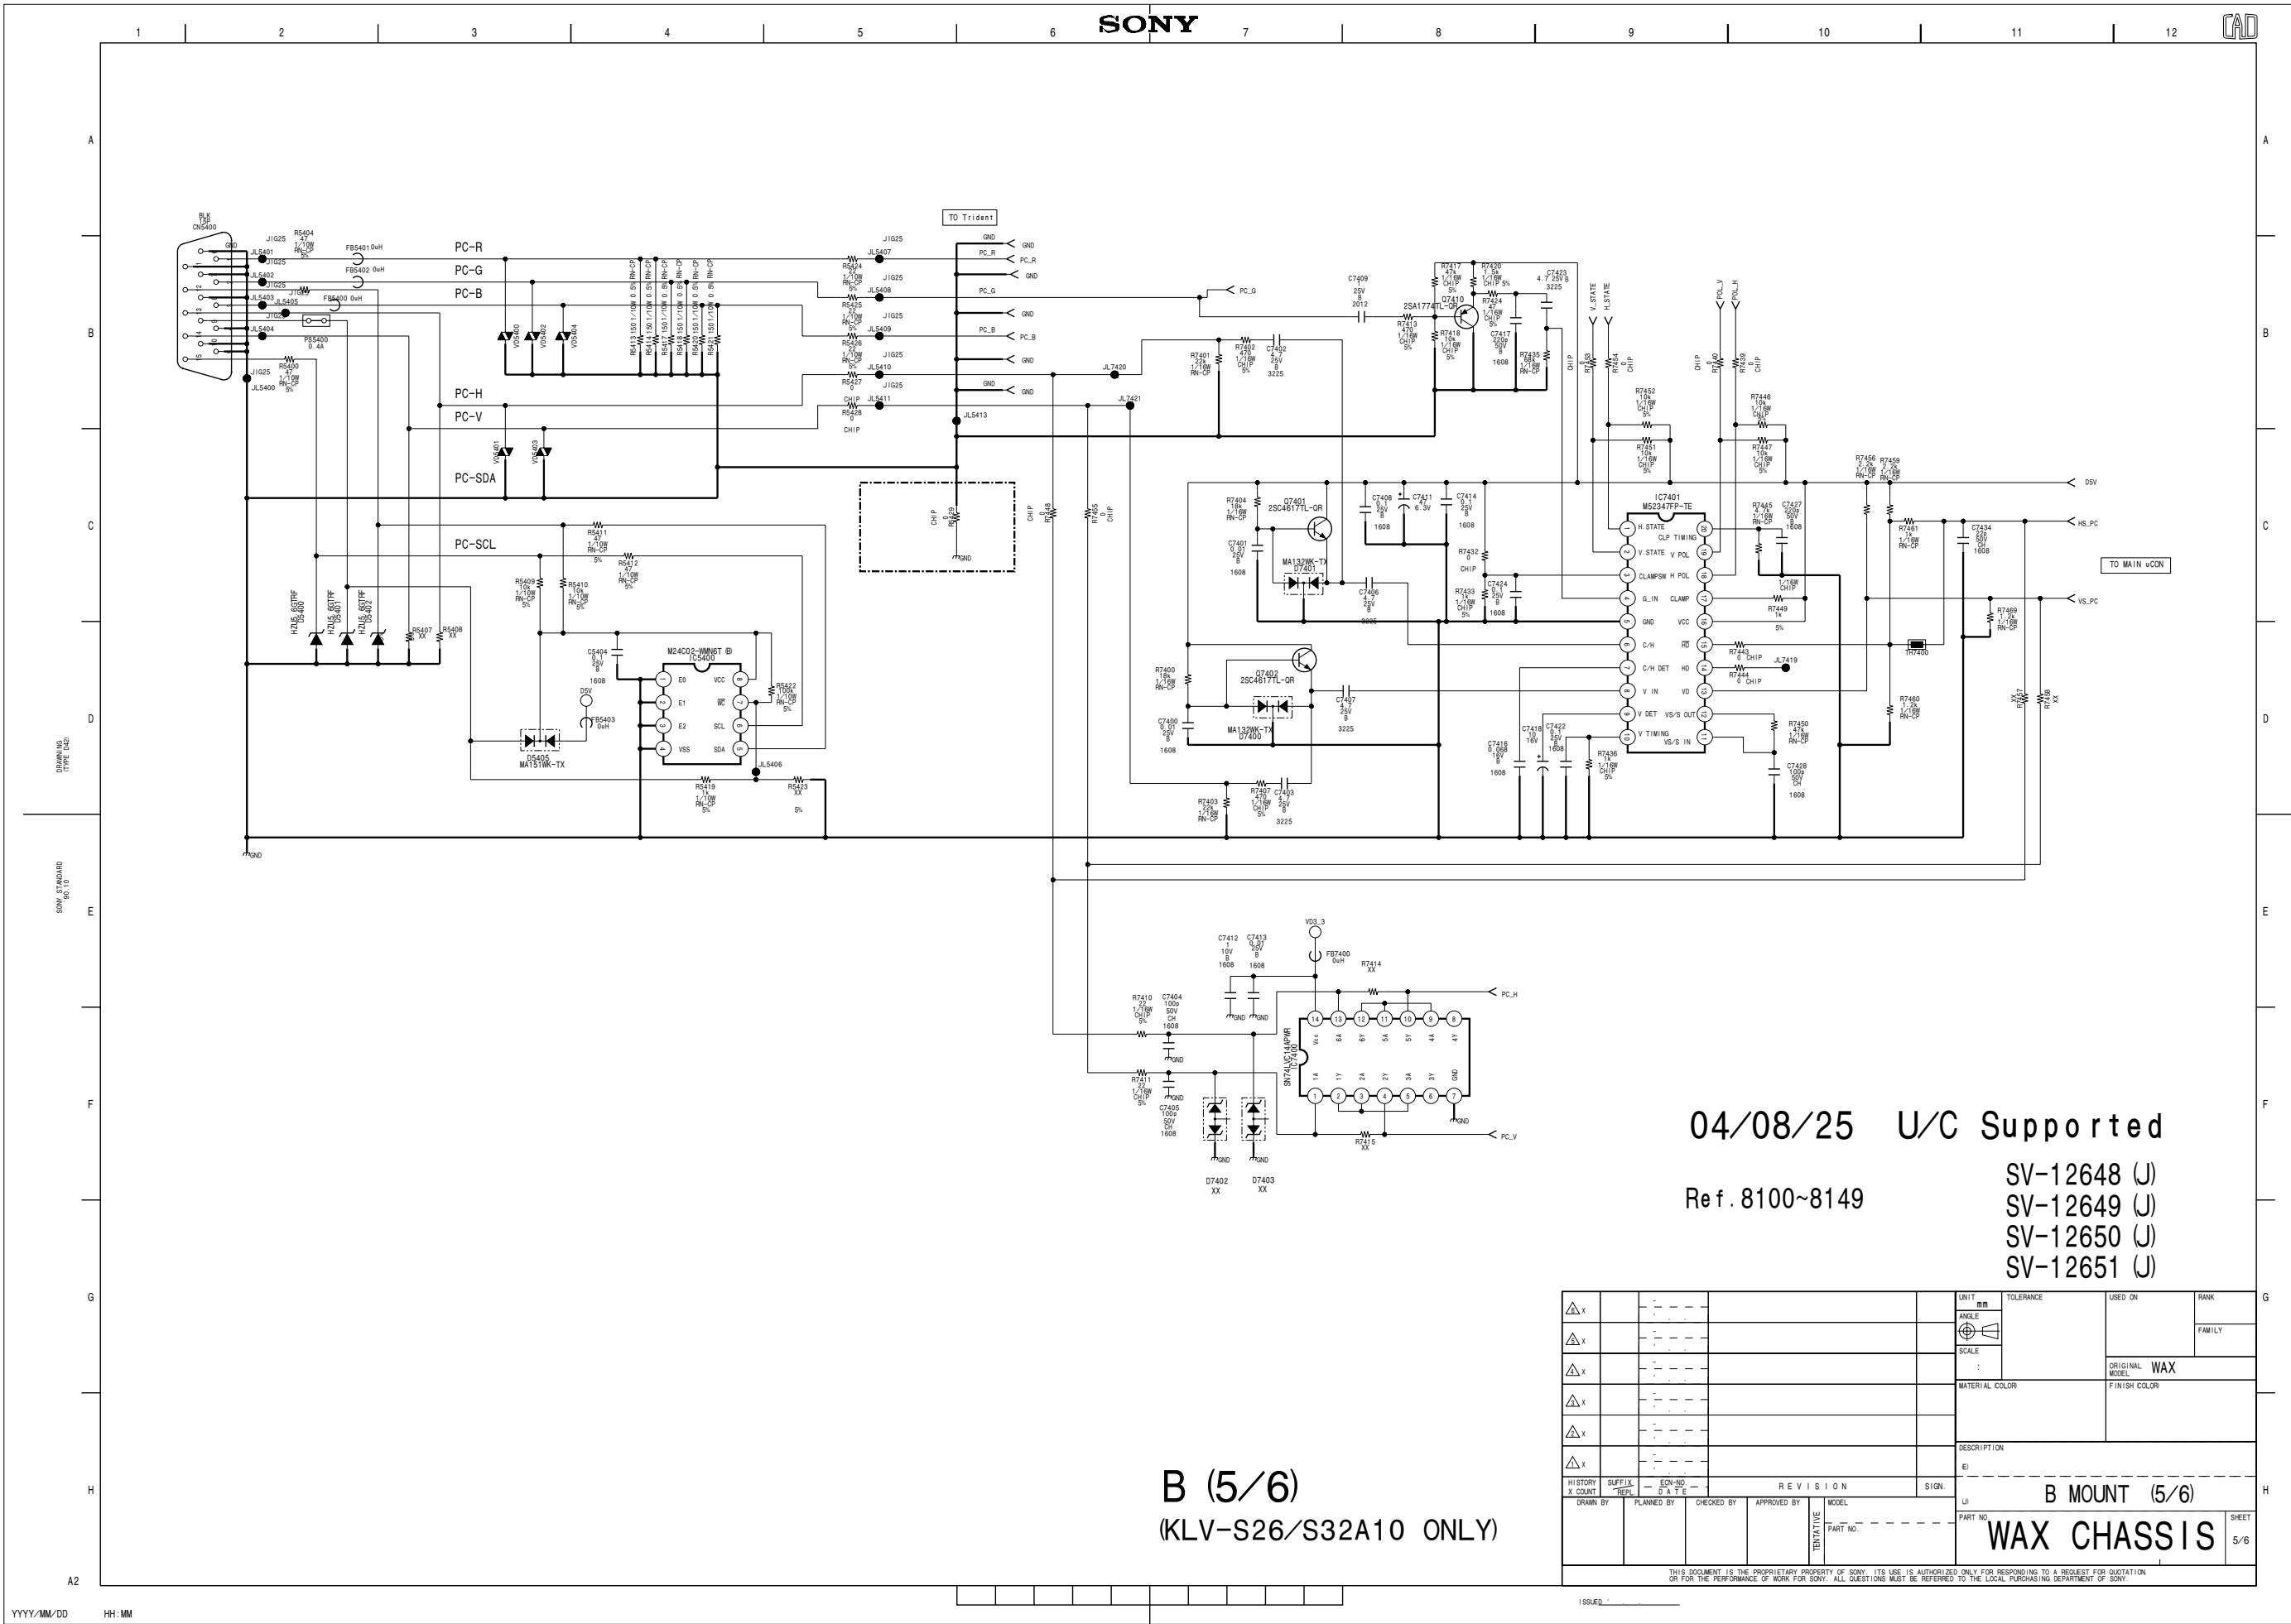



1-2. Schematic Diagrams (KLV-S40A10 ONLY) B (1/7) Board

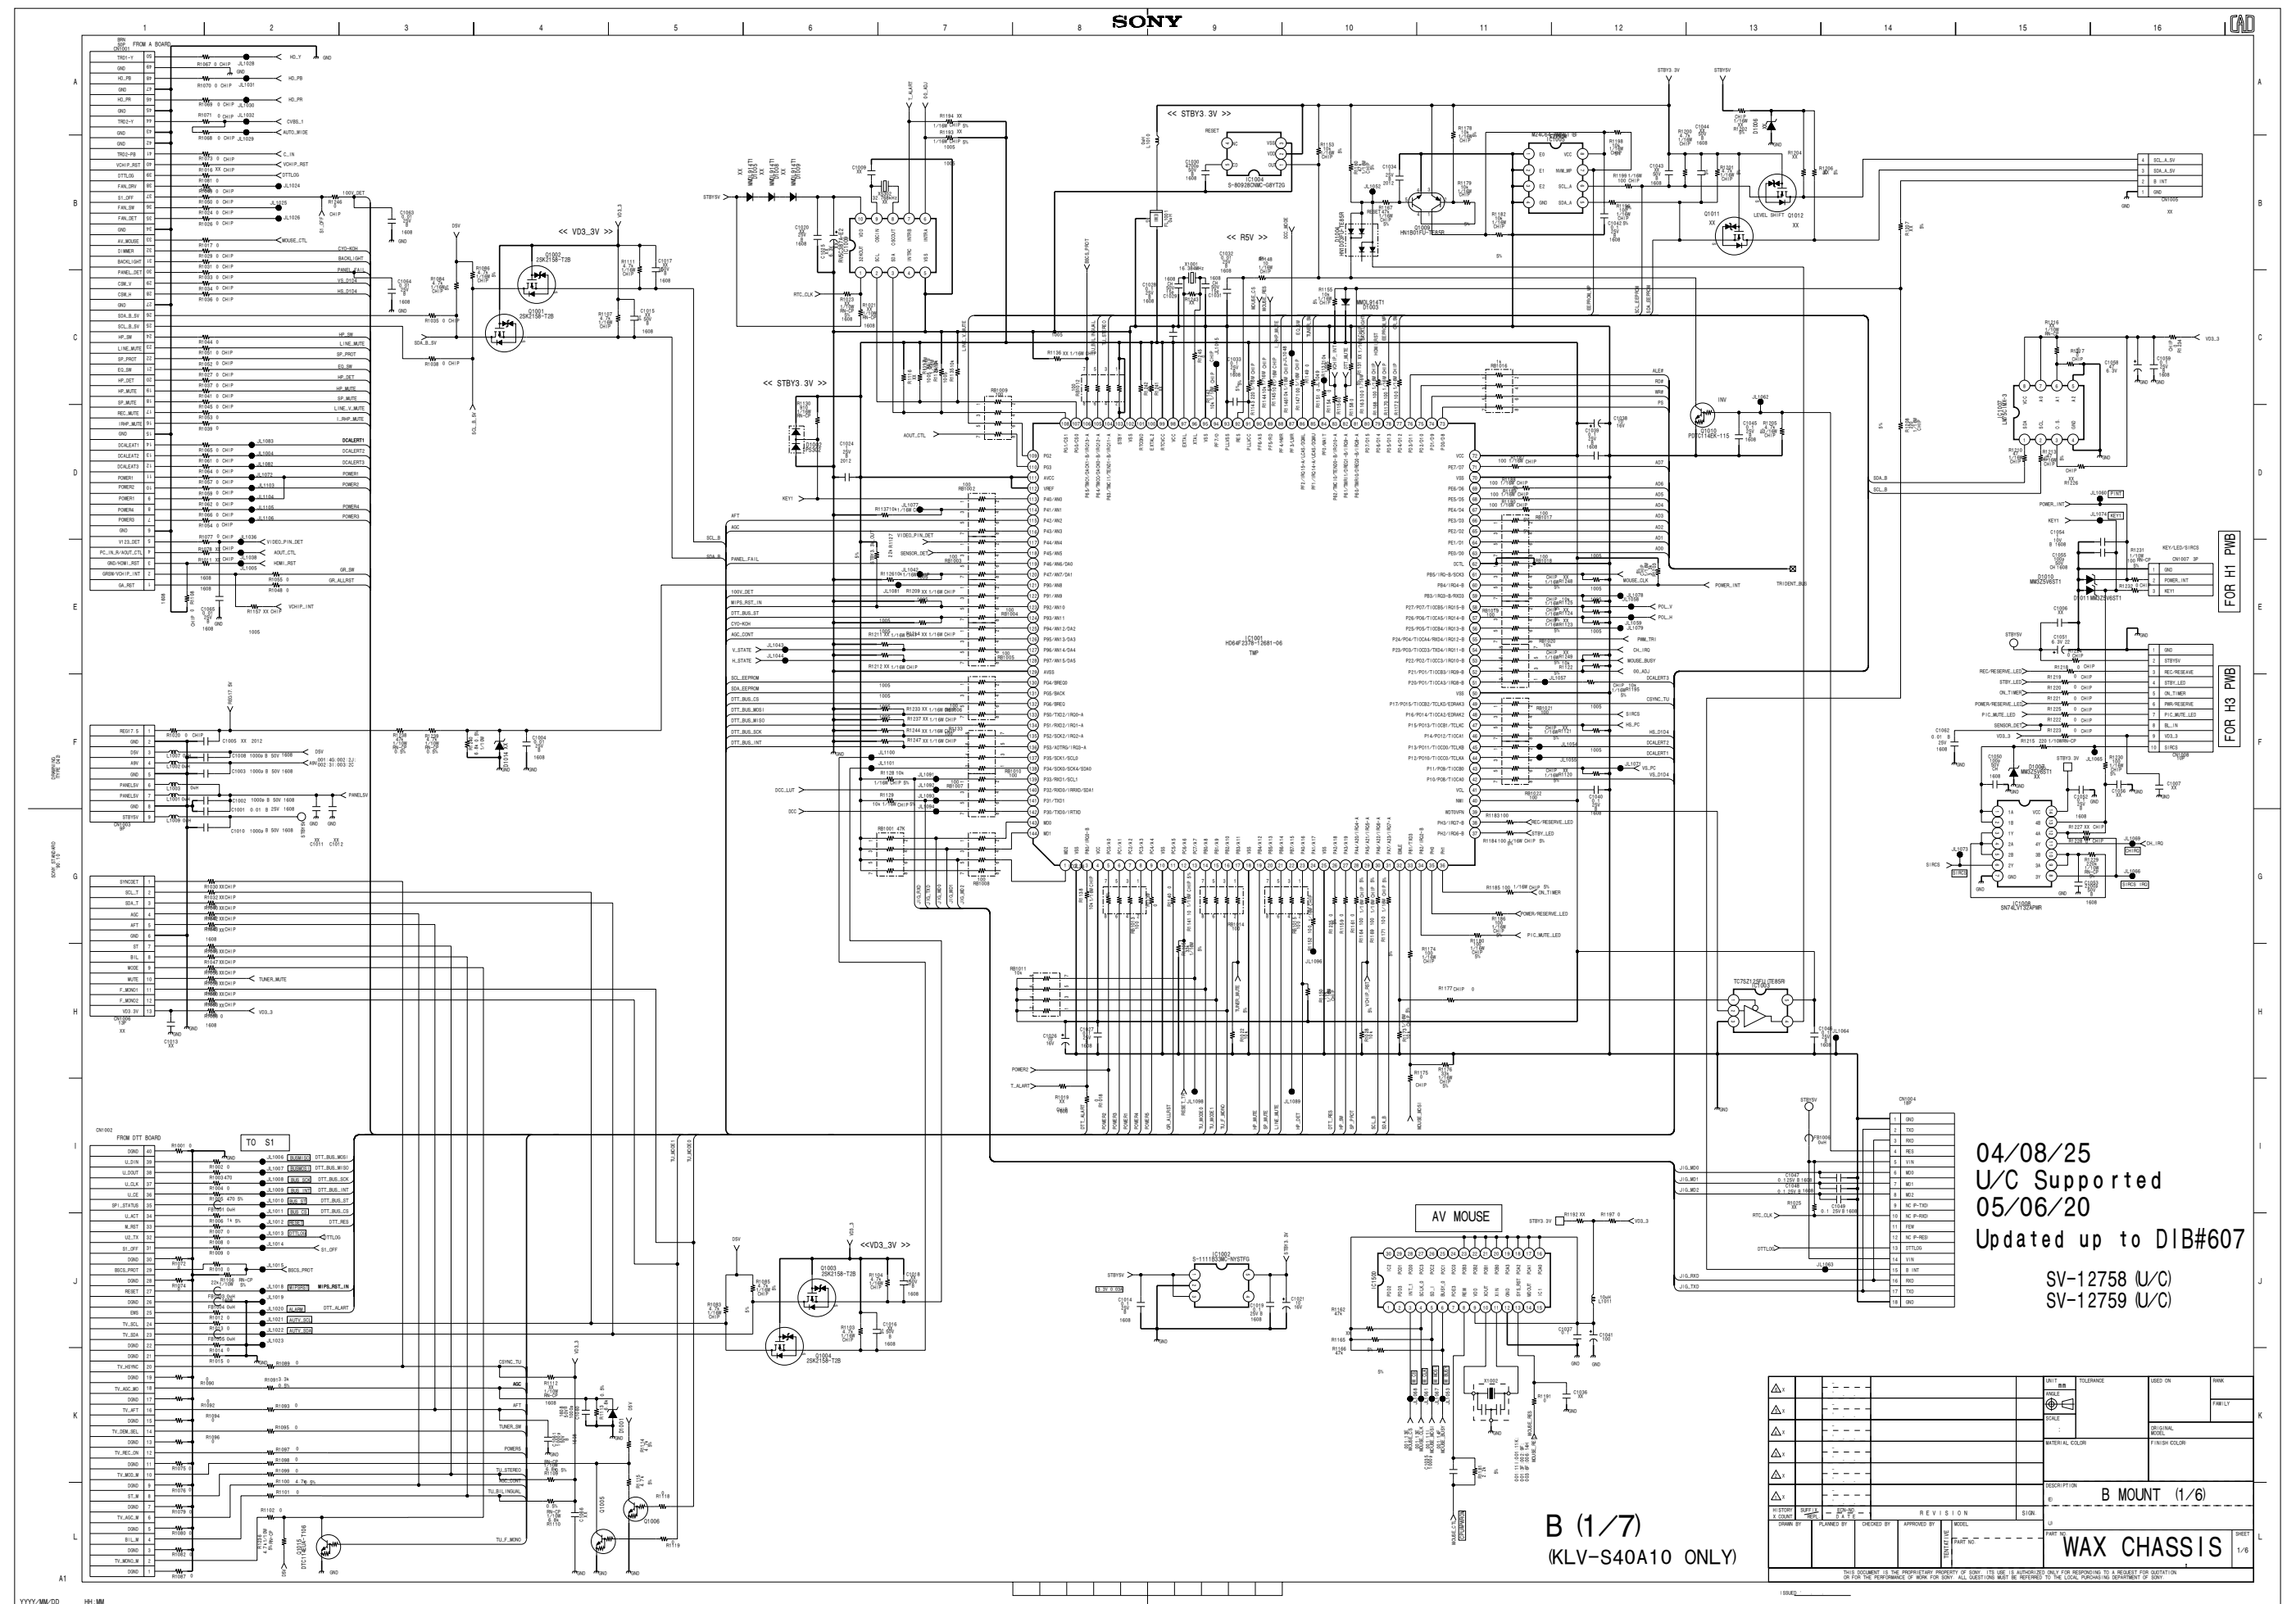


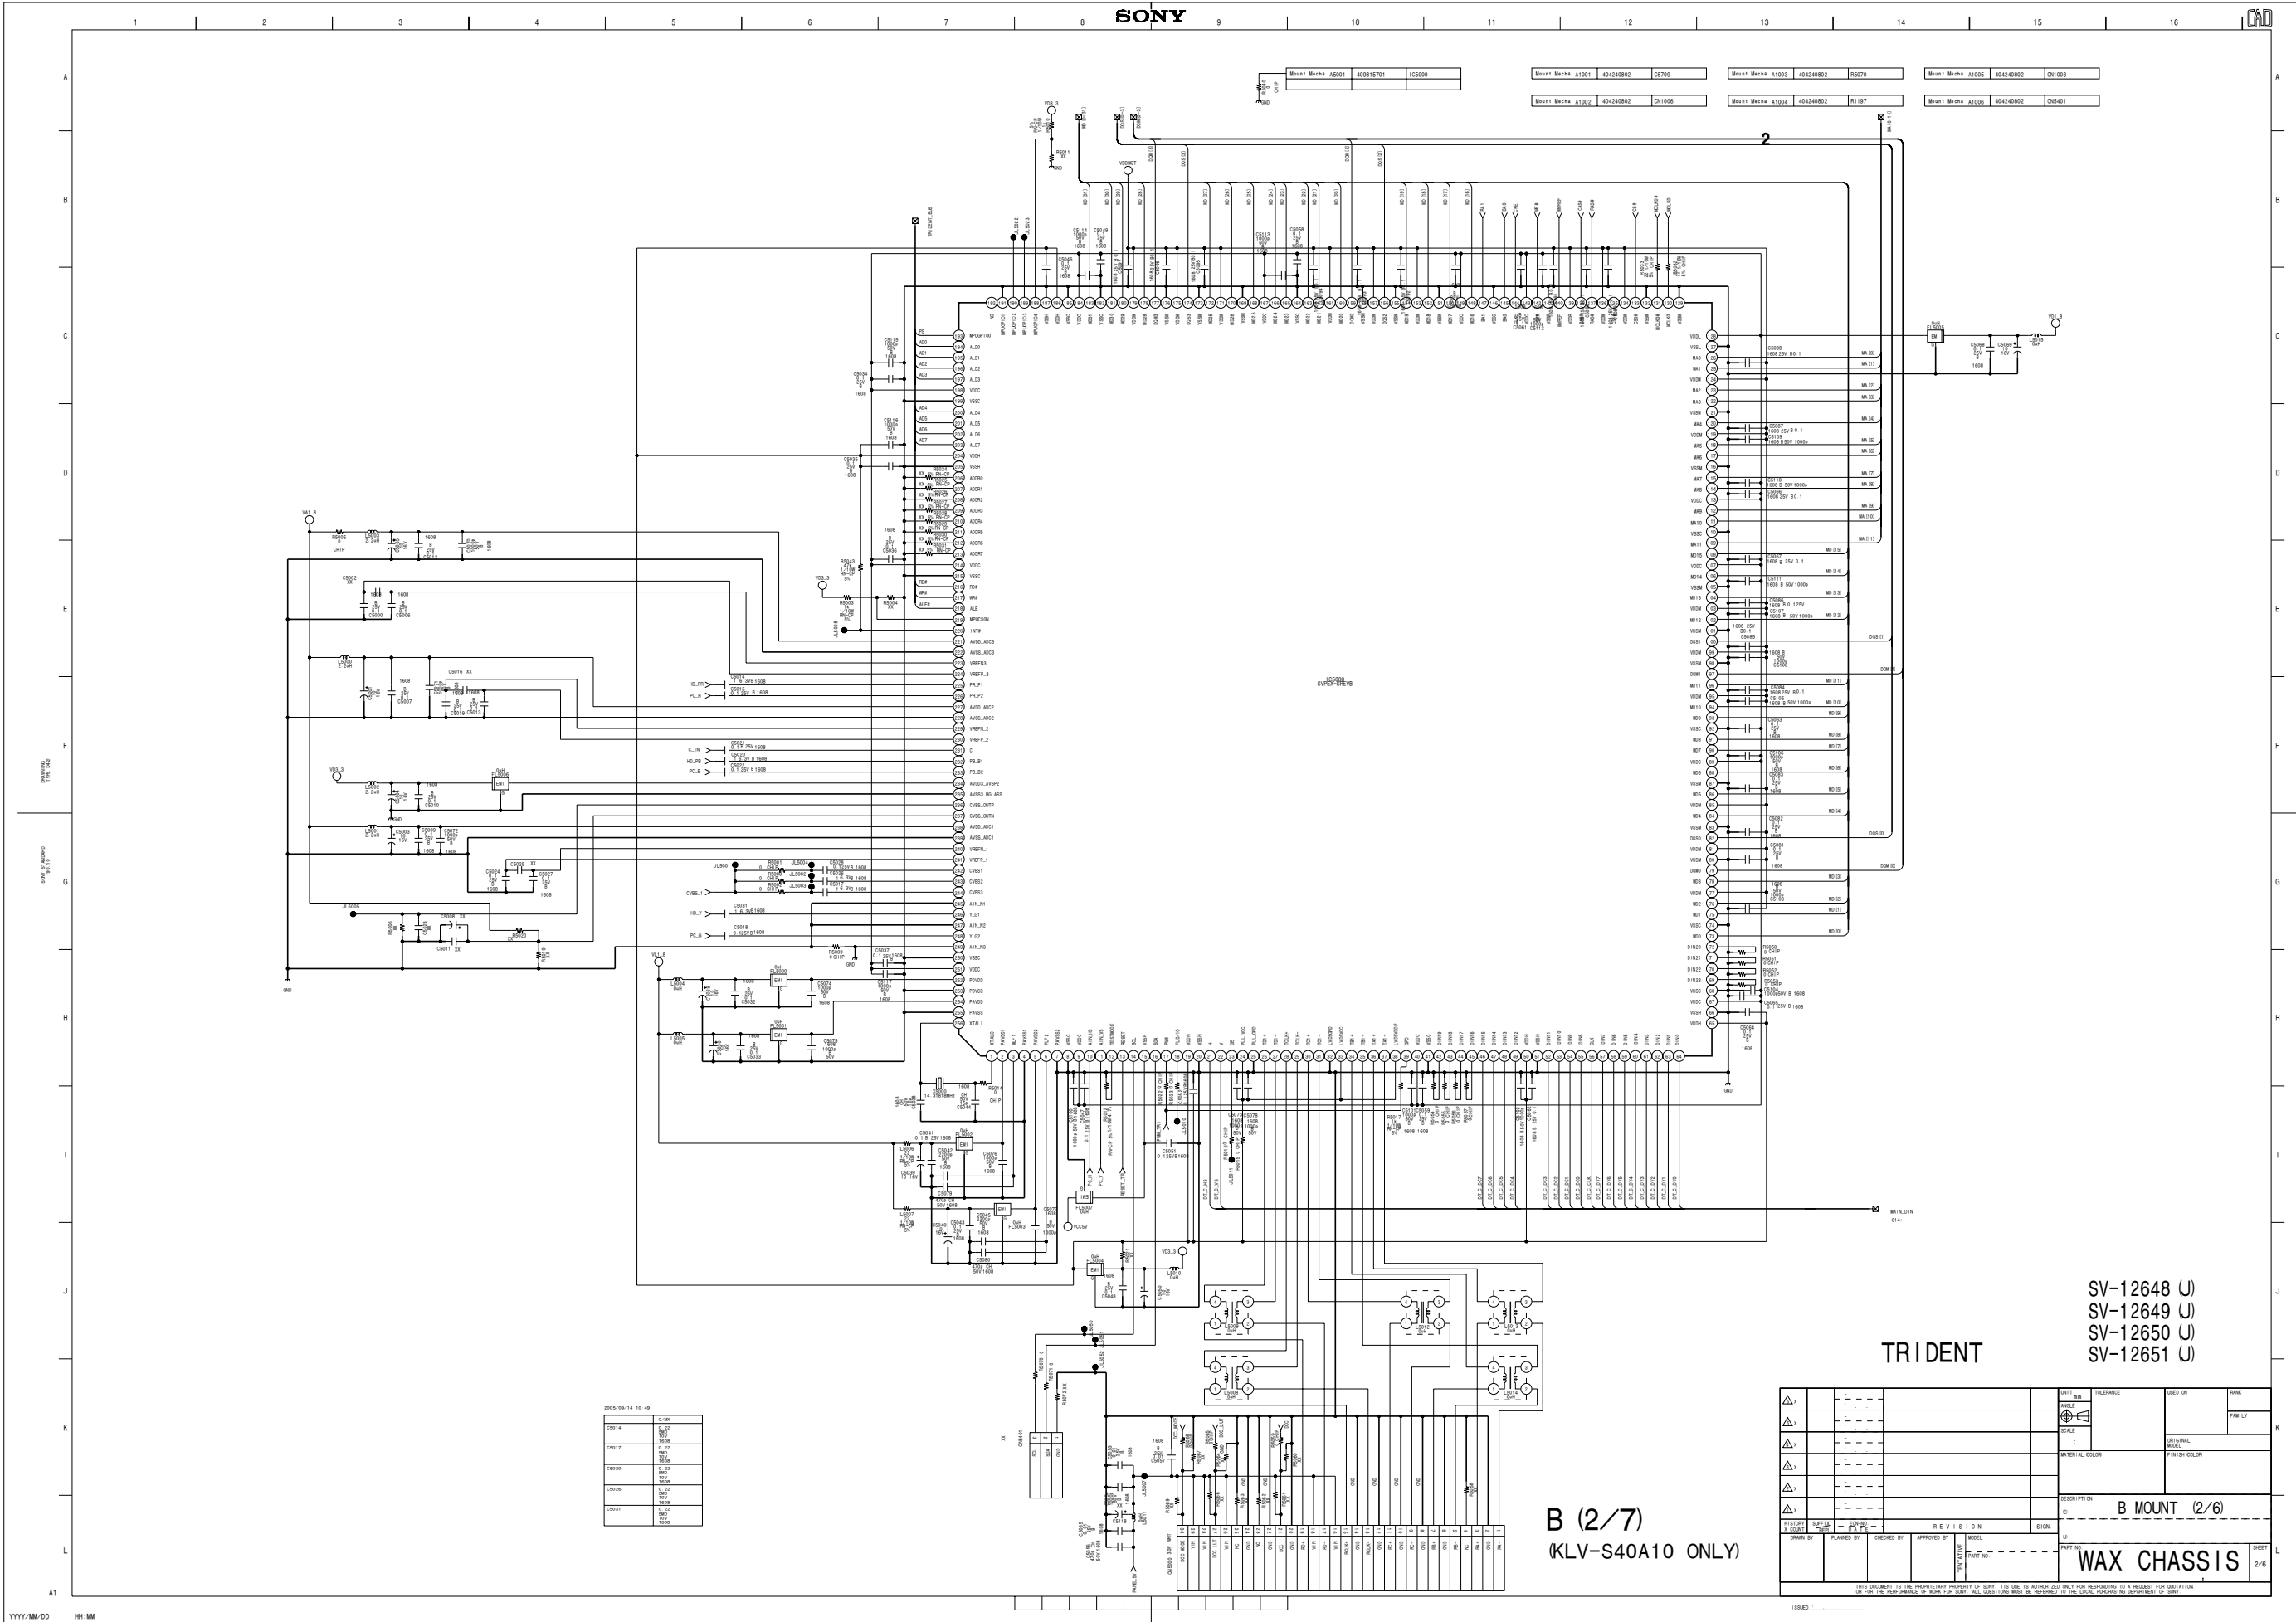

B (3/7) Board

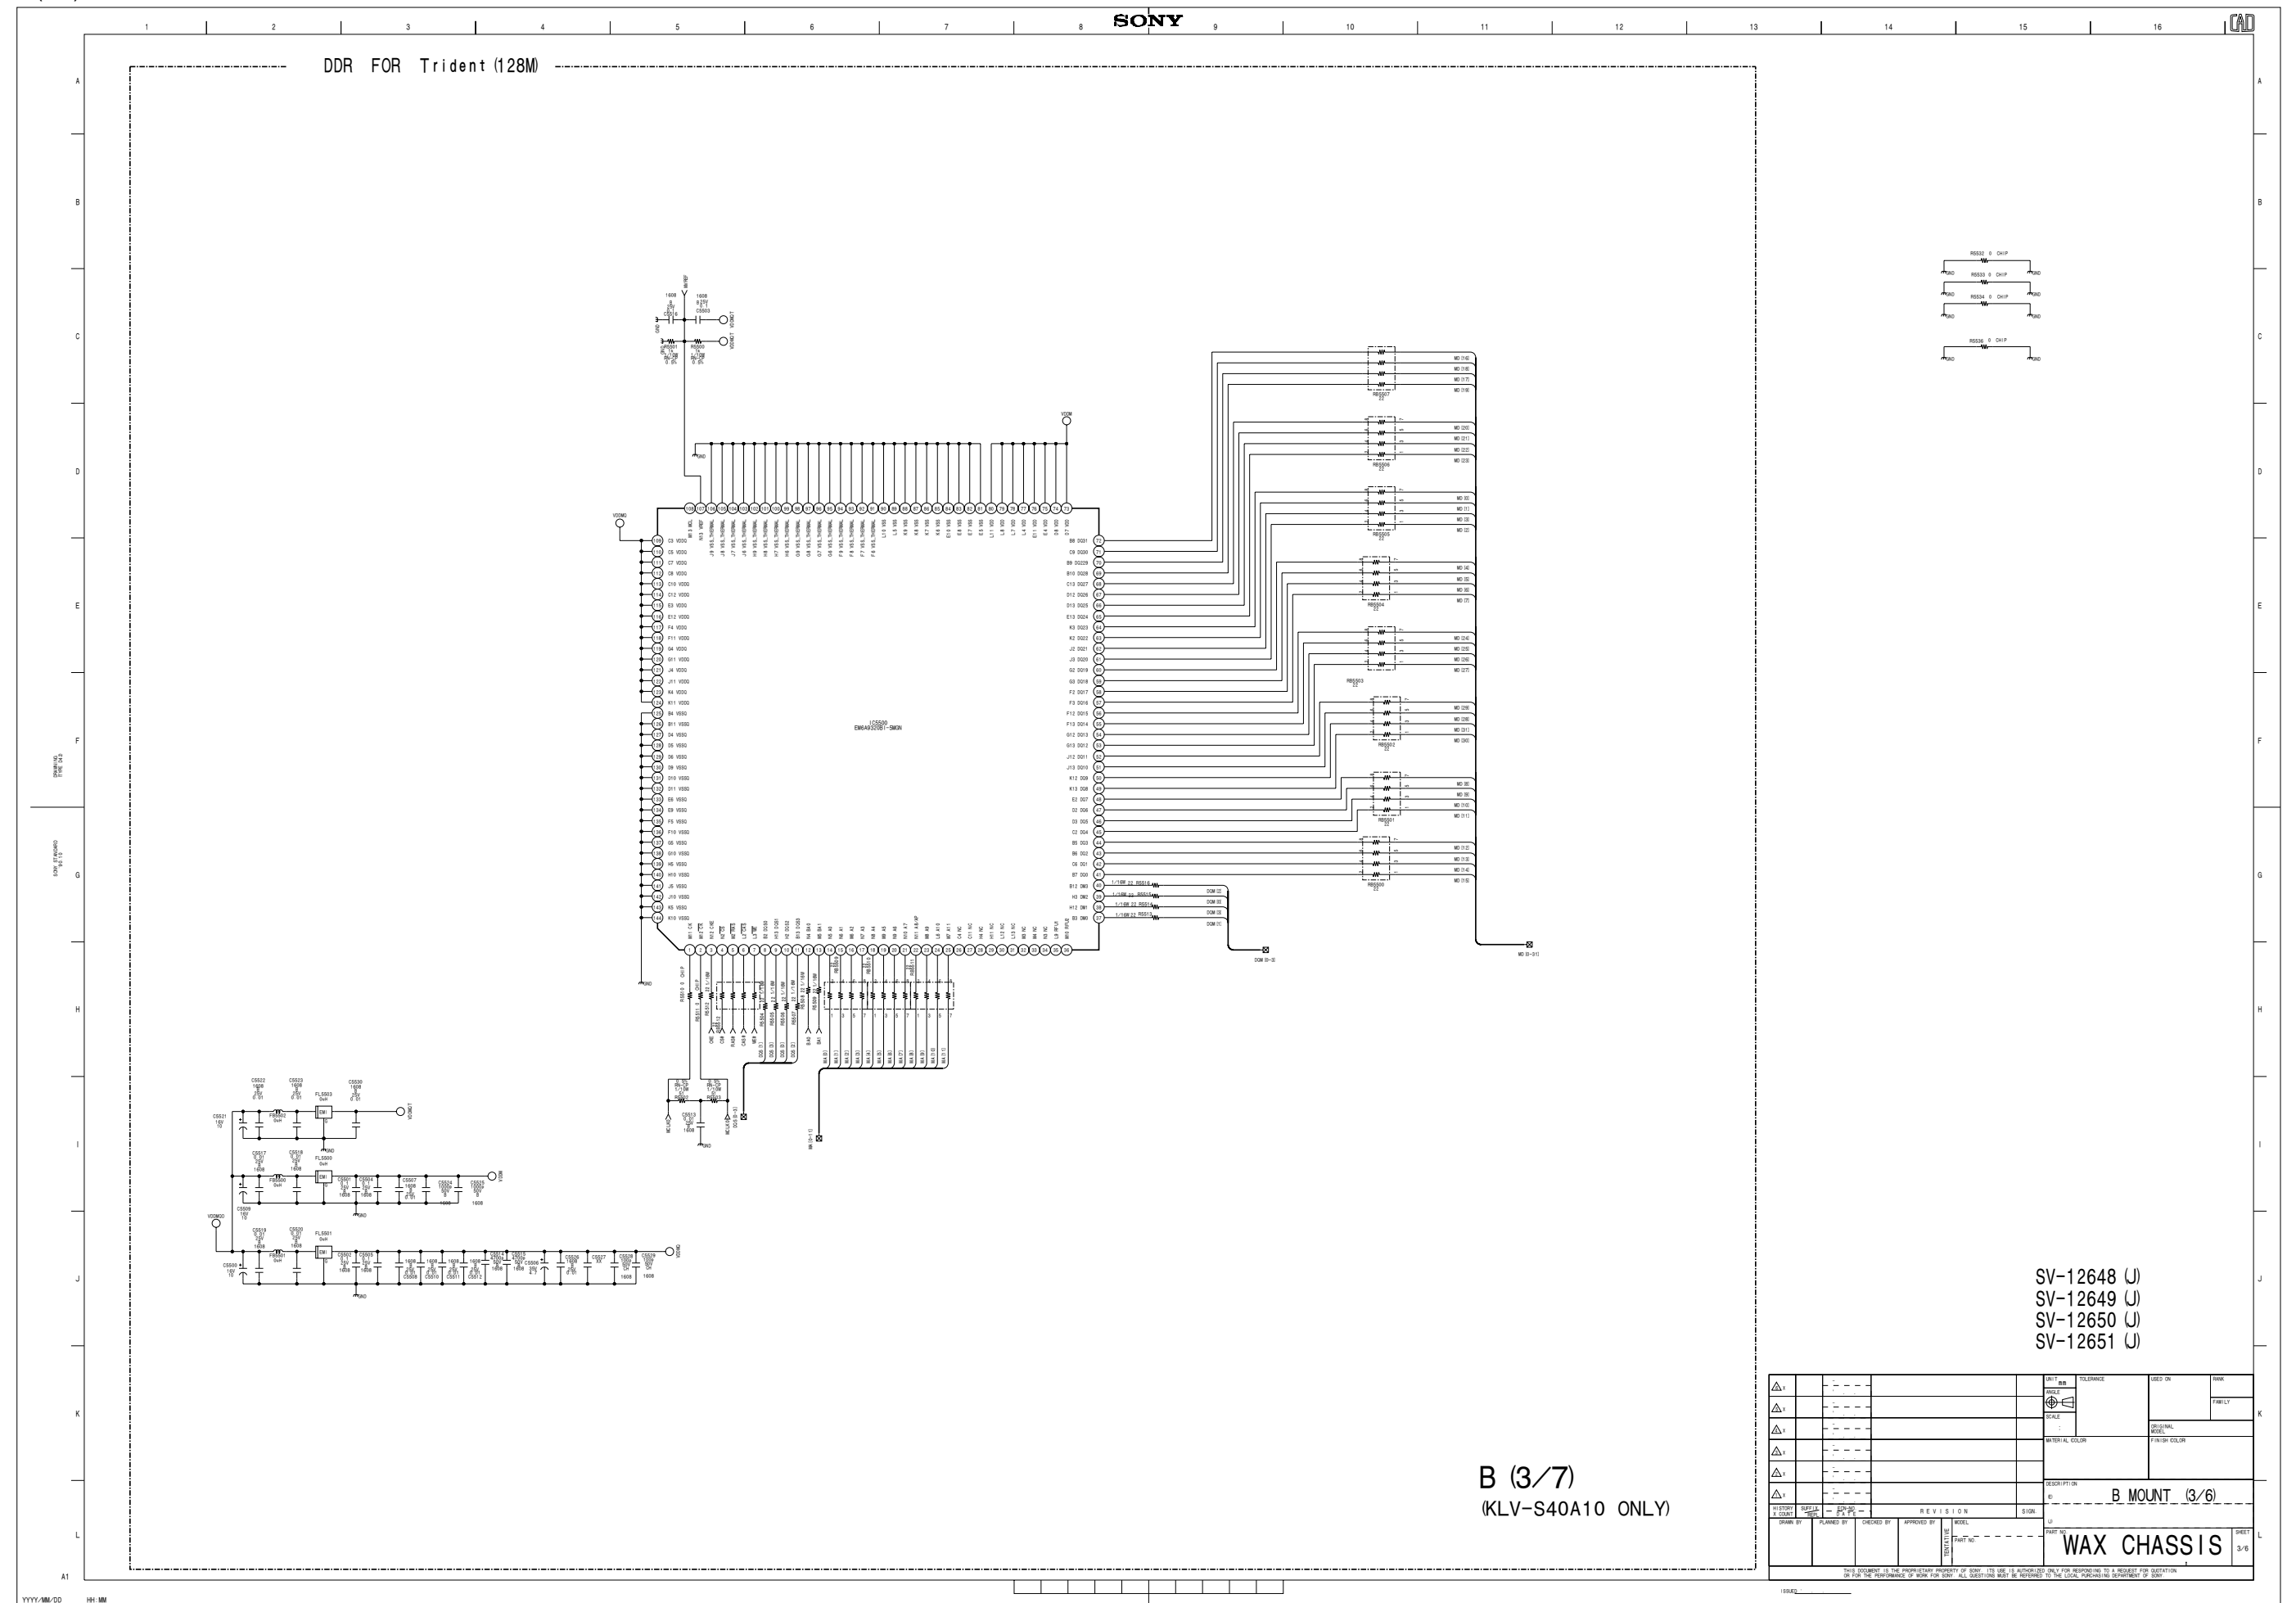


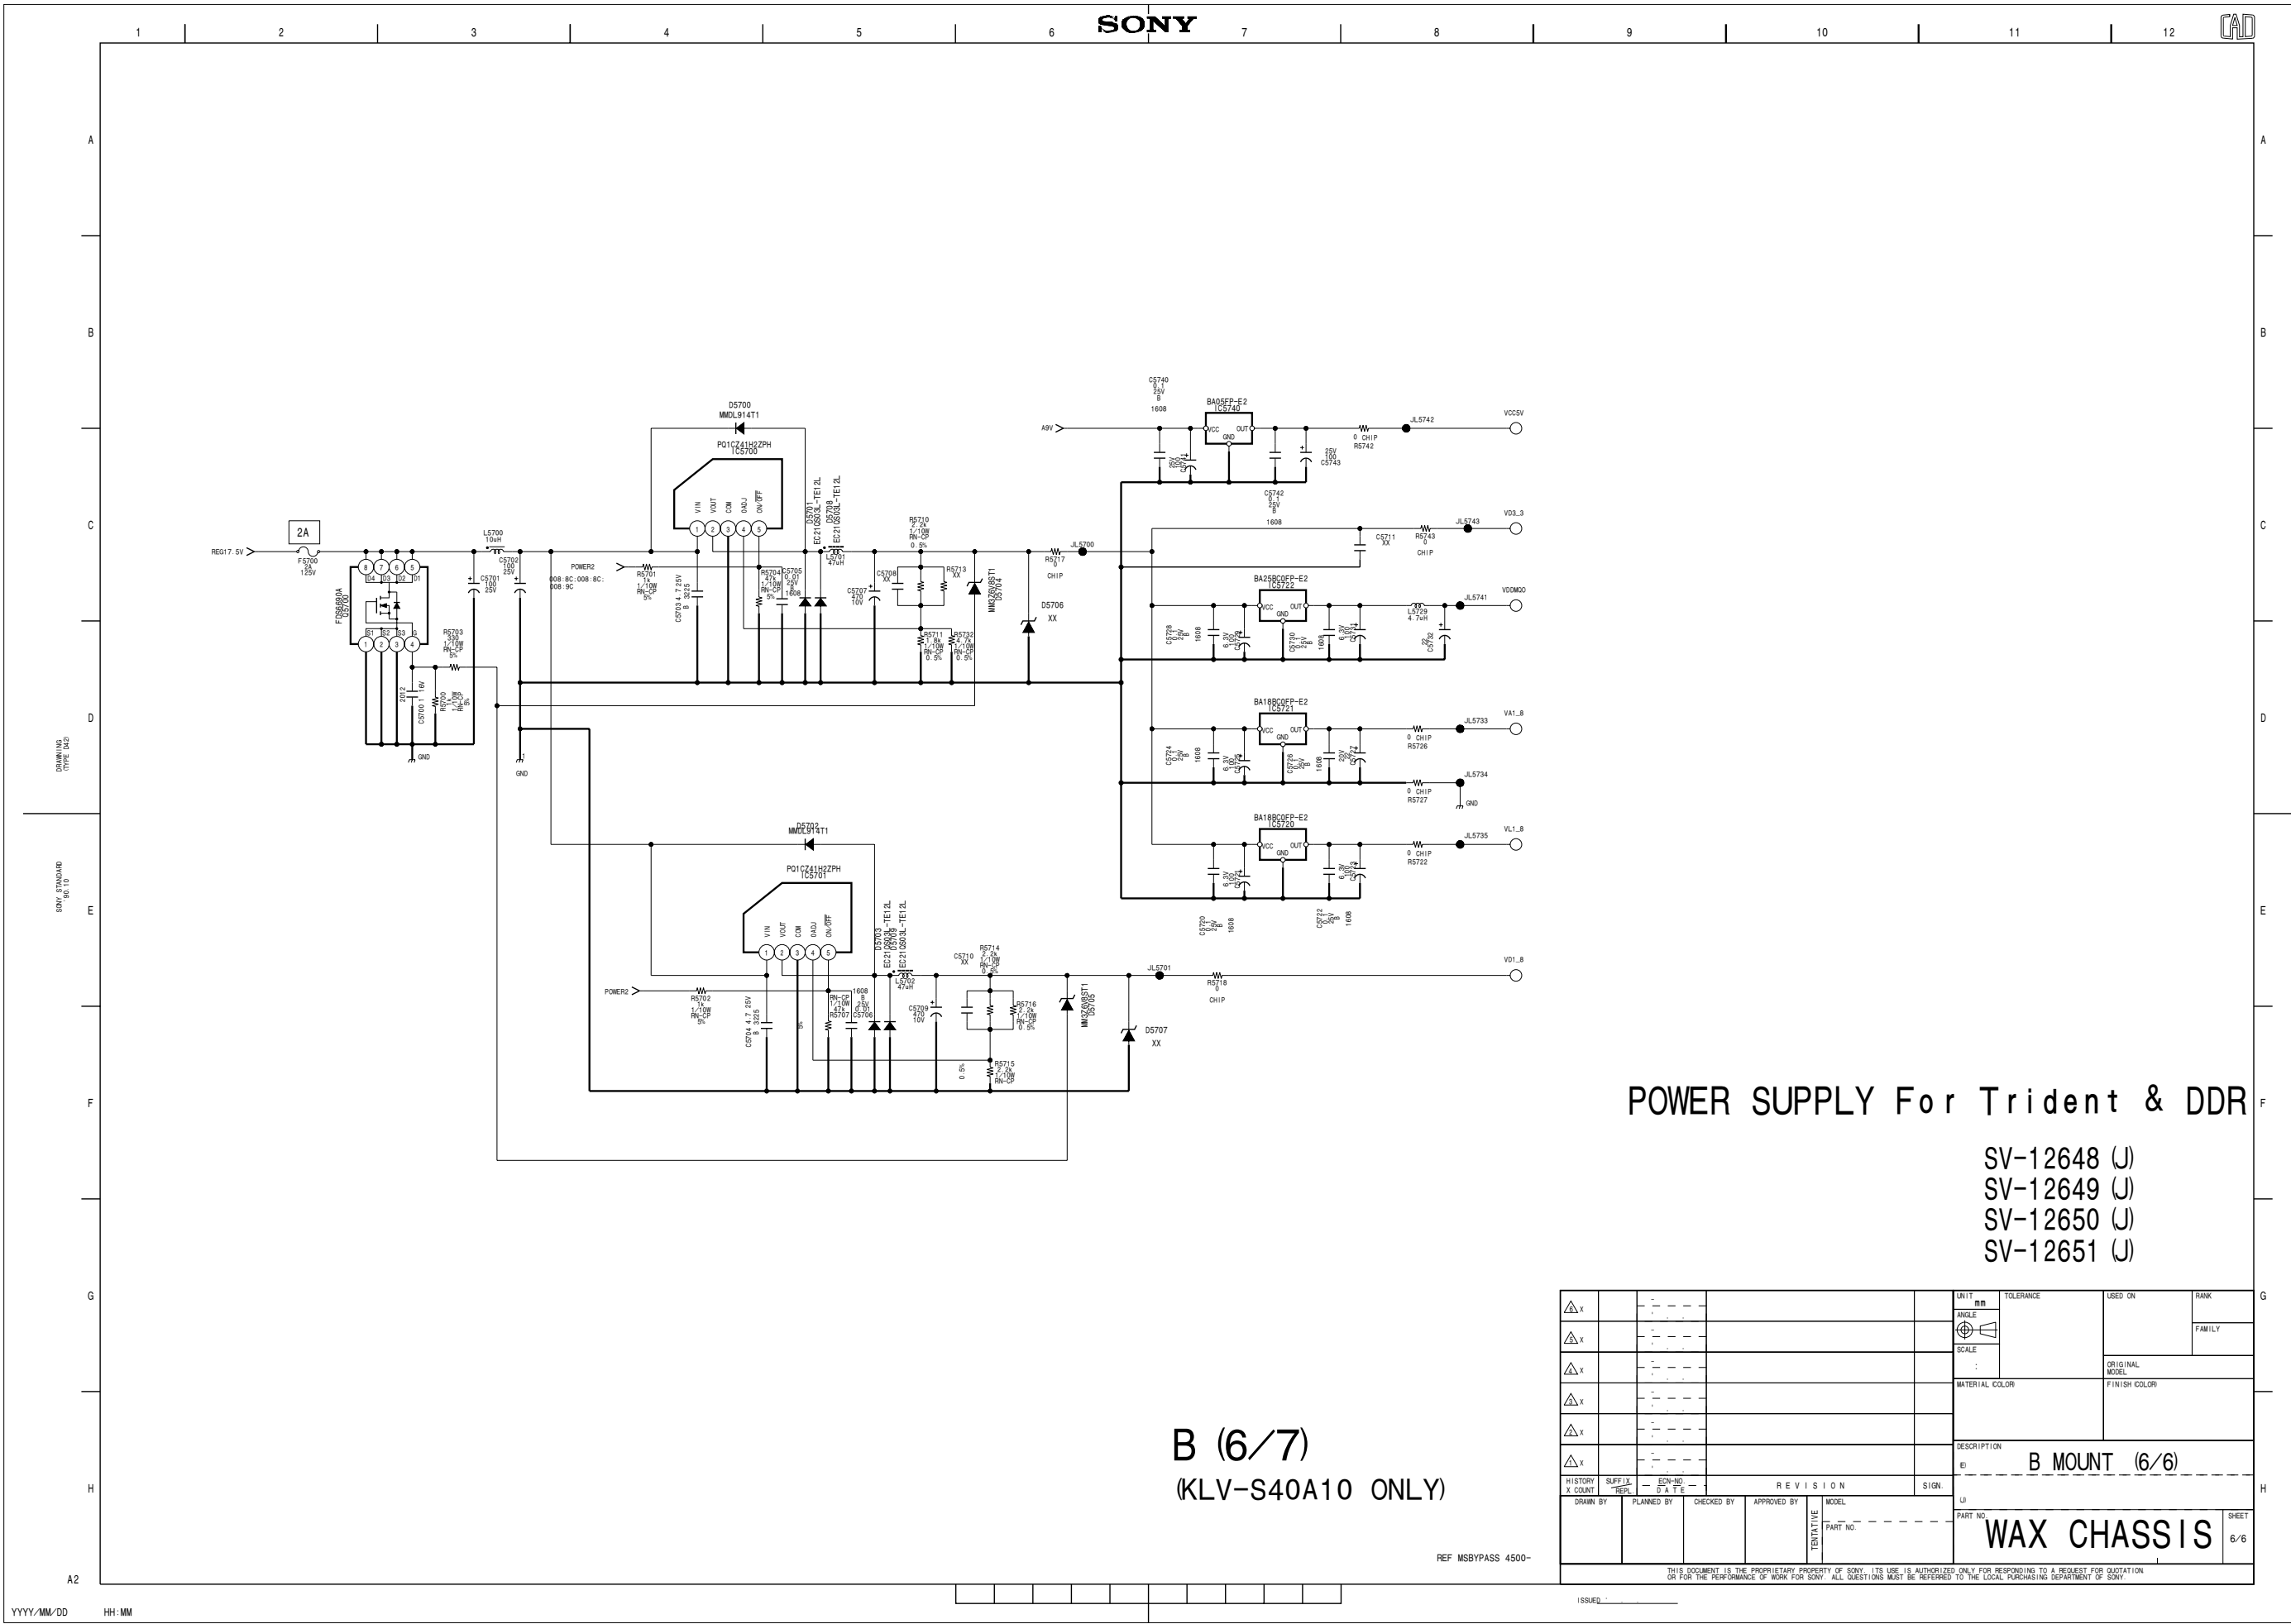

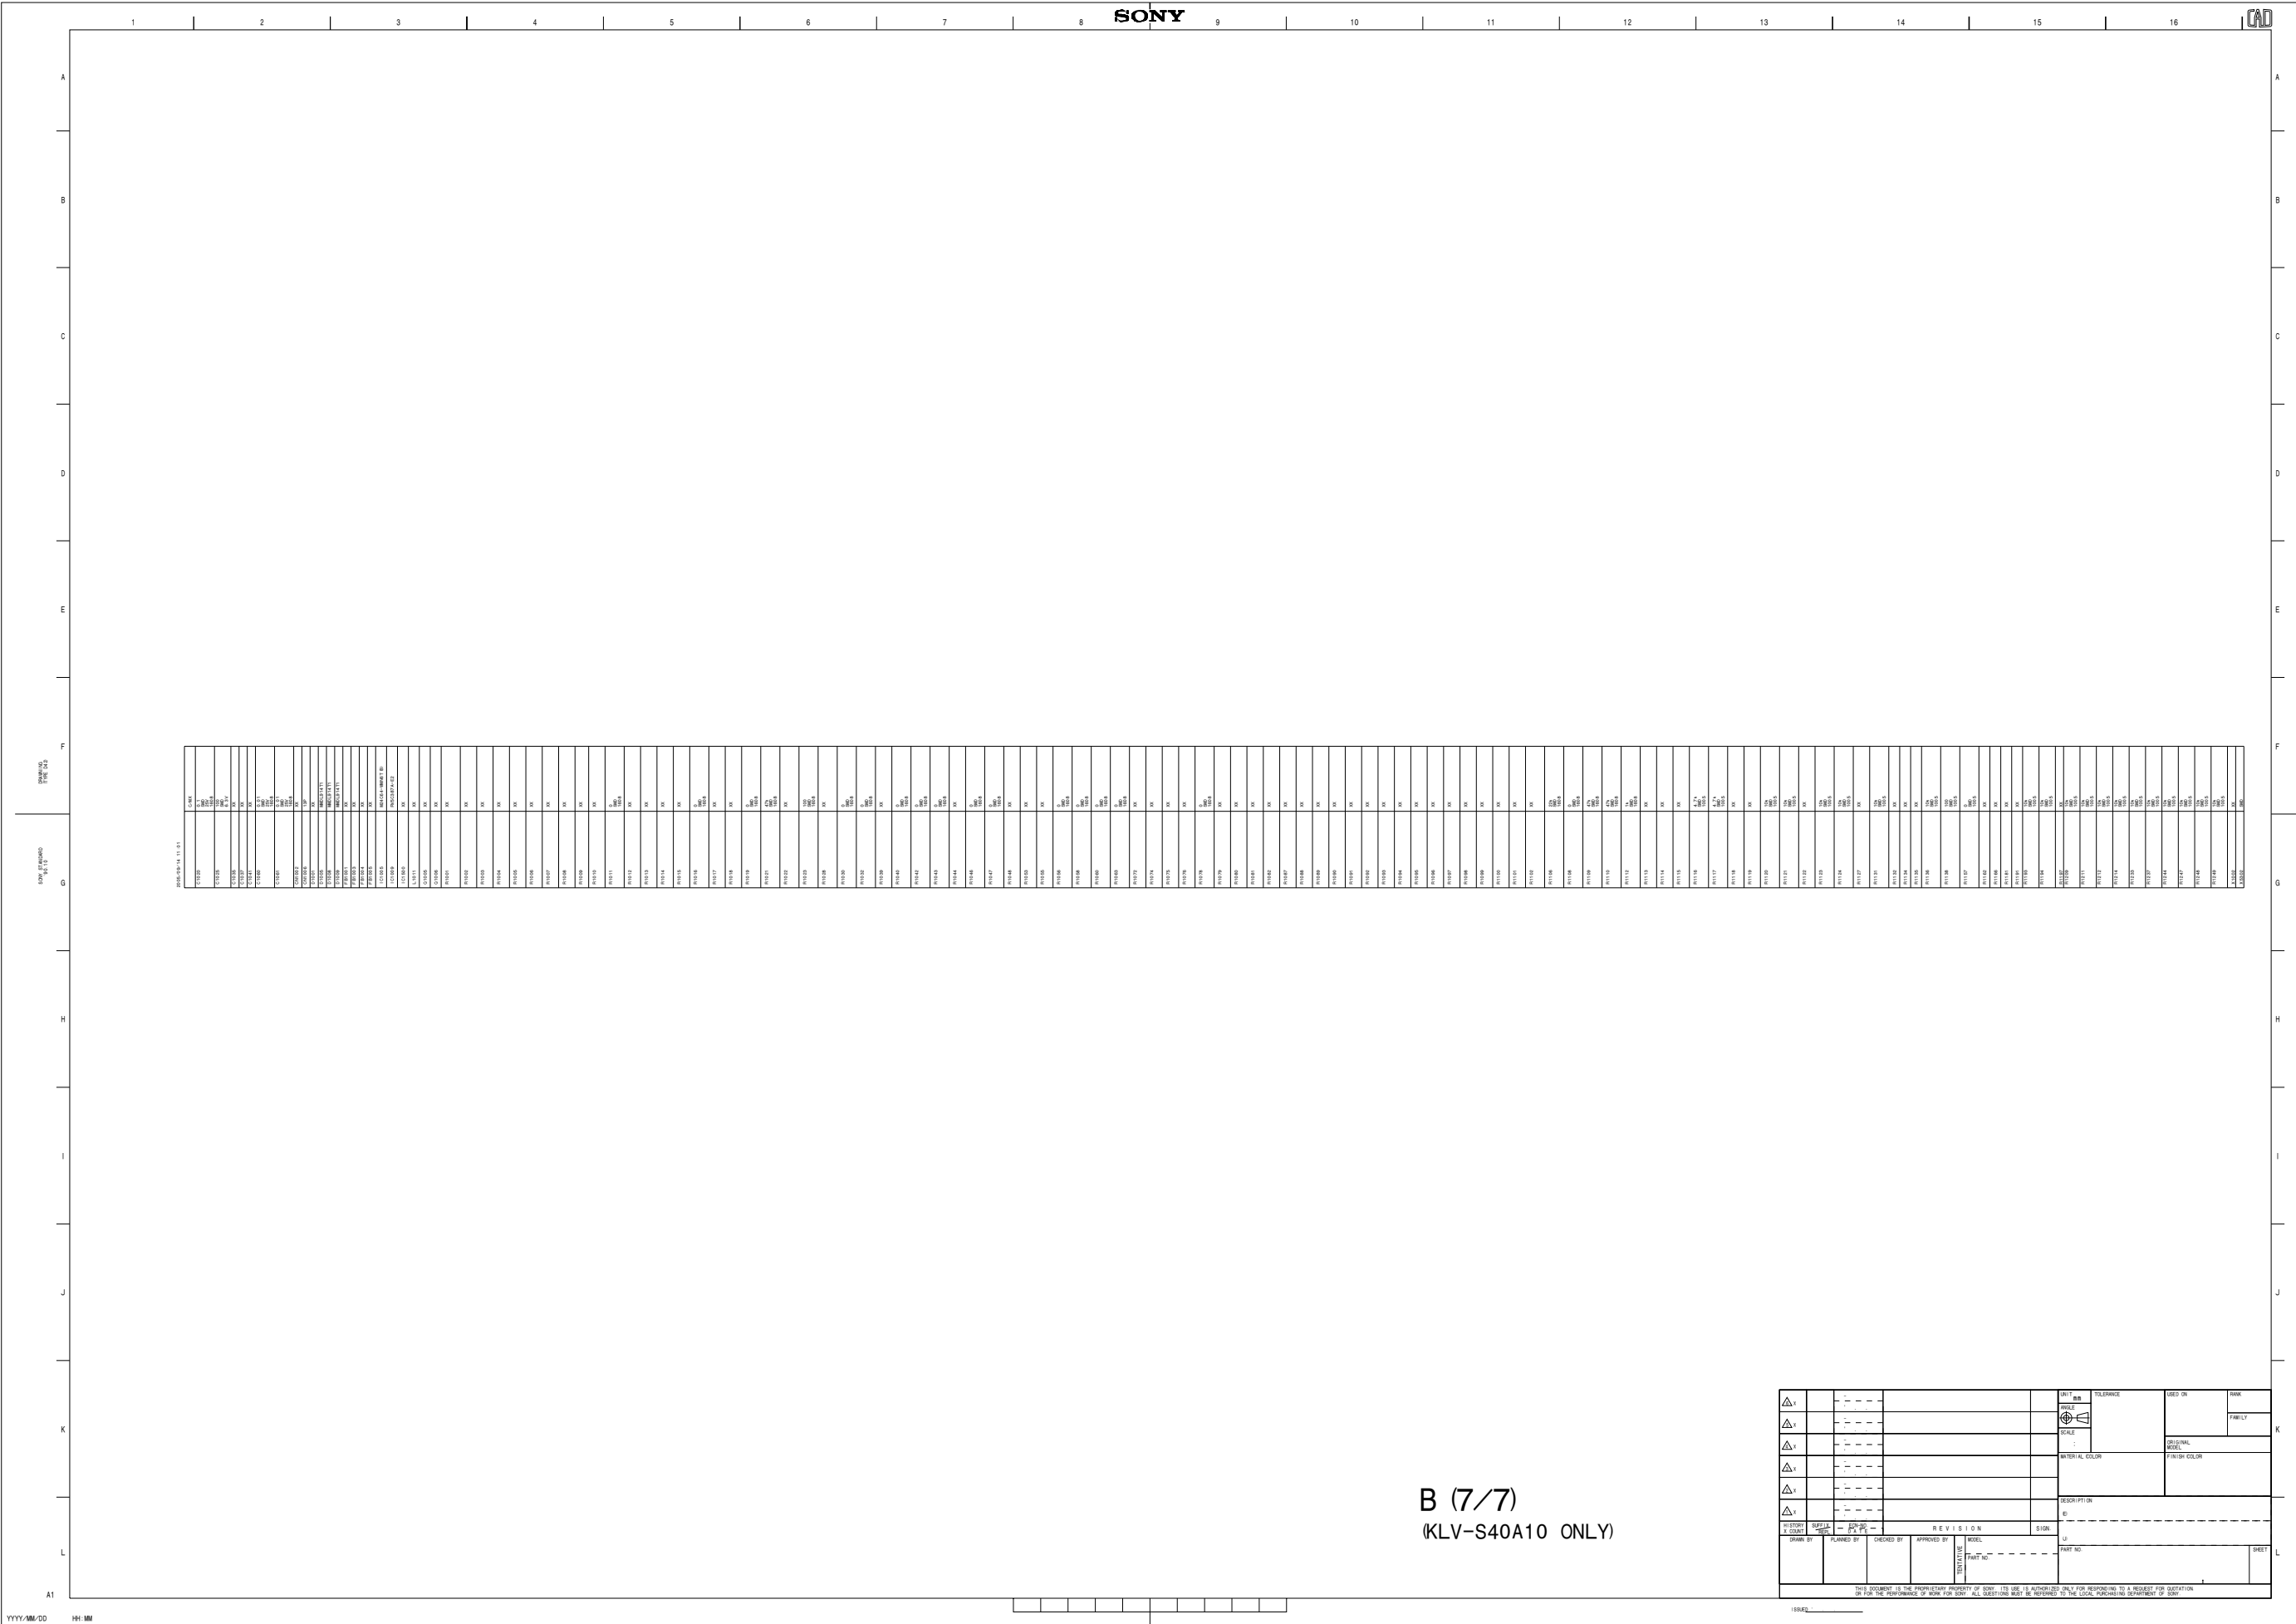


1-3. Printed Wiring Boards (MAP drawing, silkless boards)


B BOARD (A)

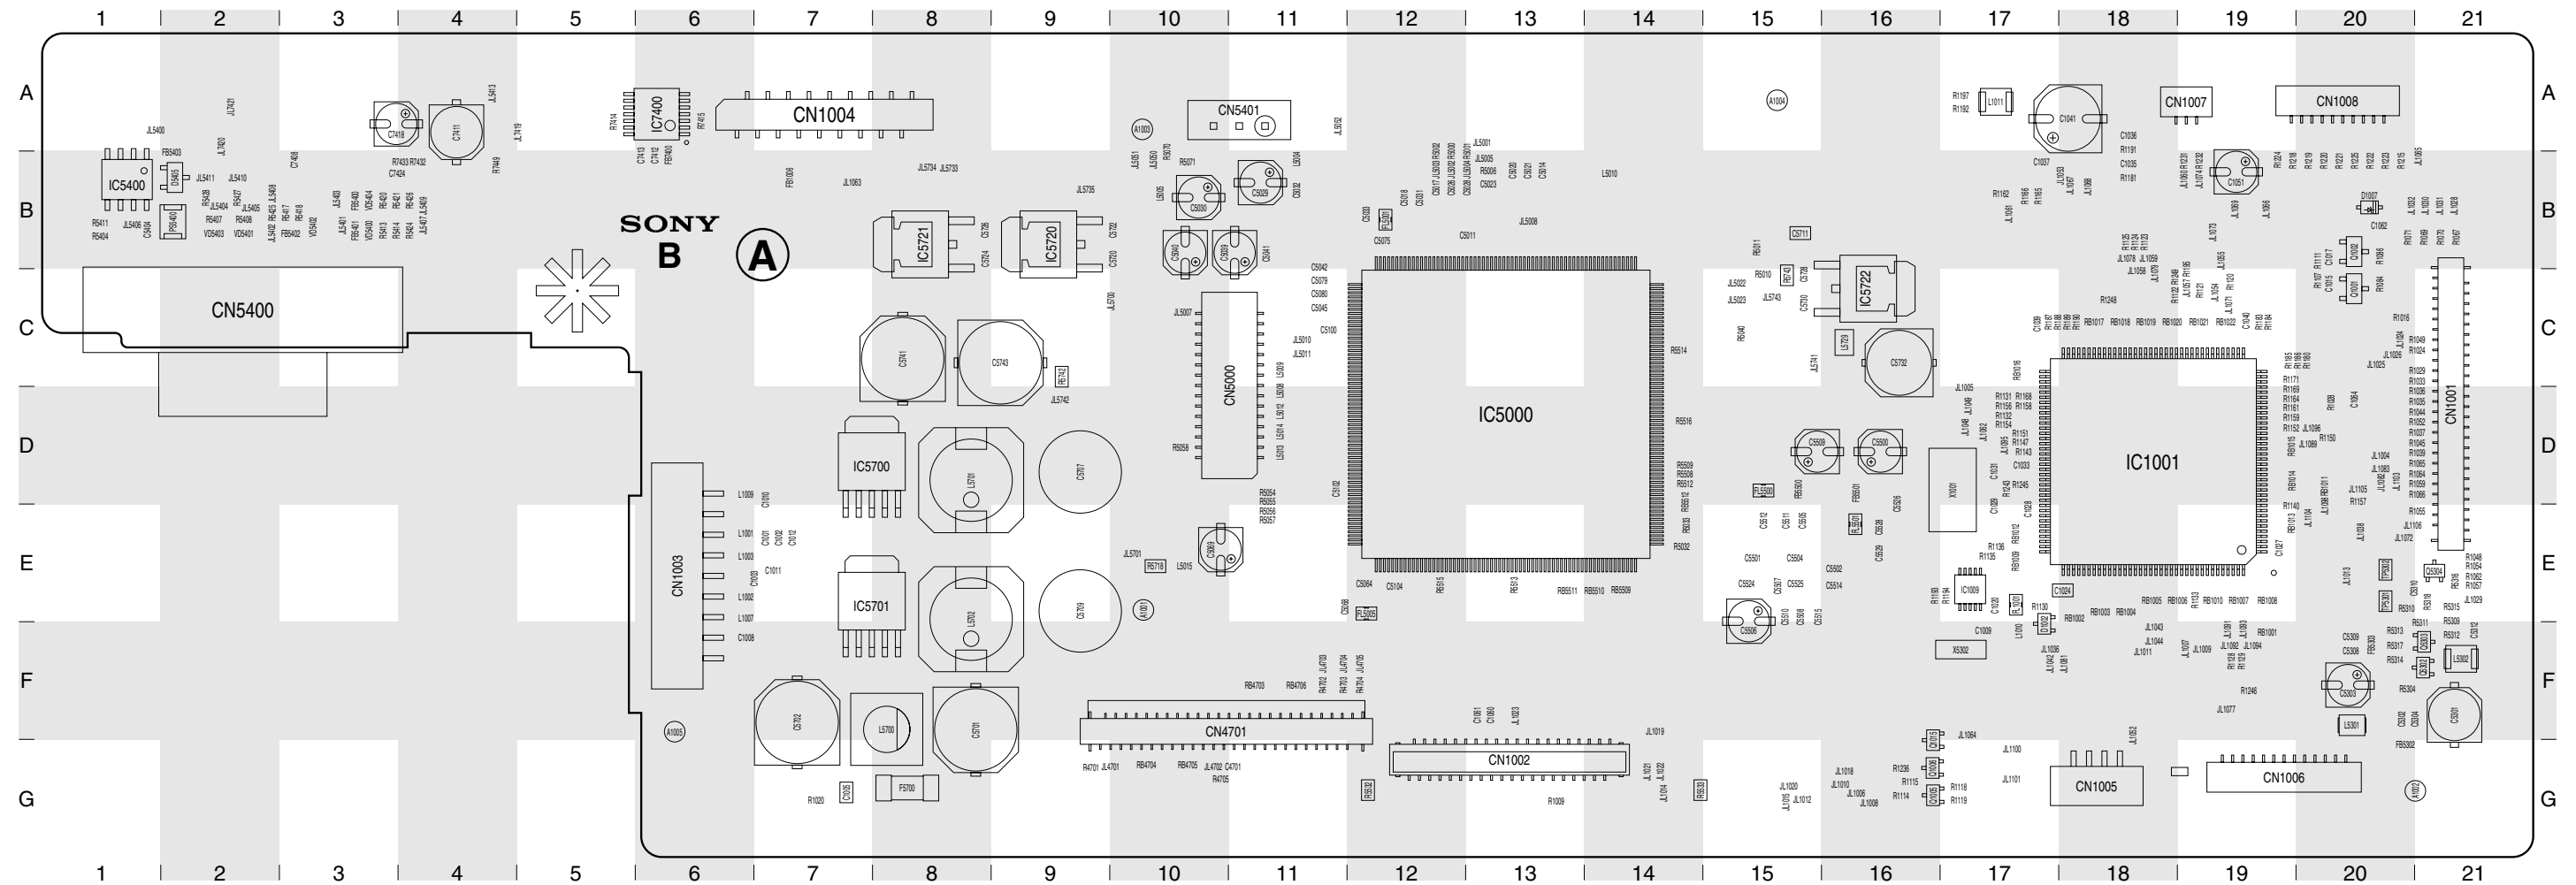


B BOARD (B)

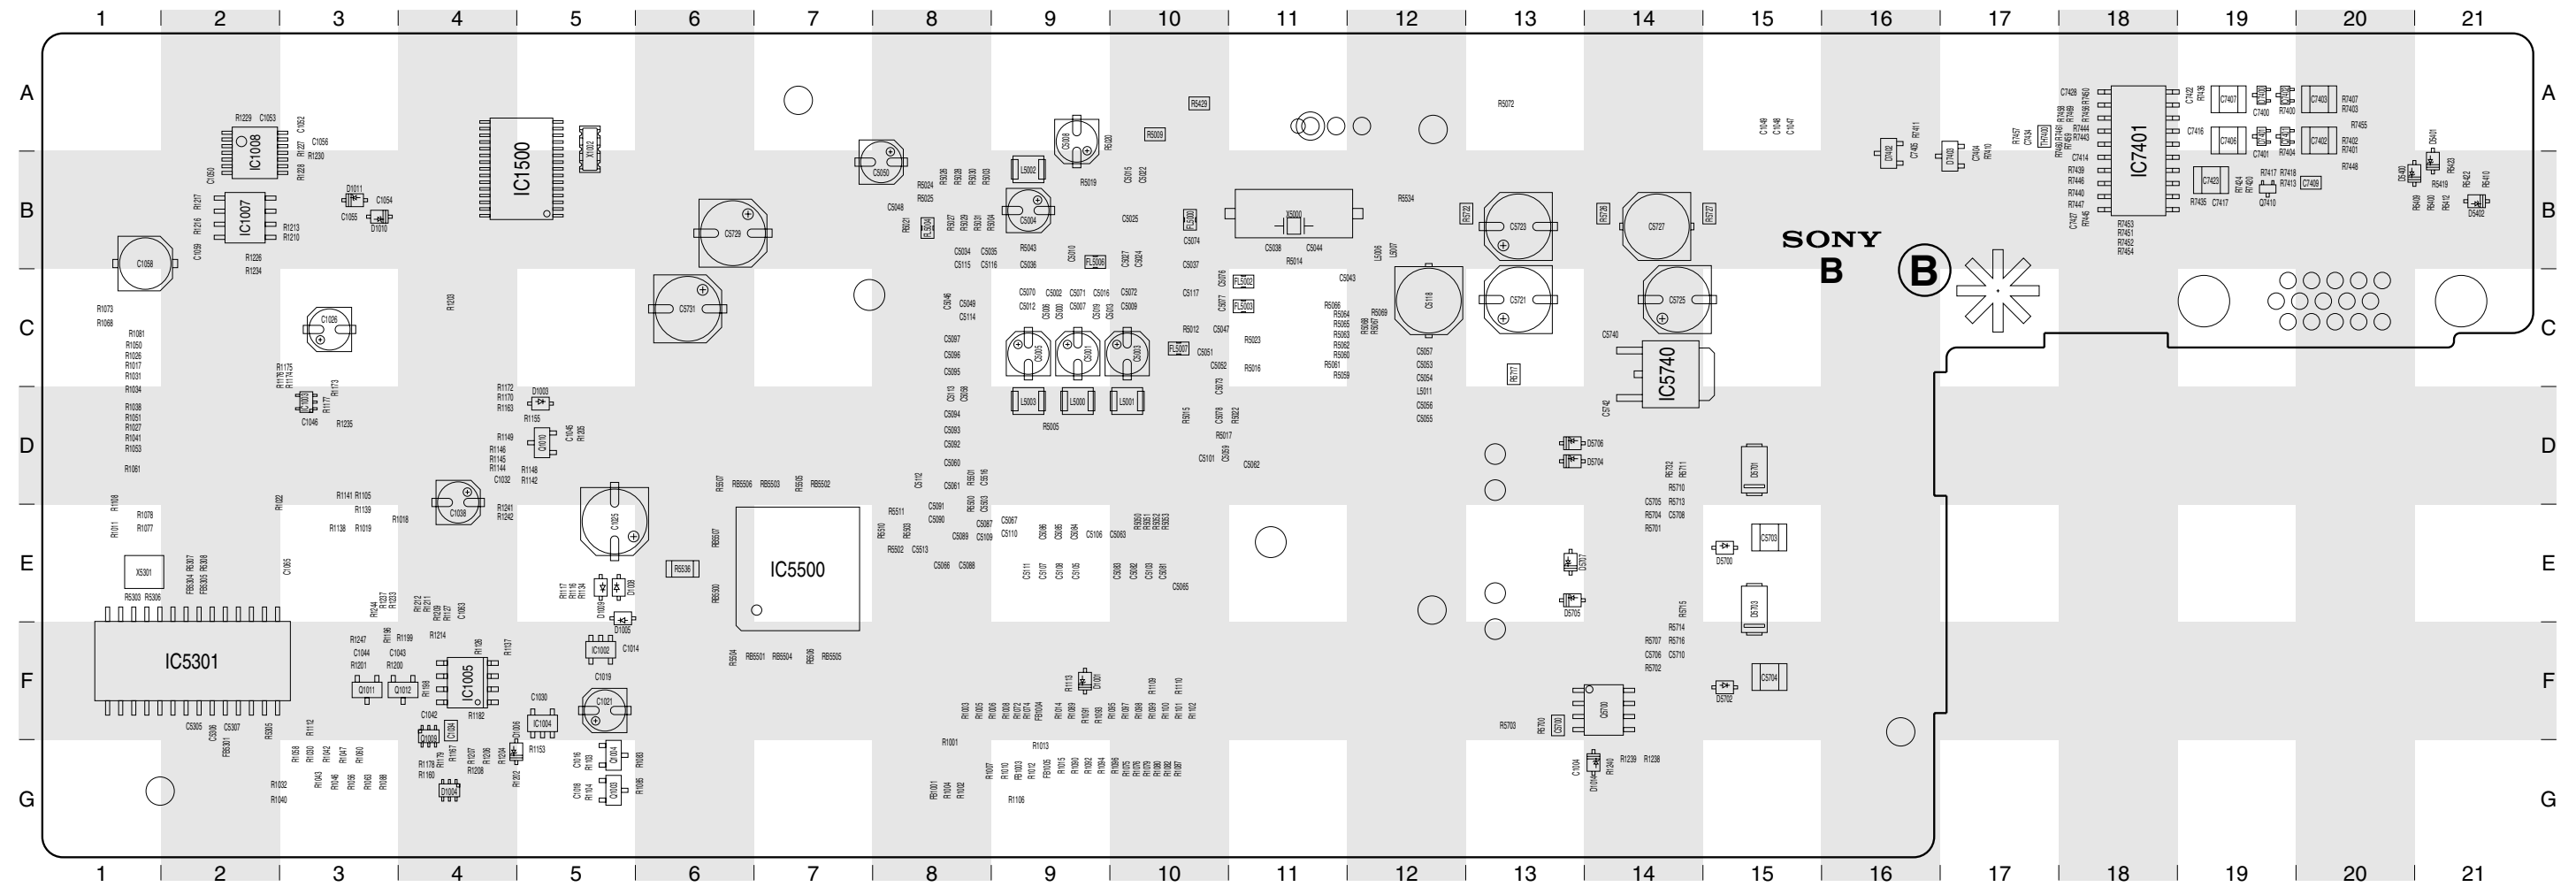

P Board



2-2. Schematic Diagram (KLV-S40A10 ONLY)

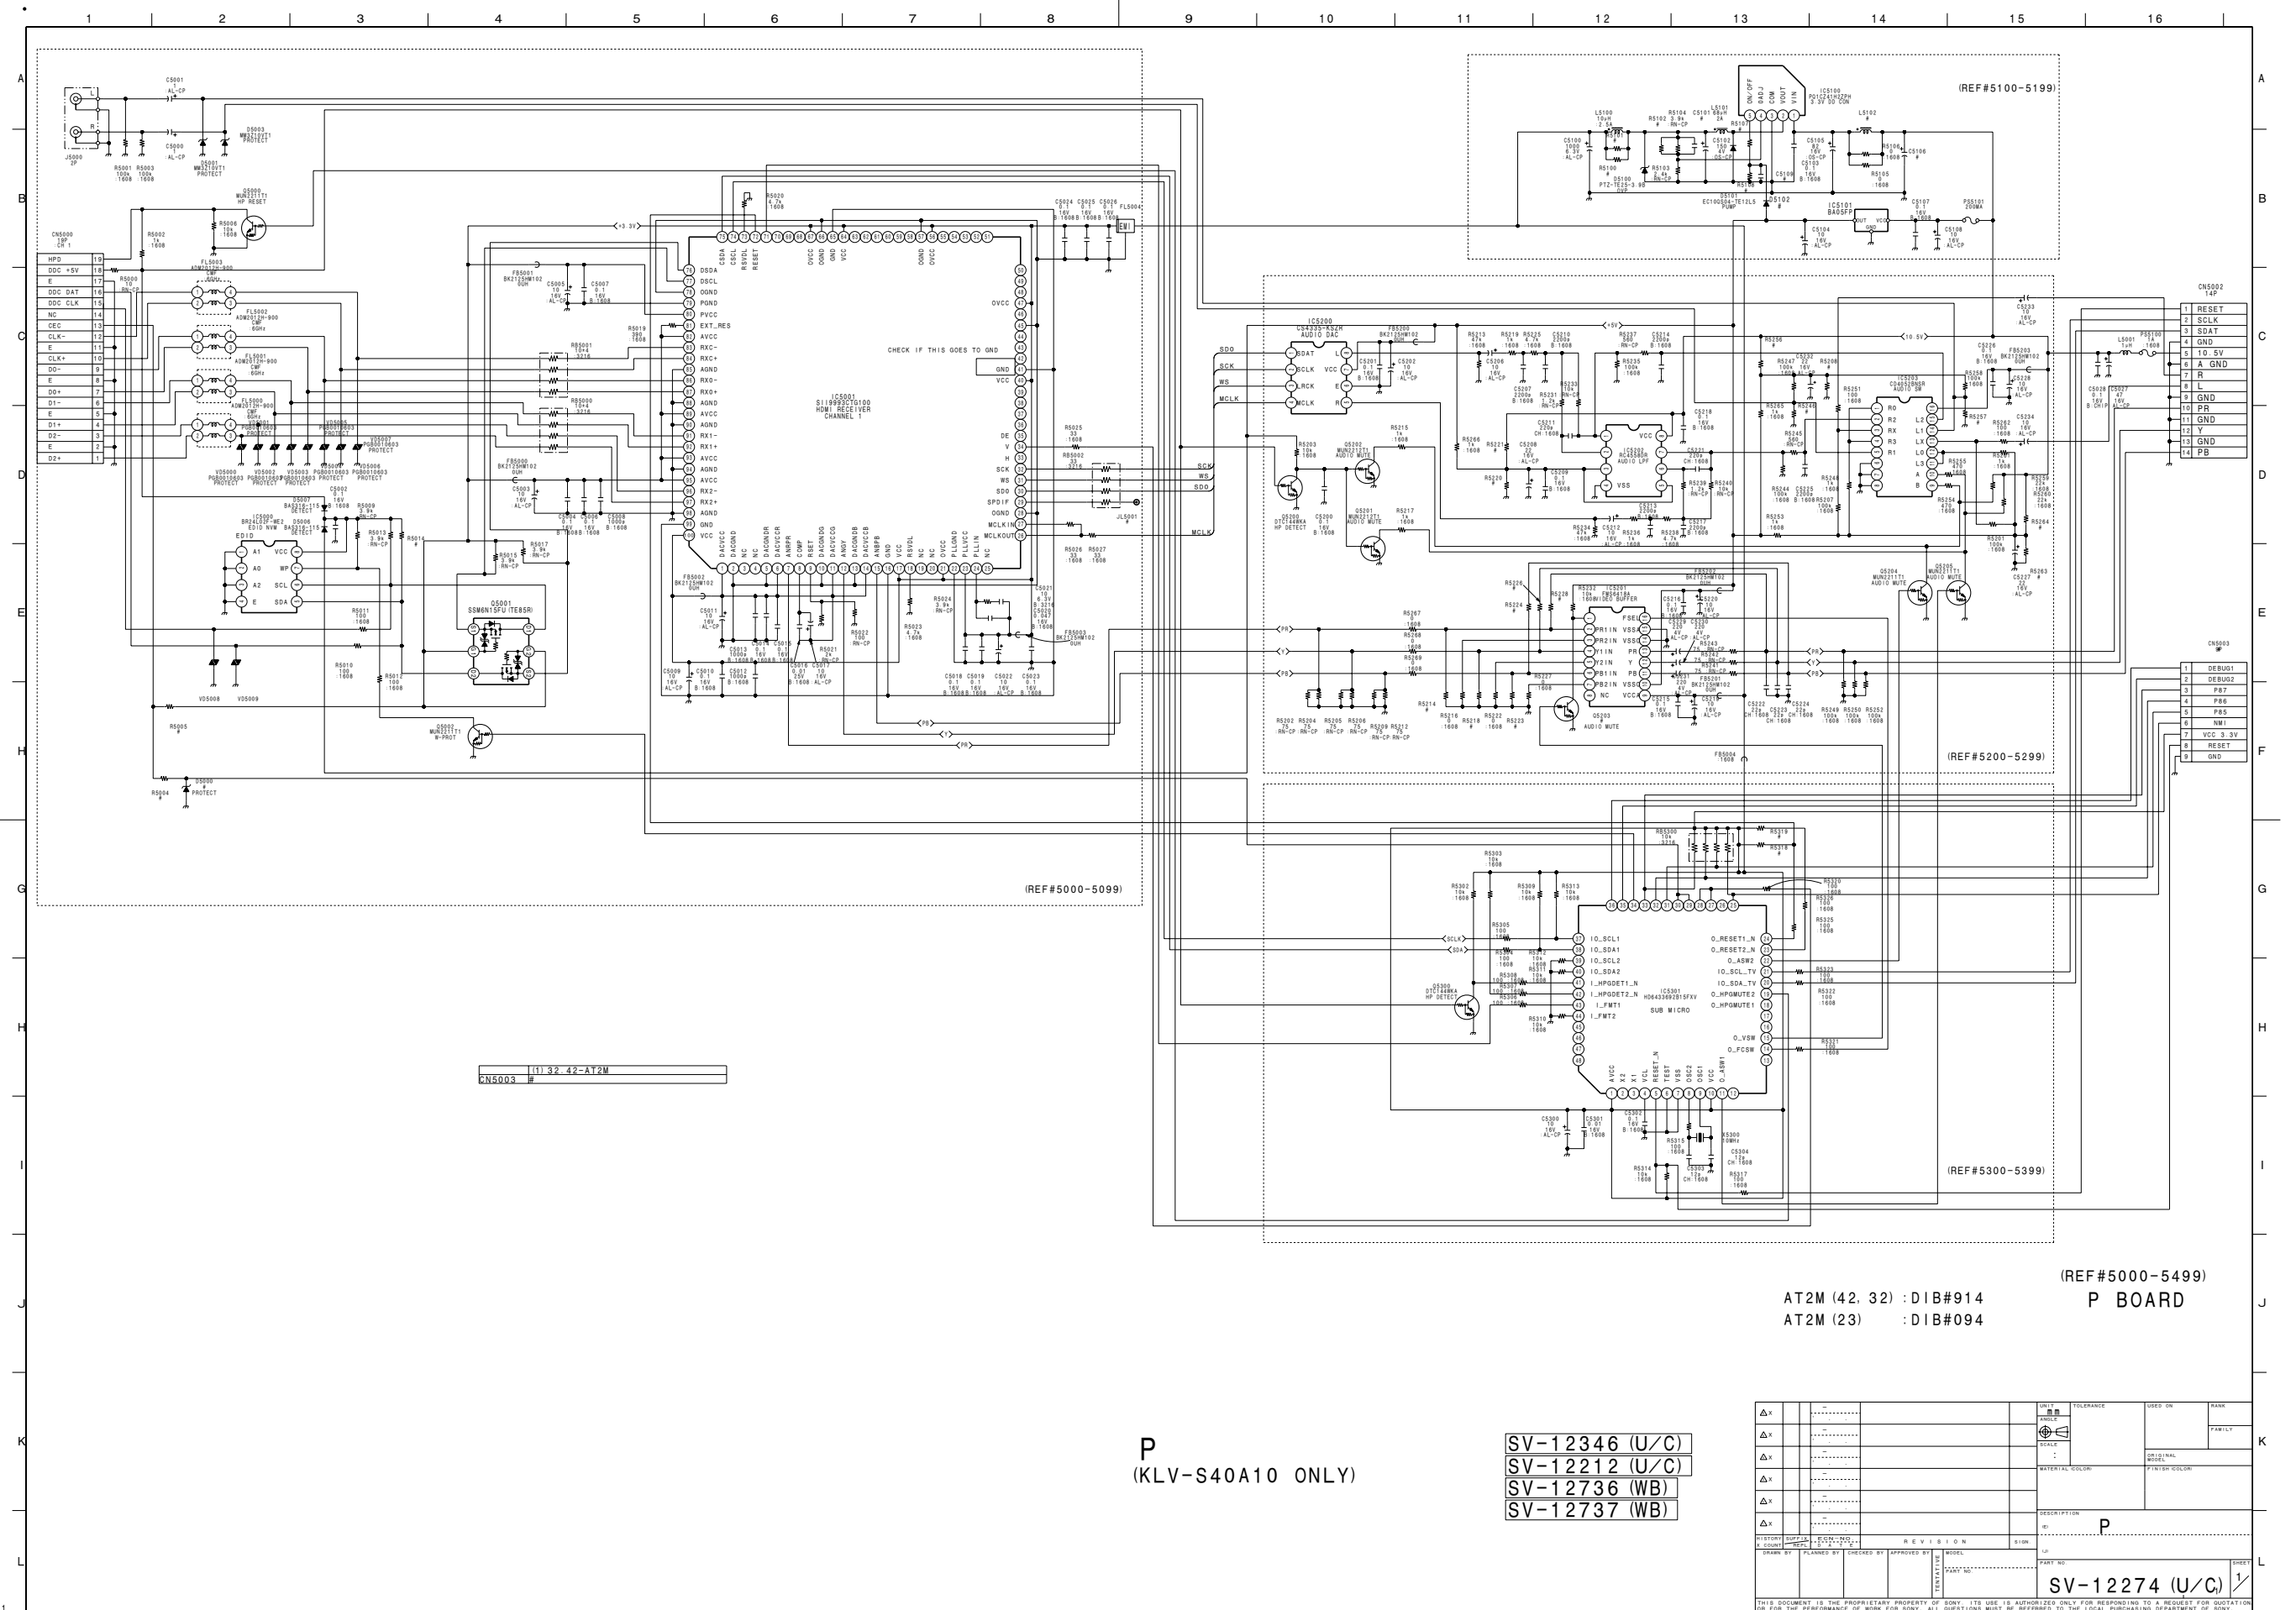

P Board



B



B

P Board



3. ELECTRICAL PARTS LIST

NOTE:

The components identified \triangle marked are critical for safety.
Replace only with the part number specified.

Les composants identifiés par la marque \triangle sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

When indicating parts by reference number, please include the board name.

- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

RESISTORS

- All resistors are in ohms
- F : nonflammable

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|--------------|----------|--------------|----------------------------------|---------------|-----------|
| 1 | | P | CAPACITOR | | C5000 | 1-126-193-11 | ELECT CHIP 1UF 20.00% 50V | | |
| 2 | | P | CAPACITOR | | C5001 | 1-126-193-11 | ELECT CHIP 1UF 20.00% 50V | | |
| 3 | | P | CAPACITOR | | C5002 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 4 | | P | CAPACITOR | | C5003 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 5 | | P | CAPACITOR | | C5004 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 6 | | P | CAPACITOR | | C5005 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 7 | | P | CAPACITOR | | C5006 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 8 | | P | CAPACITOR | | C5007 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 9 | | P | CAPACITOR | | C5008 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 10 | | P | CAPACITOR | | C5009 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 11 | | P | CAPACITOR | | C5010 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 12 | | P | CAPACITOR | | C5011 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 13 | | P | CAPACITOR | | C5012 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 14 | | P | CAPACITOR | | C5013 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 15 | | P | CAPACITOR | | C5014 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 16 | | P | CAPACITOR | | C5015 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 17 | | P | CAPACITOR | | C5016 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 18 | | P | CAPACITOR | | C5017 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 19 | | P | CAPACITOR | | C5018 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 20 | | P | CAPACITOR | | C5019 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 21 | | P | CAPACITOR | | C5020 | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V | | |
| 22 | | P | CAPACITOR | | C5021 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 23 | | P | CAPACITOR | | C5022 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 24 | | P | CAPACITOR | | C5023 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 25 | | P | CAPACITOR | | C5024 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 26 | | P | CAPACITOR | | C5025 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 27 | | P | CAPACITOR | | C5026 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 28 | | P | CAPACITOR | | C5027 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 29 | | P | CAPACITOR | | C5028 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 30 | | P | CAPACITOR | | C5100 | 1-100-588-21 | ELECT CHIP 1000UF 20% 6.3V | | |
| 31 | | P | CAPACITOR | | C5102 | 1-137-897-21 | ELECT CHIP 150UF 20% 4V | | |
| 32 | | P | CAPACITOR | | C5103 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 33 | | P | CAPACITOR | | C5104 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 34 | | P | CAPACITOR | | C5105 | 1-100-118-21 | ELECT CHIP 82UF 20% 16V | | |
| 35 | | P | CAPACITOR | | C5107 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 36 | | P | CAPACITOR | | C5108 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 37 | | P | CAPACITOR | | C5200 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 38 | | P | CAPACITOR | | C5201 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 39 | | P | CAPACITOR | | C5202 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 40 | | P | CAPACITOR | | C5203 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | KLV-S26/32A10 | |
| 41 | | P | CAPACITOR | | C5204 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | KLV-S26/32A10 | |
| 42 | | P | CAPACITOR | | C5205 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | KLV-S26/32A10 | |
| 43 | | P | CAPACITOR | | C5206 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 44 | | P | CAPACITOR | | C5207 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 45 | | P | CAPACITOR | | C5208 | 1-128-993-21 | ELECT CHIP 22UF 20% 10V | | |
| 46 | | P | CAPACITOR | | C5209 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 47 | | P | CAPACITOR | | C5210 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 48 | | P | CAPACITOR | | C5211 | 1-164-230-11 | CERAMIC CHIP 220PF 5.00% 50V | | |
| 49 | | P | CAPACITOR | | C5212 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 50 | | P | CAPACITOR | | C5213 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 51 | | P | CAPACITOR | | C5214 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 52 | | P | CAPACITOR | | C5215 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 53 | | P | CAPACITOR | | C5216 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 54 | | P | CAPACITOR | | C5217 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 55 | | P | CAPACITOR | | C5218 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 56 | | P | CAPACITOR | | C5219 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 57 | | P | CAPACITOR | | C5220 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 58 | | P | CAPACITOR | | C5221 | 1-164-230-11 | CERAMIC CHIP 220PF 5.00% 50V | | |
| 59 | | P | CAPACITOR | | C5222 | 1-162-919-11 | CERAMIC CHIP 22PF 5.00% 50V | | |
| 60 | | P | CAPACITOR | | C5223 | 1-162-919-11 | CERAMIC CHIP 22PF 5.00% 50V | | |
| 61 | | P | CAPACITOR | | C5224 | 1-162-919-11 | CERAMIC CHIP 22PF 5.00% 50V | | |
| 62 | | P | CAPACITOR | | C5225 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 63 | | P | CAPACITOR | | C5226 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 64 | | P | CAPACITOR | | C5227 | 1-128-993-21 | ELECT CHIP 22UF 20% 10V | | |
| 65 | | P | CAPACITOR | | C5228 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 66 | | P | CAPACITOR | | C5229 | 1-126-412-11 | ELECT CHIP 220UF 20.00% 4V | | |
| 67 | | P | CAPACITOR | | C5230 | 1-126-412-11 | ELECT CHIP 220UF 20.00% 4V | | |
| 68 | | P | CAPACITOR | | C5231 | 1-126-412-11 | ELECT CHIP 220UF 20.00% 4V | | |
| 69 | | P | CAPACITOR | | C5232 | 1-128-993-21 | ELECT CHIP 22UF 20% 10V | | |
| 70 | | P | CAPACITOR | | C5233 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 71 | | P | CAPACITOR | | C5234 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 72 | | P | CAPACITOR | | C5300 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 73 | | P | CAPACITOR | | C5301 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 74 | | P | CAPACITOR | | C5302 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|--------------|-----|----------|--------------|-------------------------------|---------------|-----------|
| 75 | | P | CAPACITOR | | C5303 | 1-162-916-11 | CERAMIC CHIP 12PF 5.00% 50V | | |
| 76 | | P | CAPACITOR | | C5304 | 1-162-916-11 | CERAMIC CHIP 12PF 5.00% 50V | | |
| 77 | | P | CONNECTOR | * | CN5000 | 1-818-400-11 | HDMI CONNECTOR | | |
| 78 | | P | CONNECTOR | | CN5002 | 1-794-519-21 | PIN, CONNECTOR (PC BOARD) 14P | | |
| 79 | | P | DIODE | | D5001 | 8-719-977-28 | DIODE DTZ10B | | |
| 80 | | P | DIODE | | D5003 | 8-719-977-28 | DIODE DTZ10B | | |
| 81 | | P | DIODE | | D5006 | 8-719-074-43 | DIODE BAS316-115 | | |
| 82 | | P | DIODE | | D5007 | 8-719-074-43 | DIODE BAS316-115 | | |
| 83 | | P | DIODE | | D5100 | 6-500-294-01 | DIODE PTZ-TE25-3.9B | | |
| 84 | | P | DIODE | | D5101 | 8-719-210-39 | DIODE EC10QS-04 | | |
| 85 | | P | FERRITE BEAD | | FB5000 | 1-414-235-22 | FERRITE 0UH | | |
| 86 | | P | FERRITE BEAD | | FB5001 | 1-414-235-22 | FERRITE 0UH | | |
| 87 | | P | FERRITE BEAD | | FB5002 | 1-414-235-22 | FERRITE 0UH | | |
| 88 | | P | FERRITE BEAD | | FB5003 | 1-414-235-22 | FERRITE 0UH | | |
| 89 | | P | FERRITE BEAD | | FB5004 | 1-414-445-11 | FERRITE 0UH | | |
| 90 | | P | FERRITE BEAD | | FB5200 | 1-414-235-22 | FERRITE 0UH | | |
| 91 | | P | FERRITE BEAD | | FB5201 | 1-414-235-22 | FERRITE 0UH | | |
| 92 | | P | FERRITE BEAD | | FB5202 | 1-414-235-22 | FERRITE 0UH | | |
| 93 | | P | FERRITE BEAD | | FB5203 | 1-414-235-22 | FERRITE 0UH | | |
| 94 | | P | FILTER | * | FL5000 | 1-813-308-11 | INDUCTOR 0UH | | |
| 95 | | P | FILTER | * | FL5001 | 1-813-308-11 | INDUCTOR 0UH | | |
| 96 | | P | FILTER | * | FL5002 | 1-813-308-11 | INDUCTOR 0UH | | |
| 97 | | P | FILTER | * | FL5003 | 1-813-308-11 | INDUCTOR 0UH | | |
| 98 | | P | FILTER | | FL5004 | 1-234-177-21 | FERRITE 0UH | | |
| 99 | | P | IC | | IC5000 | 6-704-001-01 | IC BR24L02F-WE2 | | |
| 100 | | P | IC | | IC5001 | 6-704-499-01 | IC SII9993CTG100 | KLV-S26/32A10 | |
| 101 | | P | IC | | IC5100 | 6-704-407-01 | IC PQ1CZ41H2ZPH | | |
| 102 | | P | IC | | IC5101 | 8-759-533-85 | IC L88M05T-FA-TL | | |
| 103 | | P | IC | | IC5200 | 6-704-819-01 | IC CS4335-KSZR | | |
| 104 | | P | IC | | IC5201 | 6-706-257-01 | IC FMS6418AM16X | | |
| 105 | | P | IC | | IC5202 | 8-759-382-59 | IC RC4558DR | | |
| 106 | | P | IC | | IC5203 | 6-703-042-01 | IC CD4052BNSR | | |
| 107 | | P | IC | | IC5301 | 6-805-688-01 | IC HD6433692B15FXV | | |
| 108 | | P | JACK | | J5000 | 1-794-623-21 | JACK, PIN 2P | | |
| 109 | | P | COIL | | L5001 | 1-412-026-11 | INDUCTOR 1UH | | |
| 110 | | P | COIL | | L5100 | 1-456-046-21 | INDUCTOR 10UH | | |
| 111 | | P | COIL | | L5101 | 1-400-303-21 | INDUCTOR 68UH | | |
| 112 | | P | IC LINK | △ | PS5100 | 1-576-612-21 | FUSE 1A 32V | | |
| 113 | | P | IC LINK | △ | PS5101 | 1-576-647-11 | FUSE 0.2A 50V | | |
| 114 | | P | TRANSISTOR | | Q5000 | 8-729-421-22 | TRANSISTOR UN2211 | | |
| 115 | | P | TRANSISTOR | | Q5001 | 6-550-014-01 | TRANSISTOR SSM6N15FU(TE85R) | | |
| 116 | | P | TRANSISTOR | | Q5002 | 8-729-421-22 | TRANSISTOR UN2211 | | |
| 117 | | P | TRANSISTOR | | Q5200 | 8-729-027-62 | TRANSISTOR DTC144WKA-T146 | | |
| 118 | | P | TRANSISTOR | | Q5201 | 8-729-024-88 | TRANSISTOR MUN2212T1 | | |
| 119 | | P | TRANSISTOR | | Q5202 | 8-729-024-88 | TRANSISTOR MUN2212T1 | | |
| 120 | | P | TRANSISTOR | | Q5204 | 8-729-421-22 | TRANSISTOR UN2211 | | |
| 121 | | P | TRANSISTOR | | Q5205 | 8-729-421-22 | TRANSISTOR UN2211 | | |
| 122 | | P | TRANSISTOR | | Q5300 | 8-729-027-62 | TRANSISTOR DTC144WKA-T146 | | |
| 123 | | P | RESISTOR | | R5000 | 1-218-644-11 | METAL CHIP 10 0.5% 1/10W | | |
| 124 | | P | RESISTOR | | R5001 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 125 | | P | RESISTOR | | R5002 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 126 | | P | RESISTOR | | R5003 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 127 | | P | RESISTOR | | R5006 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 128 | | P | RESISTOR | | R5009 | 1-218-706-11 | METAL CHIP 3.9K 0.5% 1/10W | | |
| 129 | | P | RESISTOR | | R5010 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 130 | | P | RESISTOR | | R5011 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 131 | | P | RESISTOR | | R5012 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 132 | | P | RESISTOR | | R5013 | 1-218-706-11 | METAL CHIP 3.9K 0.5% 1/10W | | |
| 133 | | P | RESISTOR | | R5015 | 1-218-706-11 | METAL CHIP 3.9K 0.5% 1/10W | | |
| 134 | | P | RESISTOR | | R5017 | 1-218-706-11 | METAL CHIP 3.9K 0.5% 1/10W | | |
| 135 | | P | RESISTOR | | R5019 | 1-216-816-11 | METAL CHIP 390 5% 1/10W | | |
| 136 | | P | RESISTOR | | R5020 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 137 | | P | RESISTOR | | R5021 | 1-218-854-11 | METAL CHIP 2K 0.5% 1/10W | | |
| 138 | | P | RESISTOR | | R5022 | 1-218-823-11 | METAL CHIP 100 0.5% 1/10W | | |
| 139 | | P | RESISTOR | | R5023 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 140 | | P | RESISTOR | | R5024 | 1-218-706-11 | METAL CHIP 3.9K 0.5% 1/10W | | |
| 141 | | P | RESISTOR | | R5025 | 1-216-803-11 | METAL CHIP 33 5% 1/10W | | |
| 142 | | P | RESISTOR | | R5026 | 1-216-803-11 | METAL CHIP 33 5% 1/10W | | |
| 143 | | P | RESISTOR | | R5027 | 1-216-803-11 | METAL CHIP 33 5% 1/10W | | |
| 144 | | P | RESISTOR | | R5103 | 1-218-701-11 | METAL CHIP 2.4K 0.5% 1/10W | | |
| 145 | | P | RESISTOR | | R5104 | 1-218-706-11 | METAL CHIP 3.9K 0.5% 1/10W | | |
| 146 | | P | RESISTOR | | R5105 | 1-216-864-11 | SHORT CHIP 0 | | |
| 147 | | P | RESISTOR | | R5106 | 1-216-864-11 | SHORT CHIP 0 | | |
| 148 | | P | RESISTOR | | R5201 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|--------------|----------|--------------|----------------------------|---------------|-----------|
| 149 | | P | RESISTOR | | R5202 | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W | | |
| 150 | | P | RESISTOR | | R5203 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 151 | | P | RESISTOR | | R5204 | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W | | |
| 152 | | P | RESISTOR | | R5205 | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W | | |
| 153 | | P | RESISTOR | | R5206 | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W | | |
| 154 | | P | RESISTOR | | R5207 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 155 | | P | RESISTOR | | R5209 | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W | | |
| 156 | | P | RESISTOR | | R5212 | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W | | |
| 157 | | P | RESISTOR | | R5213 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 158 | | P | RESISTOR | | R5214 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S26/32A10 | |
| 159 | | P | RESISTOR | | R5215 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 160 | | P | RESISTOR | | R5216 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S26/32A10 | |
| 161 | | P | RESISTOR | | R5216 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 162 | | P | RESISTOR | | R5217 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 163 | | P | RESISTOR | | R5218 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S26/32A10 | |
| 164 | | P | RESISTOR | | R5219 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 165 | | P | RESISTOR | | R5222 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S26/32A10 | |
| 166 | | P | RESISTOR | | R5222 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 167 | | P | RESISTOR | | R5223 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S26/32A10 | |
| 168 | | P | RESISTOR | | R5225 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 169 | | P | RESISTOR | | R5227 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | KLV-S26/32A10 | |
| 170 | | P | RESISTOR | | R5227 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 171 | | P | RESISTOR | | R5231 | 1-218-694-11 | METAL CHIP 1.2K 0.5% 1/10W | | |
| 172 | | P | RESISTOR | | R5232 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 173 | | P | RESISTOR | | R5233 | 1-218-716-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 174 | | P | RESISTOR | | R5234 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 175 | | P | RESISTOR | | R5235 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 176 | | P | RESISTOR | | R5236 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 177 | | P | RESISTOR | | R5237 | 1-218-686-11 | METAL CHIP 560 0.5% 1/10W | | |
| 178 | | P | RESISTOR | | R5238 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 179 | | P | RESISTOR | | R5239 | 1-218-694-11 | METAL CHIP 1.2K 0.5% 1/10W | | |
| 180 | | P | RESISTOR | | R5240 | 1-218-716-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 181 | | P | RESISTOR | | R5241 | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W | | |
| 182 | | P | RESISTOR | | R5242 | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W | | |
| 183 | | P | RESISTOR | | R5243 | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W | | |
| 184 | | P | RESISTOR | | R5244 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 185 | | P | RESISTOR | | R5245 | 1-218-686-11 | METAL CHIP 560 0.5% 1/10W | | |
| 186 | | P | RESISTOR | | R5247 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 187 | | P | RESISTOR | | R5248 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 188 | | P | RESISTOR | | R5249 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 189 | | P | RESISTOR | | R5250 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 190 | | P | RESISTOR | | R5251 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 191 | | P | RESISTOR | | R5252 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 192 | | P | RESISTOR | | R5253 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 193 | | P | RESISTOR | | R5254 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 194 | | P | RESISTOR | | R5255 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 195 | | P | RESISTOR | | R5258 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 196 | | P | RESISTOR | | R5259 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 197 | | P | RESISTOR | | R5260 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 198 | | P | RESISTOR | | R5261 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 199 | | P | RESISTOR | | R5262 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 200 | | P | RESISTOR | | R5265 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 201 | | P | RESISTOR | | R5266 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 202 | | P | RESISTOR | | R5267 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 203 | | P | RESISTOR | | R5268 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 204 | | P | RESISTOR | | R5269 | 1-216-864-11 | SHORT CHIP 0 | KLV-S40A10 | |
| 205 | | P | RESISTOR | | R5302 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 206 | | P | RESISTOR | | R5303 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 207 | | P | RESISTOR | | R5304 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 208 | | P | RESISTOR | | R5305 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 209 | | P | RESISTOR | | R5306 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 210 | | P | RESISTOR | | R5307 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 211 | | P | RESISTOR | | R5308 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 212 | | P | RESISTOR | | R5309 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 213 | | P | RESISTOR | | R5310 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 214 | | P | RESISTOR | | R5311 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 215 | | P | RESISTOR | | R5312 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 216 | | P | RESISTOR | | R5313 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 217 | | P | RESISTOR | | R5314 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 218 | | P | RESISTOR | | R5315 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 219 | | P | RESISTOR | | R5317 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 220 | | P | RESISTOR | | R5320 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 221 | | P | RESISTOR | | R5321 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 222 | | P | RESISTOR | | R5322 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|--------------|----------|--------------|----------------------------------|---------------|-----------|
| 223 | | P | RESISTOR | | R5323 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 224 | | P | RESISTOR | | R5325 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 225 | | P | RESISTOR | | R5326 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 226 | | P | NETWORK | | RB5000 | 1-233-574-11 | RES, CHIP NETWORK 10 (3216) | | |
| 227 | | P | NETWORK | | RB5001 | 1-233-574-11 | RES, CHIP NETWORK 10 (3216) | | |
| 228 | | P | NETWORK | | RB5002 | 1-234-524-21 | RES, CHIP NETWORK 33 (3216) | | |
| 229 | | P | NETWORK | | RB5300 | 1-236-908-11 | RES, CHIP NETWORK 10K (3216) | | |
| 230 | | P | VARISTOR | | VD5000 | 1-805-043-11 | ABSORBER, CHIP SURGE | | |
| 231 | | P | VARISTOR | | VD5001 | 1-805-043-11 | ABSORBER, CHIP SURGE | | |
| 232 | | P | VARISTOR | | VD5002 | 1-805-043-11 | ABSORBER, CHIP SURGE | | |
| 233 | | P | VARISTOR | | VD5003 | 1-805-043-11 | ABSORBER, CHIP SURGE | | |
| 234 | | P | VARISTOR | | VD5004 | 1-805-043-11 | ABSORBER, CHIP SURGE | | |
| 235 | | P | VARISTOR | | VD5005 | 1-805-043-11 | ABSORBER, CHIP SURGE | | |
| 236 | | P | VARISTOR | | VD5006 | 1-805-043-11 | ABSORBER, CHIP SURGE | | |
| 237 | | P | VARISTOR | | VD5007 | 1-805-043-11 | ABSORBER, CHIP SURGE | | |
| 238 | | P | VARISTOR | | VD5008 | 1-805-043-11 | ABSORBER, CHIP SURGE | | |
| 239 | | P | VARISTOR | | VD5009 | 1-805-043-11 | ABSORBER, CHIP SURGE | | |
| 240 | | P | CRYSTAL | | X5300 | 1-767-984-21 | VIBRATOR, CRYSTAL | | |
| 241 | | B | CAPACITOR | | C1001 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 242 | | B | CAPACITOR | | C1002 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 243 | | B | CAPACITOR | | C1003 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 244 | | B | CAPACITOR | | C1004 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 245 | | B | CAPACITOR | | C1008 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 246 | | B | CAPACITOR | | C1010 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 247 | | B | CAPACITOR | | C1014 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 248 | | B | CAPACITOR | | C1019 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 249 | | B | CAPACITOR | | C1020 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 250 | | B | CAPACITOR | | C1021 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 251 | | B | CAPACITOR | | C1024 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 252 | | B | CAPACITOR | | C1025 | 1-126-206-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 253 | | B | CAPACITOR | | C1026 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 254 | | B | CAPACITOR | | C1027 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 255 | | B | CAPACITOR | | C1028 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 256 | | B | CAPACITOR | | C1029 | 1-162-917-11 | CERAMIC CHIP 15PF 5.00% 50V | | |
| 257 | | B | CAPACITOR | | C1030 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 258 | | B | CAPACITOR | | C1031 | 1-162-917-11 | CERAMIC CHIP 15PF 5.00% 50V | | |
| 259 | | B | CAPACITOR | | C1032 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 260 | | B | CAPACITOR | | C1033 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 261 | | B | CAPACITOR | | C1034 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 262 | | B | CAPACITOR | | C1038 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 263 | | B | CAPACITOR | | C1039 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 264 | | B | CAPACITOR | | C1040 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 265 | | B | CAPACITOR | | C1042 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 266 | | B | CAPACITOR | | C1045 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 267 | | B | CAPACITOR | | C1046 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 268 | | B | CAPACITOR | | C1047 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 269 | | B | CAPACITOR | | C1048 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 270 | | B | CAPACITOR | | C1049 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 271 | | B | CAPACITOR | | C1050 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 272 | | B | CAPACITOR | | C1051 | 1-126-390-11 | ELECT CHIP 22UF 20.00% 6.3V | | |
| 273 | | B | CAPACITOR | | C1052 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 274 | | B | CAPACITOR | | C1053 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 275 | | B | CAPACITOR | | C1054 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 276 | | B | CAPACITOR | | C1055 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 277 | | B | CAPACITOR | | C1058 | 1-126-391-11 | ELECT CHIP 47UF 20.00% 6.3V | | |
| 278 | | B | CAPACITOR | | C1059 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 279 | | B | CAPACITOR | | C1060 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 280 | | B | CAPACITOR | | C1061 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 281 | | B | CAPACITOR | | C1062 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 282 | | B | CAPACITOR | | C1063 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 283 | | B | CAPACITOR | | C1064 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 284 | | B | CAPACITOR | | C1065 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 285 | | B | CAPACITOR | | C5000 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 286 | | B | CAPACITOR | | C5001 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 287 | | B | CAPACITOR | | C5003 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 288 | | B | CAPACITOR | | C5004 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 289 | | B | CAPACITOR | | C5005 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 290 | | B | CAPACITOR | | C5006 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 291 | | B | CAPACITOR | | C5007 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 292 | | B | CAPACITOR | | C5009 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 293 | | B | CAPACITOR | | C5010 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 294 | | B | CAPACITOR | | C5012 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 295 | | B | CAPACITOR | | C5013 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 296 | | B | CAPACITOR | | C5014 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | KLV-S26/32A10 | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|--------------|----------|--------------|----------------------------------|---------------|-----------|
| 297 | | B | CAPACITOR | | C5014 | 1-115-467-11 | CERAMIC CHIP 0.22UF 10.00% 10V | KLV-S40A10 | |
| 298 | | B | CAPACITOR | | C5015 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 299 | | B | CAPACITOR | | C5017 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | KLV-S26/32A10 | |
| 300 | | B | CAPACITOR | | C5017 | 1-115-467-11 | CERAMIC CHIP 0.22UF 10.00% 10V | KLV-S40A10 | |
| 301 | | B | CAPACITOR | | C5018 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 302 | | B | CAPACITOR | | C5019 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 303 | | B | CAPACITOR | | C5020 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | KLV-S26/32A10 | |
| 304 | | B | CAPACITOR | | C5020 | 1-115-467-11 | CERAMIC CHIP 0.22UF 10.00% 10V | KLV-S40A10 | |
| 305 | | B | CAPACITOR | | C5021 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 306 | | B | CAPACITOR | | C5022 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 307 | | B | CAPACITOR | | C5024 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 308 | | B | CAPACITOR | | C5026 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | KLV-S26/32A10 | |
| 309 | | B | CAPACITOR | | C5026 | 1-115-467-11 | CERAMIC CHIP 0.22UF 10.00% 10V | KLV-S40A10 | |
| 310 | | B | CAPACITOR | | C5027 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 311 | | B | CAPACITOR | | C5028 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 312 | | B | CAPACITOR | | C5029 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 313 | | B | CAPACITOR | | C5030 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 314 | | B | CAPACITOR | | C5031 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | KLV-S26/32A10 | |
| 315 | | B | CAPACITOR | | C5031 | 1-115-467-11 | CERAMIC CHIP 0.22UF 10.00% 10V | KLV-S40A10 | |
| 316 | | B | CAPACITOR | | C5032 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 317 | | B | CAPACITOR | | C5033 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 318 | | B | CAPACITOR | | C5034 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 319 | | B | CAPACITOR | | C5035 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 320 | | B | CAPACITOR | | C5036 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 321 | | B | CAPACITOR | | C5037 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 322 | | B | CAPACITOR | | C5038 | 1-162-916-11 | CERAMIC CHIP 12PF 5.00% 50V | | |
| 323 | | B | CAPACITOR | | C5039 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 324 | | B | CAPACITOR | | C5040 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 325 | | B | CAPACITOR | | C5041 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 326 | | B | CAPACITOR | | C5042 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 327 | | B | CAPACITOR | | C5043 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 328 | | B | CAPACITOR | | C5044 | 1-162-917-11 | CERAMIC CHIP 15PF 5.00% 50V | | |
| 329 | | B | CAPACITOR | | C5045 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 330 | | B | CAPACITOR | | C5046 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 331 | | B | CAPACITOR | | C5047 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 332 | | B | CAPACITOR | | C5048 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 333 | | B | CAPACITOR | | C5049 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 334 | | B | CAPACITOR | | C5050 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 335 | | B | CAPACITOR | | C5051 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 336 | | B | CAPACITOR | | C5052 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 337 | | B | CAPACITOR | | C5053 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 338 | | B | CAPACITOR | | C5054 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 339 | | B | CAPACITOR | | C5055 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 340 | | B | CAPACITOR | | C5056 | 1-164-315-11 | CERAMIC CHIP 470PF 5.00% 50V | | |
| 341 | | B | CAPACITOR | | C5057 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 342 | | B | CAPACITOR | | C5058 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 343 | | B | CAPACITOR | | C5059 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 344 | | B | CAPACITOR | | C5060 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 345 | | B | CAPACITOR | | C5061 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 346 | | B | CAPACITOR | | C5062 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 347 | | B | CAPACITOR | | C5063 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 348 | | B | CAPACITOR | | C5064 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 349 | | B | CAPACITOR | | C5065 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 350 | | B | CAPACITOR | | C5066 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 351 | | B | CAPACITOR | | C5067 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 352 | | B | CAPACITOR | | C5068 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 353 | | B | CAPACITOR | | C5069 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 354 | | B | CAPACITOR | | C5070 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 355 | | B | CAPACITOR | | C5071 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 356 | | B | CAPACITOR | | C5072 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 357 | | B | CAPACITOR | | C5073 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 358 | | B | CAPACITOR | | C5074 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 359 | | B | CAPACITOR | | C5075 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 360 | | B | CAPACITOR | | C5076 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 361 | | B | CAPACITOR | | C5077 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 362 | | B | CAPACITOR | | C5078 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 363 | | B | CAPACITOR | | C5079 | 1-164-315-11 | CERAMIC CHIP 470PF 5.00% 50V | | |
| 364 | | B | CAPACITOR | | C5080 | 1-164-315-11 | CERAMIC CHIP 470PF 5.00% 50V | | |
| 365 | | B | CAPACITOR | | C5081 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 366 | | B | CAPACITOR | | C5082 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 367 | | B | CAPACITOR | | C5083 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 368 | | B | CAPACITOR | | C5084 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 369 | | B | CAPACITOR | | C5085 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 370 | | B | CAPACITOR | | C5086 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|--------------|----------|--------------|----------------------------------|-----------|-----------|
| 371 | | B | CAPACITOR | | C5087 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 372 | | B | CAPACITOR | | C5088 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 373 | | B | CAPACITOR | | C5089 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 374 | | B | CAPACITOR | | C5090 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 375 | | B | CAPACITOR | | C5091 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 376 | | B | CAPACITOR | | C5092 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 377 | | B | CAPACITOR | | C5093 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 378 | | B | CAPACITOR | | C5094 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 379 | | B | CAPACITOR | | C5095 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 380 | | B | CAPACITOR | | C5096 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 381 | | B | CAPACITOR | | C5097 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 382 | | B | CAPACITOR | | C5100 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 383 | | B | CAPACITOR | | C5101 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 384 | | B | CAPACITOR | | C5102 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 385 | | B | CAPACITOR | | C5103 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 386 | | B | CAPACITOR | | C5104 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 387 | | B | CAPACITOR | | C5105 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 388 | | B | CAPACITOR | | C5106 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 389 | | B | CAPACITOR | | C5107 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 390 | | B | CAPACITOR | | C5108 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 391 | | B | CAPACITOR | | C5109 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 392 | | B | CAPACITOR | | C5110 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 393 | | B | CAPACITOR | | C5111 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 394 | | B | CAPACITOR | | C5112 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 395 | | B | CAPACITOR | | C5113 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 396 | | B | CAPACITOR | | C5114 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 397 | | B | CAPACITOR | | C5115 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 398 | | B | CAPACITOR | | C5116 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 399 | | B | CAPACITOR | | C5117 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 400 | | B | CAPACITOR | | C5404 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 401 | | B | CAPACITOR | | C5500 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 402 | | B | CAPACITOR | | C5501 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 403 | | B | CAPACITOR | | C5502 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 404 | | B | CAPACITOR | | C5503 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 405 | | B | CAPACITOR | | C5504 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 406 | | B | CAPACITOR | | C5505 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 407 | | B | CAPACITOR | | C5506 | 1-126-398-11 | ELECT CHIP 4.7UF 20.00% 35V | | |
| 408 | | B | CAPACITOR | | C5507 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 409 | | B | CAPACITOR | | C5508 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 410 | | B | CAPACITOR | | C5509 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 411 | | B | CAPACITOR | | C5510 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 412 | | B | CAPACITOR | | C5511 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 413 | | B | CAPACITOR | | C5512 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 414 | | B | CAPACITOR | | C5513 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 415 | | B | CAPACITOR | | C5514 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 416 | | B | CAPACITOR | | C5515 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 417 | | B | CAPACITOR | | C5516 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 418 | | B | CAPACITOR | | C5517 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 419 | | B | CAPACITOR | | C5518 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 420 | | B | CAPACITOR | | C5519 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 421 | | B | CAPACITOR | | C5520 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 422 | | B | CAPACITOR | | C5521 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 423 | | B | CAPACITOR | | C5522 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 424 | | B | CAPACITOR | | C5523 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 425 | | B | CAPACITOR | | C5524 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 426 | | B | CAPACITOR | | C5525 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 427 | | B | CAPACITOR | | C5526 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 428 | | B | CAPACITOR | | C5528 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 429 | | B | CAPACITOR | | C5529 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 430 | | B | CAPACITOR | | C5530 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 431 | | B | CAPACITOR | | C5700 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 432 | | B | CAPACITOR | | C5701 | 1-128-536-11 | ELECT CHIP 100UF 20.00% 25V | | |
| 433 | | B | CAPACITOR | | C5702 | 1-128-536-11 | ELECT CHIP 100UF 20.00% 25V | | |
| 434 | | B | CAPACITOR | | C5703 | 1-127-738-91 | CERAMIC CHIP 4.7UF 10% 25V | | |
| 435 | | B | CAPACITOR | | C5704 | 1-127-738-91 | CERAMIC CHIP 4.7UF 10% 25V | | |
| 436 | | B | CAPACITOR | | C5705 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 437 | | B | CAPACITOR | | C5706 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 438 | | B | CAPACITOR | | C5707 | 1-135-372-11 | ELECT 470UF 20% 10V | | |
| 439 | | B | CAPACITOR | | C5709 | 1-135-372-11 | ELECT 470UF 20% 10V | | |
| 440 | | B | CAPACITOR | | C5720 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 441 | | B | CAPACITOR | | C5721 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 442 | | B | CAPACITOR | | C5722 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 443 | | B | CAPACITOR | | C5723 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 444 | | B | CAPACITOR | | C5724 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|--------------|-----|----------|--------------|---------------------------------|-----------|-----------|
| 445 | | B | CAPACITOR | | C5725 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 446 | | B | CAPACITOR | | C5726 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 447 | | B | CAPACITOR | | C5727 | 1-100-551-21 | ELECT CHIP 22UF 20% 20V | | |
| 448 | | B | CAPACITOR | | C5728 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 449 | | B | CAPACITOR | | C5729 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 450 | | B | CAPACITOR | | C5730 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 451 | | B | CAPACITOR | | C5731 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 452 | | B | CAPACITOR | | C5732 | 1-100-551-21 | ELECT CHIP 22UF 20% 20V | | |
| 453 | | B | CAPACITOR | | C5740 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 454 | | B | CAPACITOR | | C5741 | 1-128-536-11 | ELECT CHIP 100UF 20.00% 25V | | |
| 455 | | B | CAPACITOR | | C5742 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 456 | | B | CAPACITOR | | C5743 | 1-128-536-11 | ELECT CHIP 100UF 20.00% 25V | | |
| 457 | | B | CAPACITOR | | C7400 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 458 | | B | CAPACITOR | | C7401 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 459 | | B | CAPACITOR | | C7402 | 1-127-738-91 | CERAMIC CHIP 4.7UF 10% 25V | | |
| 460 | | B | CAPACITOR | | C7403 | 1-127-738-91 | CERAMIC CHIP 4.7UF 10% 25V | | |
| 461 | | B | CAPACITOR | | C7404 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 462 | | B | CAPACITOR | | C7405 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 463 | | B | CAPACITOR | | C7406 | 1-127-738-91 | CERAMIC CHIP 4.7UF 10% 25V | | |
| 464 | | B | CAPACITOR | | C7407 | 1-127-738-91 | CERAMIC CHIP 4.7UF 10% 25V | | |
| 465 | | B | CAPACITOR | | C7408 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 466 | | B | CAPACITOR | | C7409 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 467 | | B | CAPACITOR | | C7411 | 1-126-391-11 | ELECT CHIP 47UF 20.00% 6.3V | | |
| 468 | | B | CAPACITOR | | C7412 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 469 | | B | CAPACITOR | | C7413 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 470 | | B | CAPACITOR | | C7414 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 471 | | B | CAPACITOR | | C7416 | 1-110-563-11 | CERAMIC CHIP 0.068UF 10.00% 16V | | |
| 472 | | B | CAPACITOR | | C7417 | 1-162-960-11 | CERAMIC CHIP 220PF 10.00% 50V | | |
| 473 | | B | CAPACITOR | | C7418 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 474 | | B | CAPACITOR | | C7422 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 475 | | B | CAPACITOR | | C7423 | 1-127-738-91 | CERAMIC CHIP 4.7UF 10% 25V | | |
| 476 | | B | CAPACITOR | | C7424 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 477 | | B | CAPACITOR | | C7427 | 1-162-960-11 | CERAMIC CHIP 220PF 10.00% 50V | | |
| 478 | | B | CAPACITOR | | C7428 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 479 | | B | CAPACITOR | | C7434 | 1-162-919-11 | CERAMIC CHIP 22PF 5.00% 50V | | |
| 480 | | B | CONNECTOR | | CN1001 | 1-778-652-11 | CONNECTOR, FFC (ZIF) 50P | | |
| 481 | | B | CONNECTOR | | CN1003 | 1-816-296-21 | PIN, CONNECTOR (PC BOARD) 9P | | |
| 482 | | B | CONNECTOR | | CN1004 | 1-779-936-21 | CONNECTOR, FFC/FPC 18P | | |
| 483 | | B | CONNECTOR | | CN1006 | 1-779-772-11 | CONNECTOR 13P | | |
| 484 | | B | CONNECTOR | | CN1007 | 1-785-946-21 | CONNECTOR 3P | | |
| 485 | | B | CONNECTOR | | CN1008 | 1-784-254-11 | CONNECTOR 10P | | |
| 486 | | B | CONNECTOR | * | CN5000 | 1-818-656-21 | HEADER ASSEMBLY 30P | | |
| 487 | | B | CONNECTOR | | CN5400 | 1-794-930-21 | CONNECTOR, D SUB | | |
| 488 | | B | DIODE | | D1002 | 8-719-077-59 | DIODE 1PS302 | | |
| 489 | | B | DIODE | | D1003 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 490 | | B | DIODE | | D1004 | 8-719-024-77 | DIODE HN1D03FU-TE85L | | |
| 491 | | B | DIODE | | D1005 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 492 | | B | DIODE | | D1008 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 493 | | B | DIODE | | D1009 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 494 | | B | DIODE | | D1010 | 8-719-036-94 | DIODE RD5.6SB-T1 | | |
| 495 | | B | DIODE | | D1011 | 8-719-036-94 | DIODE RD5.6SB-T1 | | |
| 496 | | B | DIODE | | D5400 | 8-719-073-39 | DIODE HZU5.6GTRF | | |
| 497 | | B | DIODE | | D5401 | 8-719-073-39 | DIODE HZU5.6GTRF | | |
| 498 | | B | DIODE | | D5402 | 8-719-073-39 | DIODE HZU5.6GTRF | | |
| 499 | | B | DIODE | | D5405 | 8-719-801-78 | DIODE 1SS184 | | |
| 500 | | B | DIODE | | D5700 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 501 | | B | DIODE | | D5701 | 8-719-073-34 | DIODE EC21QS03L-TE12L | | |
| 502 | | B | DIODE | | D5702 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 503 | | B | DIODE | | D5703 | 8-719-073-34 | DIODE EC21QS03L-TE12L | | |
| 504 | | B | DIODE | | D5704 | 8-719-056-83 | DIODE UDZ-TE-17-6.8B | | |
| 505 | | B | DIODE | | D5705 | 8-719-056-83 | DIODE UDZ-TE-17-6.8B | | |
| 506 | | B | DIODE | | D5708 | 8-719-073-34 | DIODE EC21QS03L-TE12L | | |
| 507 | | B | DIODE | | D5709 | 8-719-073-34 | DIODE EC21QS03L-TE12L | | |
| 508 | | B | DIODE | | D7400 | 8-719-421-67 | DIODE MA132WK | | |
| 509 | | B | DIODE | | D7401 | 8-719-421-67 | DIODE MA132WK | | |
| 510 | | B | FUSE | △ | F5700 | 1-576-770-21 | FUSE 2A 125V | | |
| 511 | | B | FERRITE BEAD | | FB1006 | 1-414-445-11 | FERRITE 0UH | | |
| 512 | | B | FERRITE BEAD | | FB5400 | 1-469-100-21 | FERRITE 0UH | | |
| 513 | | B | FERRITE BEAD | | FB5401 | 1-469-100-21 | FERRITE 0UH | | |
| 514 | | B | FERRITE BEAD | | FB5402 | 1-469-100-21 | FERRITE 0UH | | |
| 515 | | B | FERRITE BEAD | | FB5403 | 1-400-141-22 | FERRITE 0UH | | |
| 516 | | B | FERRITE BEAD | | FB5500 | 1-400-179-21 | INDUCTOR 0UH | | |
| 517 | | B | FERRITE BEAD | | FB5501 | 1-400-179-21 | INDUCTOR 0UH | | |
| 518 | | B | FERRITE BEAD | | FB5502 | 1-400-179-21 | INDUCTOR 0UH | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|--------------|-----|----------|--------------|---------------------------|---------------|-----------|
| 519 | | B | FERRITE BEAD | | FB7400 | 1-414-760-21 | FERRITE 0UH | | |
| 520 | | B | FILTER | | FL1001 | 1-234-177-21 | FERRITE 0UH | | |
| 521 | | B | FILTER | | FL5000 | 1-234-177-21 | FERRITE 0UH | | |
| 522 | | B | FILTER | | FL5001 | 1-234-177-21 | FERRITE 0UH | | |
| 523 | | B | FILTER | | FL5002 | 1-234-177-21 | FERRITE 0UH | | |
| 524 | | B | FILTER | | FL5003 | 1-234-177-21 | FERRITE 0UH | | |
| 525 | | B | FILTER | | FL5004 | 1-234-177-21 | FERRITE 0UH | | |
| 526 | | B | FILTER | | FL5005 | 1-234-177-21 | FERRITE 0UH | | |
| 527 | | B | FILTER | | FL5006 | 1-234-177-21 | FERRITE 0UH | | |
| 528 | | B | FILTER | | FL5007 | 1-234-177-21 | FERRITE 0UH | | |
| 529 | | B | FILTER | | FL5500 | 1-234-177-21 | FERRITE 0UH | | |
| 530 | | B | FILTER | | FL5501 | 1-234-177-21 | FERRITE 0UH | | |
| 531 | | B | FILTER | | FL5503 | 1-234-177-21 | FERRITE 0UH | | |
| 532 | | B | IC | | IC1001 | 6-805-613-05 | IC HD64F2378-12681-06 | KLV-S26/32A10 | |
| 533 | | B | IC | | IC1001 | 6-806-211-01 | IC HD64F2378-13062-01 | KLV-S40A10 | |
| 534 | | B | IC | | IC1002 | 6-704-117-01 | IC S-1111B33MC-NYSTFG | | |
| 535 | | B | IC | | IC1003 | 8-759-592-49 | IC TC7SZ125FU(TE85R) | | |
| 536 | | B | IC | | IC1004 | 6-703-225-01 | IC S-80928CNMC-G8YT2G | | |
| 537 | | B | IC | | IC1005 | 6-704-067-01 | IC M24128-BWMN6T(A) | | |
| 538 | | B | IC | | IC1007 | 8-759-476-80 | IC LM75CIMX-3 | | |
| 539 | | B | IC | | IC1008 | 8-759-549-03 | IC SN74LV132APWR | | |
| 540 | | B | IC | | IC1009 | 6-700-108-01 | IC RV5C387A-E2-FB | | |
| 541 | | B | IC | | IC5000 | 6-708-533-01 | IC SVPEX-SREVB | | |
| 542 | | B | IC | | IC5400 | 6-704-600-01 | IC M24C02-WMN6T(B) | | |
| 543 | | B | IC | | IC5500 | 6-707-822-01 | IC EM6A9320BI-5MG | | |
| 544 | | B | IC | | IC5700 | 6-704-407-01 | IC PQ1CZ41H2ZPH | | |
| 545 | | B | IC | | IC5701 | 6-704-407-01 | IC PQ1CZ41H2ZPH | | |
| 546 | | B | IC | | IC5720 | 8-759-832-05 | IC BA18BC0FP-E2 | | |
| 547 | | B | IC | | IC5721 | 8-759-832-05 | IC BA18BC0FP-E2 | | |
| 548 | | B | IC | | IC5722 | 6-700-394-01 | IC BA25BC0FP-E2 | | |
| 549 | | B | IC | | IC5740 | 8-759-533-85 | IC L88M05T-FA-TL | | |
| 550 | | B | IC | | IC7400 | 8-759-679-54 | IC SN74LVC14APWR | | |
| 551 | | B | IC | | IC7401 | 8-759-646-02 | IC M52347FP-TE | | |
| 552 | | B | COIL | | L1001 | 1-400-180-21 | INDUCTOR 0UH | | |
| 553 | | B | COIL | | L1002 | 1-400-180-21 | INDUCTOR 0UH | | |
| 554 | | B | COIL | | L1003 | 1-400-180-21 | INDUCTOR 0UH | | |
| 555 | | B | COIL | | L1007 | 1-400-180-21 | INDUCTOR 0UH | | |
| 556 | | B | COIL | | L1009 | 1-400-180-21 | INDUCTOR 0UH | | |
| 557 | | B | COIL | | L1010 | 1-400-179-21 | INDUCTOR 0UH | | |
| 558 | | B | COIL | | L5000 | 1-414-394-11 | INDUCTOR 2.2UH | | |
| 559 | | B | COIL | | L5001 | 1-414-394-11 | INDUCTOR 2.2UH | | |
| 560 | | B | COIL | | L5002 | 1-414-394-11 | INDUCTOR 2.2UH | | |
| 561 | | B | COIL | | L5003 | 1-414-394-11 | INDUCTOR 2.2UH | | |
| 562 | | B | COIL | | L5004 | 1-400-179-21 | INDUCTOR 0UH | | |
| 563 | | B | COIL | | L5005 | 1-400-179-21 | INDUCTOR 0UH | | |
| 564 | | B | COIL | | L5006 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 565 | | B | COIL | | L5007 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 566 | | B | COIL | | L5008 | 1-456-984-11 | INDUCTOR 0UH | | |
| 567 | | B | COIL | | L5009 | 1-456-984-11 | INDUCTOR 0UH | | |
| 568 | | B | COIL | | L5010 | 1-400-179-21 | INDUCTOR 0UH | | |
| 569 | | B | COIL | | L5011 | 1-400-180-21 | INDUCTOR 0UH | | |
| 570 | | B | COIL | | L5012 | 1-456-984-11 | INDUCTOR 0UH | | |
| 571 | | B | COIL | | L5013 | 1-456-984-11 | INDUCTOR 0UH | | |
| 572 | | B | COIL | | L5014 | 1-456-984-11 | INDUCTOR 0UH | | |
| 573 | | B | COIL | | L5015 | 1-400-179-21 | INDUCTOR 0UH | | |
| 574 | | B | COIL | | L5700 | 1-409-529-41 | INDUCTOR 10UH | | |
| 575 | | B | COIL | | L5701 | 1-456-786-21 | INDUCTOR 47UH | | |
| 576 | | B | COIL | | L5702 | 1-456-786-21 | INDUCTOR 47UH | | |
| 577 | | B | COIL | | L5729 | 1-400-784-21 | INDUCTOR 4.7UH | | |
| 578 | | B | IC LINK | △ | PS5400 | 1-576-122-21 | IC LINK 0.4A 72V | | |
| 579 | | B | TRANSISTOR | | Q1001 | 8-729-045-62 | TRANSISTOR 2SK2158-T2B | | |
| 580 | | B | TRANSISTOR | | Q1002 | 8-729-045-62 | TRANSISTOR 2SK2158-T2B | | |
| 581 | | B | TRANSISTOR | | Q1003 | 8-729-045-62 | TRANSISTOR 2SK2158-T2B | | |
| 582 | | B | TRANSISTOR | | Q1004 | 8-729-045-62 | TRANSISTOR 2SK2158-T2B | | |
| 583 | | B | TRANSISTOR | | Q1009 | 8-729-013-28 | TRANSISTOR HN1B01FU-TE85R | | |
| 584 | | B | TRANSISTOR | | Q1010 | 8-729-043-27 | TRANSISTOR PDTCT114EK-115 | | |
| 585 | | B | TRANSISTOR | | Q1015 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 586 | | B | TRANSISTOR | | Q5700 | 8-729-046-04 | TRANSISTOR FDS6690A | | |
| 587 | | B | TRANSISTOR | | Q7401 | 8-729-927-99 | TRANSISTOR 2SC4617R | | |
| 588 | | B | TRANSISTOR | | Q7402 | 8-729-927-99 | TRANSISTOR 2SC4617R | | |
| 589 | | B | TRANSISTOR | | Q7410 | 8-729-928-19 | TRANSISTOR 2SA1774R | | |
| 590 | | B | RESISTOR | | R1011 | 1-216-864-11 | SHORT CHIP 0 | | |
| 591 | | B | RESISTOR | | R1016 | 1-216-864-11 | SHORT CHIP 0 | | |
| 592 | | B | RESISTOR | | R1019 | 1-216-864-11 | SHORT CHIP 0 | | |

| No. | # | Board | Type | Δ/\ast | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|---------------|----------|--------------|---------------------------|-----------|-----------|
| 593 | | B | RESISTOR | | R1020 | 1-216-864-11 | SHORT CHIP 0 | | |
| 594 | | B | RESISTOR | | R1021 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 595 | | B | RESISTOR | | R1023 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 596 | | B | RESISTOR | | R1024 | 1-218-990-81 | SHORT CHIP 0 | | |
| 597 | | B | RESISTOR | | R1026 | 1-218-990-81 | SHORT CHIP 0 | | |
| 598 | | B | RESISTOR | | R1027 | 1-218-990-81 | SHORT CHIP 0 | | |
| 599 | | B | RESISTOR | | R1029 | 1-218-990-81 | SHORT CHIP 0 | | |
| 600 | | B | RESISTOR | | R1030 | 1-216-864-11 | SHORT CHIP 0 | | |
| 601 | | B | RESISTOR | | R1031 | 1-218-990-81 | SHORT CHIP 0 | | |
| 602 | | B | RESISTOR | | R1032 | 1-216-864-11 | SHORT CHIP 0 | | |
| 603 | | B | RESISTOR | | R1033 | 1-218-990-81 | SHORT CHIP 0 | | |
| 604 | | B | RESISTOR | | R1034 | 1-218-990-81 | SHORT CHIP 0 | | |
| 605 | | B | RESISTOR | | R1035 | 1-218-990-81 | SHORT CHIP 0 | | |
| 606 | | B | RESISTOR | | R1036 | 1-218-990-81 | SHORT CHIP 0 | | |
| 607 | | B | RESISTOR | | R1037 | 1-218-990-81 | SHORT CHIP 0 | | |
| 608 | | B | RESISTOR | | R1038 | 1-218-990-81 | SHORT CHIP 0 | | |
| 609 | | B | RESISTOR | | R1040 | 1-216-864-11 | SHORT CHIP 0 | | |
| 610 | | B | RESISTOR | | R1041 | 1-218-990-81 | SHORT CHIP 0 | | |
| 611 | | B | RESISTOR | | R1042 | 1-216-864-11 | SHORT CHIP 0 | | |
| 612 | | B | RESISTOR | | R1043 | 1-216-864-11 | SHORT CHIP 0 | | |
| 613 | | B | RESISTOR | | R1045 | 1-218-990-81 | SHORT CHIP 0 | | |
| 614 | | B | RESISTOR | | R1046 | 1-216-864-11 | SHORT CHIP 0 | | |
| 615 | | B | RESISTOR | | R1047 | 1-216-864-11 | SHORT CHIP 0 | | |
| 616 | | B | RESISTOR | | R1049 | 1-218-990-81 | SHORT CHIP 0 | | |
| 617 | | B | RESISTOR | | R1050 | 1-218-990-81 | SHORT CHIP 0 | | |
| 618 | | B | RESISTOR | | R1051 | 1-218-990-81 | SHORT CHIP 0 | | |
| 619 | | B | RESISTOR | | R1052 | 1-218-990-81 | SHORT CHIP 0 | | |
| 620 | | B | RESISTOR | | R1054 | 1-218-990-81 | SHORT CHIP 0 | | |
| 621 | | B | RESISTOR | | R1056 | 1-216-864-11 | SHORT CHIP 0 | | |
| 622 | | B | RESISTOR | | R1057 | 1-218-990-81 | SHORT CHIP 0 | | |
| 623 | | B | RESISTOR | | R1058 | 1-216-864-11 | SHORT CHIP 0 | | |
| 624 | | B | RESISTOR | | R1059 | 1-218-990-81 | SHORT CHIP 0 | | |
| 625 | | B | RESISTOR | | R1060 | 1-216-864-11 | SHORT CHIP 0 | | |
| 626 | | B | RESISTOR | | R1061 | 1-218-990-81 | SHORT CHIP 0 | | |
| 627 | | B | RESISTOR | | R1062 | 1-218-990-81 | SHORT CHIP 0 | | |
| 628 | | B | RESISTOR | | R1063 | 1-216-864-11 | SHORT CHIP 0 | | |
| 629 | | B | RESISTOR | | R1064 | 1-218-990-81 | SHORT CHIP 0 | | |
| 630 | | B | RESISTOR | | R1065 | 1-218-990-81 | SHORT CHIP 0 | | |
| 631 | | B | RESISTOR | | R1066 | 1-218-990-81 | SHORT CHIP 0 | | |
| 632 | | B | RESISTOR | | R1067 | 1-216-864-11 | SHORT CHIP 0 | | |
| 633 | | B | RESISTOR | | R1068 | 1-216-864-11 | SHORT CHIP 0 | | |
| 634 | | B | RESISTOR | | R1069 | 1-216-864-11 | SHORT CHIP 0 | | |
| 635 | | B | RESISTOR | | R1070 | 1-216-864-11 | SHORT CHIP 0 | | |
| 636 | | B | RESISTOR | | R1071 | 1-216-864-11 | SHORT CHIP 0 | | |
| 637 | | B | RESISTOR | | R1073 | 1-216-864-11 | SHORT CHIP 0 | | |
| 638 | | B | RESISTOR | | R1077 | 1-216-864-11 | SHORT CHIP 0 | | |
| 639 | | B | RESISTOR | | R1078 | 1-216-864-11 | SHORT CHIP 0 | | |
| 640 | | B | RESISTOR | | R1083 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 641 | | B | RESISTOR | | R1084 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 642 | | B | RESISTOR | | R1085 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 643 | | B | RESISTOR | | R1086 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 644 | | B | RESISTOR | | R1088 | 1-216-864-11 | SHORT CHIP 0 | | |
| 645 | | B | RESISTOR | | R1103 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 646 | | B | RESISTOR | | R1104 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 647 | | B | RESISTOR | | R1105 | 1-218-971-11 | RES-CHIP 33K 5% 1/16W | | |
| 648 | | B | RESISTOR | | R1107 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 649 | | B | RESISTOR | | R1109 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | | |
| 650 | | B | RESISTOR | | R1110 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | | |
| 651 | | B | RESISTOR | | R1111 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 652 | | B | RESISTOR | | R1112 | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W | | |
| 653 | | B | RESISTOR | | R1116 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 654 | | B | RESISTOR | | R1117 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 655 | | B | RESISTOR | | R1120 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 656 | | B | RESISTOR | | R1121 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 657 | | B | RESISTOR | | R1123 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 658 | | B | RESISTOR | | R1124 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 659 | | B | RESISTOR | | R1125 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 660 | | B | RESISTOR | | R1126 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 661 | | B | RESISTOR | | R1128 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 662 | | B | RESISTOR | | R1129 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 663 | | B | RESISTOR | | R1130 | 1-208-886-81 | METAL CHIP 910 0.5% 1/16W | | |
| 664 | | B | RESISTOR | | R1131 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 665 | | B | RESISTOR | | R1133 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 666 | | B | RESISTOR | | R1136 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|--------------|----------|--------------|-------------------------|---------------|-----------|
| 667 | | B | RESISTOR | | R1137 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 668 | | B | RESISTOR | | R1138 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 669 | | B | RESISTOR | | R1139 | 1-218-990-81 | SHORT CHIP 0 | | |
| 670 | | B | RESISTOR | | R1140 | 1-218-990-81 | SHORT CHIP 0 | | |
| 671 | | B | RESISTOR | | R1141 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | KLV-S26/32A10 | |
| 672 | | B | RESISTOR | | R1141 | 1-218-929-11 | RES-CHIP 10 5% 1/16W | KLV-S40A10 | |
| 673 | | B | RESISTOR | | R1142 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 674 | | B | RESISTOR | | R1143 | 1-218-945-11 | RES-CHIP 220 5% 1/16W | | |
| 675 | | B | RESISTOR | | R1144 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 676 | | B | RESISTOR | | R1145 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 677 | | B | RESISTOR | | R1146 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 678 | | B | RESISTOR | | R1147 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 679 | | B | RESISTOR | | R1148 | 1-218-929-11 | RES-CHIP 10 5% 1/16W | | |
| 680 | | B | RESISTOR | | R1149 | 1-218-990-81 | SHORT CHIP 0 | | |
| 681 | | B | RESISTOR | | R1150 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 682 | | B | RESISTOR | | R1151 | 1-218-990-81 | SHORT CHIP 0 | | |
| 683 | | B | RESISTOR | | R1152 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 684 | | B | RESISTOR | | R1153 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 685 | | B | RESISTOR | | R1154 | 1-218-990-81 | SHORT CHIP 0 | | |
| 686 | | B | RESISTOR | | R1155 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 687 | | B | RESISTOR | | R1156 | 1-218-990-81 | SHORT CHIP 0 | | |
| 688 | | B | RESISTOR | | R1157 | 1-218-990-81 | SHORT CHIP 0 | | |
| 689 | | B | RESISTOR | | R1158 | 1-218-990-81 | SHORT CHIP 0 | | |
| 690 | | B | RESISTOR | | R1159 | 1-218-990-81 | SHORT CHIP 0 | | |
| 691 | | B | RESISTOR | | R1160 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 692 | | B | RESISTOR | | R1161 | 1-218-990-81 | SHORT CHIP 0 | | |
| 693 | | B | RESISTOR | | R1163 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 694 | | B | RESISTOR | | R1164 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 695 | | B | RESISTOR | | R1167 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 696 | | B | RESISTOR | | R1168 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 697 | | B | RESISTOR | | R1169 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 698 | | B | RESISTOR | | R1170 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 699 | | B | RESISTOR | | R1171 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 700 | | B | RESISTOR | | R1172 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 701 | | B | RESISTOR | | R1173 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 702 | | B | RESISTOR | | R1174 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 703 | | B | RESISTOR | | R1175 | 1-218-990-81 | SHORT CHIP 0 | | |
| 704 | | B | RESISTOR | | R1176 | 1-218-971-11 | RES-CHIP 33K 5% 1/16W | | |
| 705 | | B | RESISTOR | | R1177 | 1-218-990-81 | SHORT CHIP 0 | | |
| 706 | | B | RESISTOR | | R1178 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 707 | | B | RESISTOR | | R1179 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 708 | | B | RESISTOR | | R1180 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 709 | | B | RESISTOR | | R1182 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 710 | | B | RESISTOR | | R1183 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 711 | | B | RESISTOR | | R1184 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 712 | | B | RESISTOR | | R1185 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 713 | | B | RESISTOR | | R1186 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 714 | | B | RESISTOR | | R1187 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 715 | | B | RESISTOR | | R1188 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 716 | | B | RESISTOR | | R1189 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 717 | | B | RESISTOR | | R1190 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 718 | | B | RESISTOR | | R1193 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 719 | | B | RESISTOR | | R1194 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 720 | | B | RESISTOR | | R1195 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 721 | | B | RESISTOR | | R1196 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 722 | | B | RESISTOR | | R1198 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 723 | | B | RESISTOR | | R1199 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 724 | | B | RESISTOR | | R1200 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 725 | | B | RESISTOR | | R1201 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 726 | | B | RESISTOR | | R1203 | 1-218-959-11 | RES-CHIP 3.3K 5% 1/16W | | |
| 727 | | B | RESISTOR | | R1205 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 728 | | B | RESISTOR | | R1208 | 1-218-945-11 | RES-CHIP 220 5% 1/16W | | |
| 729 | | B | RESISTOR | | R1209 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 730 | | B | RESISTOR | | R1210 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 731 | | B | RESISTOR | | R1211 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 732 | | B | RESISTOR | | R1212 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 733 | | B | RESISTOR | | R1213 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 734 | | B | RESISTOR | | R1214 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 735 | | B | RESISTOR | | R1215 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 736 | | B | RESISTOR | | R1217 | 1-216-864-11 | SHORT CHIP 0 | | |
| 737 | | B | RESISTOR | | R1218 | 1-216-864-11 | SHORT CHIP 0 | | |
| 738 | | B | RESISTOR | | R1219 | 1-216-864-11 | SHORT CHIP 0 | | |
| 739 | | B | RESISTOR | | R1220 | 1-216-864-11 | SHORT CHIP 0 | | |
| 740 | | B | RESISTOR | | R1221 | 1-216-864-11 | SHORT CHIP 0 | | |

| No. | # | Board | Type | Δ/\ast | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|---------------|----------|--------------|----------------------------|---------------|-----------|
| 741 | | B | RESISTOR | | R1222 | 1-216-864-11 | SHORT CHIP 0 | | |
| 742 | | B | RESISTOR | | R1223 | 1-216-864-11 | SHORT CHIP 0 | | |
| 743 | | B | RESISTOR | | R1224 | 1-216-864-11 | SHORT CHIP 0 | | |
| 744 | | B | RESISTOR | | R1225 | 1-216-864-11 | SHORT CHIP 0 | | |
| 745 | | B | RESISTOR | | R1228 | 1-216-864-11 | SHORT CHIP 0 | | |
| 746 | | B | RESISTOR | | R1229 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | | |
| 747 | | B | RESISTOR | | R1230 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 748 | | B | RESISTOR | | R1231 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 749 | | B | RESISTOR | | R1232 | 1-216-864-11 | SHORT CHIP 0 | | |
| 750 | | B | RESISTOR | | R1233 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 751 | | B | RESISTOR | | R1234 | 1-216-864-11 | SHORT CHIP 0 | | |
| 752 | | B | RESISTOR | | R1235 | 1-218-990-81 | SHORT CHIP 0 | | |
| 753 | | B | RESISTOR | | R1236 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 754 | | B | RESISTOR | | R1237 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 755 | | B | RESISTOR | | R1238 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | KLV-S26/32A10 | |
| 756 | | B | RESISTOR | | R1238 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | KLV-S40A10 | |
| 757 | | B | RESISTOR | | R1239 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 758 | | B | RESISTOR | | R1240 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 759 | | B | RESISTOR | | R1244 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 760 | | B | RESISTOR | | R1245 | 1-218-990-81 | SHORT CHIP 0 | | |
| 761 | | B | RESISTOR | | R1246 | 1-218-990-81 | SHORT CHIP 0 | | |
| 762 | | B | RESISTOR | | R1247 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 763 | | B | RESISTOR | | R1248 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 764 | | B | RESISTOR | | R1249 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 765 | | B | RESISTOR | | R5000 | 1-216-864-11 | SHORT CHIP 0 | | |
| 766 | | B | RESISTOR | | R5001 | 1-216-864-11 | SHORT CHIP 0 | | |
| 767 | | B | RESISTOR | | R5002 | 1-216-864-11 | SHORT CHIP 0 | | |
| 768 | | B | RESISTOR | | R5003 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 769 | | B | RESISTOR | | R5005 | 1-216-864-11 | SHORT CHIP 0 | | |
| 770 | | B | RESISTOR | | R5009 | 1-216-295-91 | SHORT CHIP 0 | | |
| 771 | | B | RESISTOR | | R5010 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 772 | | B | RESISTOR | | R5012 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 773 | | B | RESISTOR | | R5014 | 1-218-990-81 | SHORT CHIP 0 | | |
| 774 | | B | RESISTOR | | R5015 | 1-216-864-11 | SHORT CHIP 0 | | |
| 775 | | B | RESISTOR | | R5016 | 1-216-864-11 | SHORT CHIP 0 | | |
| 776 | | B | RESISTOR | | R5017 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 777 | | B | RESISTOR | | R5022 | 1-216-864-11 | SHORT CHIP 0 | | |
| 778 | | B | RESISTOR | | R5023 | 1-216-864-11 | SHORT CHIP 0 | | |
| 779 | | B | RESISTOR | | R5032 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 780 | | B | RESISTOR | | R5033 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 781 | | B | RESISTOR | | R5040 | 1-216-864-11 | SHORT CHIP 0 | | |
| 782 | | B | RESISTOR | | R5043 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 783 | | B | RESISTOR | | R5050 | 1-218-990-81 | SHORT CHIP 0 | | |
| 784 | | B | RESISTOR | | R5051 | 1-218-990-81 | SHORT CHIP 0 | | |
| 785 | | B | RESISTOR | | R5052 | 1-218-990-81 | SHORT CHIP 0 | | |
| 786 | | B | RESISTOR | | R5053 | 1-218-990-81 | SHORT CHIP 0 | | |
| 787 | | B | RESISTOR | | R5054 | 1-218-990-81 | SHORT CHIP 0 | | |
| 788 | | B | RESISTOR | | R5055 | 1-218-990-81 | SHORT CHIP 0 | | |
| 789 | | B | RESISTOR | | R5056 | 1-218-990-81 | SHORT CHIP 0 | | |
| 790 | | B | RESISTOR | | R5057 | 1-218-990-81 | SHORT CHIP 0 | | |
| 791 | | B | RESISTOR | | R5059 | 1-218-990-81 | SHORT CHIP 0 | | |
| 792 | | B | RESISTOR | | R5065 | 1-218-990-81 | SHORT CHIP 0 | | |
| 793 | | B | RESISTOR | | R5068 | 1-218-990-81 | SHORT CHIP 0 | | |
| 794 | | B | RESISTOR | | R5070 | 1-216-864-11 | SHORT CHIP 0 | | |
| 795 | | B | RESISTOR | | R5071 | 1-216-864-11 | SHORT CHIP 0 | | |
| 796 | | B | RESISTOR | | R5400 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 797 | | B | RESISTOR | | R5404 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 798 | | B | RESISTOR | | R5409 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 799 | | B | RESISTOR | | R5410 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 800 | | B | RESISTOR | | R5411 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 801 | | B | RESISTOR | | R5412 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 802 | | B | RESISTOR | | R5413 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 803 | | B | RESISTOR | | R5414 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 804 | | B | RESISTOR | | R5417 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 805 | | B | RESISTOR | | R5418 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 806 | | B | RESISTOR | | R5419 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 807 | | B | RESISTOR | | R5420 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 808 | | B | RESISTOR | | R5421 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 809 | | B | RESISTOR | | R5422 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 810 | | B | RESISTOR | | R5424 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 811 | | B | RESISTOR | | R5425 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 812 | | B | RESISTOR | | R5426 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 813 | | B | RESISTOR | | R5427 | 1-216-864-11 | SHORT CHIP 0 | | |
| 814 | | B | RESISTOR | | R5428 | 1-216-864-11 | SHORT CHIP 0 | | |

| No. | # | Board | Type | Δ/\ast | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|---------------|----------|--------------|----------------------------|-----------|-----------|
| 815 | | B | RESISTOR | | R5429 | 1-216-295-91 | SHORT CHIP 0 | | |
| 816 | | B | RESISTOR | | R5500 | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W | | |
| 817 | | B | RESISTOR | | R5501 | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W | | |
| 818 | | B | RESISTOR | | R5502 | 1-211-986-11 | METAL CHIP 51 0.5% 1/10W | | |
| 819 | | B | RESISTOR | | R5503 | 1-211-986-11 | METAL CHIP 51 0.5% 1/10W | | |
| 820 | | B | RESISTOR | | R5504 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 821 | | B | RESISTOR | | R5505 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 822 | | B | RESISTOR | | R5506 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 823 | | B | RESISTOR | | R5507 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 824 | | B | RESISTOR | | R5508 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 825 | | B | RESISTOR | | R5509 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 826 | | B | RESISTOR | | R5510 | 1-218-990-81 | SHORT CHIP 0 | | |
| 827 | | B | RESISTOR | | R5511 | 1-218-990-81 | SHORT CHIP 0 | | |
| 828 | | B | RESISTOR | | R5512 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 829 | | B | RESISTOR | | R5513 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 830 | | B | RESISTOR | | R5514 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 831 | | B | RESISTOR | | R5515 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 832 | | B | RESISTOR | | R5516 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 833 | | B | RESISTOR | | R5532 | 1-216-295-91 | SHORT CHIP 0 | | |
| 834 | | B | RESISTOR | | R5533 | 1-216-295-91 | SHORT CHIP 0 | | |
| 835 | | B | RESISTOR | | R5534 | 1-216-864-11 | SHORT CHIP 0 | | |
| 836 | | B | RESISTOR | | R5536 | 1-216-296-11 | SHORT CHIP 0 | | |
| 837 | | B | RESISTOR | | R5700 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 838 | | B | RESISTOR | | R5701 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 839 | | B | RESISTOR | | R5702 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 840 | | B | RESISTOR | | R5703 | 1-216-815-11 | METAL CHIP 330 5% 1/10W | | |
| 841 | | B | RESISTOR | | R5704 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 842 | | B | RESISTOR | | R5707 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 843 | | B | RESISTOR | | R5710 | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W | | |
| 844 | | B | RESISTOR | | R5711 | 1-218-853-11 | METAL CHIP 1.8K 0.5% 1/10W | | |
| 845 | | B | RESISTOR | | R5714 | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W | | |
| 846 | | B | RESISTOR | | R5715 | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W | | |
| 847 | | B | RESISTOR | | R5716 | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W | | |
| 848 | | B | RESISTOR | | R5717 | 1-216-295-91 | SHORT CHIP 0 | | |
| 849 | | B | RESISTOR | | R5718 | 1-216-295-91 | SHORT CHIP 0 | | |
| 850 | | B | RESISTOR | | R5722 | 1-216-295-91 | SHORT CHIP 0 | | |
| 851 | | B | RESISTOR | | R5726 | 1-216-295-91 | SHORT CHIP 0 | | |
| 852 | | B | RESISTOR | | R5727 | 1-216-295-91 | SHORT CHIP 0 | | |
| 853 | | B | RESISTOR | | R5732 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 854 | | B | RESISTOR | | R5742 | 1-216-295-91 | SHORT CHIP 0 | | |
| 855 | | B | RESISTOR | | R5743 | 1-216-295-91 | SHORT CHIP 0 | | |
| 856 | | B | RESISTOR | | R7400 | 1-208-713-11 | METAL CHIP 18K 0.5% 1/16W | | |
| 857 | | B | RESISTOR | | R7401 | 1-208-715-11 | METAL CHIP 22K 0.5% 1/16W | | |
| 858 | | B | RESISTOR | | R7402 | 1-218-949-11 | RES-CHIP 470 5% 1/16W | | |
| 859 | | B | RESISTOR | | R7403 | 1-208-715-11 | METAL CHIP 22K 0.5% 1/16W | | |
| 860 | | B | RESISTOR | | R7404 | 1-208-713-11 | METAL CHIP 18K 0.5% 1/16W | | |
| 861 | | B | RESISTOR | | R7407 | 1-218-949-11 | RES-CHIP 470 5% 1/16W | | |
| 862 | | B | RESISTOR | | R7410 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 863 | | B | RESISTOR | | R7411 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 864 | | B | RESISTOR | | R7413 | 1-218-949-11 | RES-CHIP 470 5% 1/16W | | |
| 865 | | B | RESISTOR | | R7417 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 866 | | B | RESISTOR | | R7418 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 867 | | B | RESISTOR | | R7420 | 1-218-955-11 | RES-CHIP 1.5K 5% 1/16W | | |
| 868 | | B | RESISTOR | | R7424 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 869 | | B | RESISTOR | | R7432 | 1-218-990-81 | SHORT CHIP 0 | | |
| 870 | | B | RESISTOR | | R7433 | 1-218-953-11 | RES-CHIP 1K 5% 1/16W | | |
| 871 | | B | RESISTOR | | R7435 | 1-208-931-11 | METAL CHIP 68K 0.5% 1/16W | | |
| 872 | | B | RESISTOR | | R7436 | 1-218-953-11 | RES-CHIP 1K 5% 1/16W | | |
| 873 | | B | RESISTOR | | R7439 | 1-218-990-81 | SHORT CHIP 0 | | |
| 874 | | B | RESISTOR | | R7440 | 1-218-990-81 | SHORT CHIP 0 | | |
| 875 | | B | RESISTOR | | R7443 | 1-218-990-81 | SHORT CHIP 0 | | |
| 876 | | B | RESISTOR | | R7444 | 1-218-990-81 | SHORT CHIP 0 | | |
| 877 | | B | RESISTOR | | R7445 | 1-208-699-11 | METAL CHIP 4.7K 0.5% 1/16W | | |
| 878 | | B | RESISTOR | | R7446 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 879 | | B | RESISTOR | | R7447 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 880 | | B | RESISTOR | | R7448 | 1-218-990-81 | SHORT CHIP 0 | | |
| 881 | | B | RESISTOR | | R7449 | 1-218-953-11 | RES-CHIP 1K 5% 1/16W | | |
| 882 | | B | RESISTOR | | R7450 | 1-208-927-11 | METAL CHIP 47K 0.5% 1/16W | | |
| 883 | | B | RESISTOR | | R7451 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 884 | | B | RESISTOR | | R7452 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 885 | | B | RESISTOR | | R7453 | 1-218-990-81 | SHORT CHIP 0 | | |
| 886 | | B | RESISTOR | | R7454 | 1-218-990-81 | SHORT CHIP 0 | | |
| 887 | | B | RESISTOR | | R7455 | 1-218-990-81 | SHORT CHIP 0 | | |
| 888 | | B | RESISTOR | | R7456 | 1-208-691-11 | METAL CHIP 2.2K 0.5% 1/16W | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|------------|--------------|----------|--------------|----------------------------|-----------|-----------|
| 889 | | B | RESISTOR | | R7459 | 1-208-691-11 | METAL CHIP 2.2K 0.5% 1/16W | | |
| 890 | | B | RESISTOR | | R7460 | 1-218-849-11 | METAL CHIP 1.2K 0.5% 1/10W | | |
| 891 | | B | RESISTOR | | R7461 | 1-208-683-11 | METAL CHIP 1K 0.5% 1/16W | | |
| 892 | | B | RESISTOR | | R7469 | 1-218-849-11 | METAL CHIP 1.2K 0.5% 1/10W | | |
| 893 | | B | NETWORK | | RB1001 | 1-234-380-21 | RES, NETWORK 47K (1005X4) | | |
| 894 | | B | NETWORK | | RB1002 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 895 | | B | NETWORK | | RB1003 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 896 | | B | NETWORK | | RB1004 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 897 | | B | NETWORK | | RB1005 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 898 | | B | NETWORK | | RB1006 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 899 | | B | NETWORK | | RB1007 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 900 | | B | NETWORK | | RB1008 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 901 | | B | NETWORK | | RB1009 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 902 | | B | NETWORK | | RB1010 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 903 | | B | NETWORK | | RB1011 | 1-234-378-21 | RES, NETWORK 10K (1005X4) | | |
| 904 | | B | NETWORK | | RB1012 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 905 | | B | NETWORK | | RB1013 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 906 | | B | NETWORK | | RB1014 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 907 | | B | NETWORK | | RB1015 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 908 | | B | NETWORK | | RB1016 | 1-234-375-21 | RES, NETWORK 1K (1005X4) | | |
| 909 | | B | NETWORK | | RB1017 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 910 | | B | NETWORK | | RB1018 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 911 | | B | NETWORK | | RB1019 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 912 | | B | NETWORK | | RB1020 | 1-234-378-21 | RES, NETWORK 10K (1005X4) | | |
| 913 | | B | NETWORK | | RB1021 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 914 | | B | NETWORK | | RB1022 | 1-234-372-21 | RES, NETWORK 100 (1005X4) | | |
| 915 | | B | NETWORK | | RB5500 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 916 | | B | NETWORK | | RB5501 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 917 | | B | NETWORK | | RB5502 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 918 | | B | NETWORK | | RB5503 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 919 | | B | NETWORK | | RB5504 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 920 | | B | NETWORK | | RB5505 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 921 | | B | NETWORK | | RB5506 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 922 | | B | NETWORK | | RB5507 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 923 | | B | NETWORK | | RB5509 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 924 | | B | NETWORK | | RB5510 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 925 | | B | NETWORK | | RB5511 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 926 | | B | NETWORK | | RB5512 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 927 | | B | THERMISTOR | | TH7400 | 1-809-350-21 | THERMISTOR, NTC (2125) | | |
| 928 | | B | VARISTOR | | VD5400 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 929 | | B | VARISTOR | | VD5401 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 930 | | B | VARISTOR | | VD5402 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 931 | | B | VARISTOR | | VD5403 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 932 | | B | VARISTOR | | VD5404 | 1-803-974-21 | VARISTOR, CHIP (1608) | | |
| 933 | | B | CRYSTAL | | X1001 | 1-813-326-21 | VIBRATOR, CRYSTAL | | |
| 934 | | B | CRYSTAL | | X5000 | 1-795-790-11 | VIBRATOR, CRYSTAL | | |
| 935 | | B | CRYSTAL | | X5302 | 1-795-029-41 | VIBRATOR, CRYSTAL | | |